



Industrial Automation and Control Cables

18

**Table of Contents**

Industrial Automation and Control Cables	Page No.
<b>Introduction</b>	<b>18.2</b>
<b>PLC/DCS Cross Reference Guide</b>	<b>18.2-18.5</b>
<b>Industrial Communications Protocol</b>	<b>18.6</b>
<b>Industrial Data Solutions®</b>	<b>18.7-18.29</b>
Industrial Ethernet:	
Introduction: Overview	18.7
DataTuff® Twisted Pair Cables, Category 5e	18.8
DataTuff Twisted Pair Cables, Category 6	18.11
TrayOptic® Fiber Optic Cables	18.12
Coaxial Cables	18.13
Industrial Twinax:	
Belden® Blue Hose® Selection Guide for PLC/DCS Applications	18.14
Blue Hose Cables	18.15
Twinaxial Cables	18.16
DataTray® 600V Twinaxial Cables	18.18
Industrial Coax:	
ControlNet™ Quad Shielded Coax	18.19
ControlBus™ Quad Shielded Coax	18.20
Industrial Data:	
DataBus® ISA/SP-50 FOUNDATION Fieldbus or Profibus Cables	18.21
DeviceBus® for ODVA DeviceNet™	18.22
DeviceBus for Honeywell Smart Distributed System	18.25
DeviceBus for Square D/Seriplex®	18.26
DeviceBus for Phoenix Contact InterBus®-S	18.27
EIA Industrial RS-485 PLTC/CM	18.28
Interconnect	18.29
<b>VFD (Variable Frequency Drive) Cable</b>	<b>18.30</b>
<b>Belden Infinity® Flexible Automation Cable</b>	<b>18.31-18.40</b>
Introduction: Overview & Application Guide	18.31
C-TC+ Control Cables: 600V Multi-conductor	18.32
FCC Control Cables: 600V Multi-conductor	18.34
Flex Data Cables: 300V Twisted Pairs	18.39
Flex Vision Cables: 75 Ohm Coax	18.40
<b>UL Instrumentation Cable</b>	<b>18.41-18.62</b>
300V Power-limited Tray Cables: Overview	18.41
300V PLTC/ITC: Pairs & Triads	18.42
Thermocouple Extension Cable & Wire: Overview	18.53
Thermocouple Extension Cables: Shielded Pairs	18.54
Thermocouple Extension Cables: High-Temperature, Plenum	18.55
Thermocouple Wire: Unshielded	18.55
600V Tray Cables: Overview	18.56
600V Tray Cables: Pairs & Triads	18.57
<b>UL Control Cable</b>	<b>18.63-18.76</b>
600V Type TC Cables: Overview	18.63
600V Type TC Cables: Multi-conductor	18.64
600V Type MC & Teck-Style® Cables: Overview	18.70
600V Type MC Cables: Multi-conductor	18.71
600V Dual-rated Type MC/Teck 90 Teck-Style Cables	18.74
<b>CSA Instrumentation Cable</b>	<b>18.77-18.83</b>
300V TC/CIC: Pairs & Triads	18.77
300V CIC: Pairs & Triads and Overview	18.78
300V ACIC: Armored Pairs & Triads	18.80
600V CIC: Pairs & Triads	18.82
600V ACIC: Armored Pairs & Triads	18.83
<b>CSA Control Cable</b>	<b>18.84-18.95</b>
600V and 1000V: TC/CIC Multi-conductor	18.84
600V: CIC Multi-conductor	18.85
600V: ACIC & Teck90	18.87
1000V: Teck90	18.92
1000V: VFD Cable	18.95
<b>Technical Information</b>	<b>18.96-18.98</b>

ControlNet is a ControlNet International trademark. • DeviceNet is an Open DeviceNet Vendor Association, Inc. trademark. Interbus is a Phoenix Contact trademarks. • Seriplex is a Square D/Schneider AEG registered trademark.



# Belden IndustrialTuff® Cables

## Introduction

### Tough Cables for Tough Environments

Today, more than ever, manufacturing productivity depends upon seamless data communication and automation systems. And both depend upon high-performance cabling solutions.

#### Depend on Belden

Belden has developed the world's most comprehensive line of industrial cabling solutions for applications like yours: whether you are networking your factory floor or your process equipment and devices to their controllers...and on to the control room, or relaying data between the control room, the engineering department, and remote manufacturing sites — or, all of the above. From your petrochemical, automotive manufacturing, pharmaceutical, power generation, pulp and paper, metals, food and beverage, or general manufacturing plant to your corporate headquarters — and everywhere in between — Belden has your cabling solution.

Most importantly you can have the peace-of-mind that is inherent with the use of Belden products since all Belden cables are manufactured in ISO 9001:2000 certified facilities to the industry's highest standards of quality, utilizing the most advanced equipment, systems, controls and processes available.

Belden cables give you the performance you need day after dependable day.

### Innovative Technology

#### Bonded-Pairs

Many DataTuff® Industrial Ethernet cables feature Belden's patented bonded-pair technology. Bonded-pairs provide *Installable Performance*® — superior electrical performance even after the stresses of installation. Bonded-pairs exhibit the most robust and reliable electrical performance in the industry.

#### Shielding

The evolution of technology maintains steady demand for sophisticated cable shielding. Belden meets that demand with innovative shielding and shield effectiveness testing methods to supply you with high quality, dependable cable.

Belden's exclusive patented Beldfoil® design, with its aluminum/polyester foil, was the first shield to offer 100 percent cable protection against radiated emission and ingress at audio and radio frequencies.

#### Armoring

Belden's innovative armoring technology delivers maximum physical protection in harsh environments. Additional benefits include reduced cost of conduit, easier installation and re-routing, plus additional shielding.

Belden has the capability to protect data, electronic, instrumentation and control cables with interlocking steel or aluminum armor as well as continuous corrugated aluminum armor. Smooth or corrugated protective metal tapes are also available.

#### Insulation and Jacket

Belden formulates many of its own insulations and jacket compounds. As a result, they provide superior performance under a variety of hostile environmental conditions. See "Technical Information" at the back of this section for further details.

#### Intrinsically Safe Wiring

In accordance with NEC Article 504, intrinsically safe cables are colored blue for easy identification. Belden offers several industrial cables in intrinsically safe blue to meet your requirements for intrinsically safe wiring. Contact the NEC and/or your local inspector for specific guidelines.

#### Custom Capabilities

Most of our Industrial cables are available from stock. Many of these are available off the shelf from distributors. If you have a new or unusual application or you cannot find an Industrial cable in this catalog section that meets your technical requirements, contact Technical Support at 1-800-BELDEN-1.

#### To Specify Part Number:

<b>1</b>	<b>2</b>	<b>3456</b>
Overall Jacket Type	Armor Type	Core Trade Number

#### Overall Jacket Type    Armor Type

Code	Material	Code	Material
1	PVC	2	Aluminum Interlock
3	CPE	3	Steel Interlock
4	TPE	8	Continuous Corrugated Aluminum
5	HDPE		
6	Oil Res II		
7	Haloarrest®		

# PLC/DCS Cable Cross Reference Guide

PLC/DCS Manufacturer	System Name	Belden Part Number	
<b>ABB/Bailey Controls</b>	<b>FOUNDATION Fieldbus</b>	See Protocol listings on page 8.6	
	<b>Industrial IT 800 X A</b>	<b>9880</b> Network Trunk Cable	
	<b>Infinet</b>	<b>9880</b> Network Trunk Cable <b>9463</b> Blue Hose® (Standard)	
	<b>Masterpiece 200</b>	<b>9880</b> Network Trunk Cable <b>9907</b> Thin Network Trunk Cable	
	<b>MICRO-DCI</b>	<b>3105A</b> 1-Pair, RS-485	
	<b>MICROLINK</b>	<b>9860</b> Twinax, 16 AWG, 124 Ohm	
	<b>Modcell</b>	<b>3105A</b> 1-Pair, RS-485	
	<b>Profibus DP &amp; PA</b>	See Protocol listings on page 8.6	
	<b>Allen-Bradley/Rockwell Automation</b>	<b>ControlNet™</b>	See Protocol listings on page 8.6
		<b>DeviceNet™</b>	See Protocol listings on page 8.6
<b>DH, DH+, Remote I/O</b>		<b>9463</b> Blue Hose (Standard) <b>9463F</b> Flexible Version (9463) <b>129463</b> Aluminum Armor (9463) <b>139463</b> Steel Armor (9463) <b>189463</b> Continuous Armor (9463) <b>YR28826</b> Dual Version (9463) <b>YC39151</b> Dual Armored (9463) <b>9463DB</b> Direct Burial (9463) <b>YR29565</b> Various Color Jackets (9463) <b>3072F</b> 600V TC Rated (9463) <b>YR41104</b> Low Smoke, Halogen Free <b>YR28764</b> Super Thick (PLTC) <b>89463</b> FEP 200°C, Plenum	
<b>DH-485</b>		<b>3074F</b> 600V Tray Cable <b>3106A</b> 1.5-Pair, RS-485 (PLTC) <b>9842</b> 2-Pair, RS-485 <b>YM39500</b> Flexible Version (3106A)	
<b>Industrial Ethernet</b>		See Protocol listings on page 8.6	
<b>Longline Communications</b>		<b>8723</b> Interface Cable <b>88723</b> Plenum Version	
<b>Cutler-Hammer/Westinghouse</b>		<b>IMPACC System</b> <b>YR29090</b> Proprietary Trunk Cable <b>I/O System</b> <b>9463</b> Blue Hose (Standard)	
<b>Emerson Process Management</b> <small>(Fisher/Rosemont Systems) —</small>		<b>DeviceNet</b>	See Protocol listings on page 8.6
		<b>FOUNDATION Fieldbus</b> <small>(Type SP50 ISA/IEC)</small>	See Protocol listings on page 8.6
		<b>HART</b>	See Protocol listings on page 8.6
		<b>Industrial Ethernet</b>	See Protocol listings on page 8.6
		<b>Modbus</b>	See Protocol listings on page 8.6
		<b>Profibus DP</b>	See Protocol listings on page 8.6
		<b>Provox Plus</b>	<b>3091A</b> RG-11 Quad Shield PVC <b>3131A</b> RG-6 Quad Shield PVC
		<b>RS-485</b>	See Protocol listings on page 8.6
<b>GE Fanuc — I/O Bus</b>		<b>DeviceNet</b>	See Protocol listings on page 8.6
		<b>Genius</b> 9030, 9070 PAC System	<b>YR29841</b> PLTC Version <b>9182</b> Communications Bus <b>89182</b> Plenum Version
		<b>Interbus®-S</b>	See Protocol listings on page 8.6
		<b>Modbus®</b>	See Protocol listings on page 8.6
		<b>Profibus</b>	See Protocol listings on page 8.6

PLC/DCS Manufacturer	System Name	Belden Part Number	
<b>GE Fanuc — Sensor Device Networks</b>	<b>DeviceNet</b>	See Protocol listings on page 8.6	
	<b>SDS</b>	See Protocol listings on page 8.6	
<b>Honeywell</b>	<b>Access 4000 System</b>	<b>9248</b> RG-6 PVC	
	<b>FOUNDATION Fieldbus</b> <small>(Type SP50 ISA/IEC)</small>	See Protocol listings on page 8.6	
	<b>IPC 620 System I/O</b>	<b>9271</b> Twinax, 25 AWG, 124 Ohm	
	<b>IPC 620 System</b>	<b>9729</b> Up to 4,000 ft.	
	<b>Serial Interface</b>	<b>9182</b> Up to 10,000 ft. <b>89182</b> Plenum	
	<b>Series C</b>	<b>RS-485</b> Foundation Fieldbus Industrial Ethernet	
	<b>3000 UCN &amp; LCN</b>	<b>3131A</b> RG-6 Quad Shield PVC	
		<b>3094A</b> RG-11 Quad Shield PVC	
	<b>Honeywell Microswitch Division</b>	<b>Smart Distributed System</b>	<b>3086A</b> Mini <b>3087A</b> Micro
		<b>FOUNDATION Fieldbus</b> <small>(Type SP50 ISA/IEC)</small>	See Protocol listings on page 8.6
<b>Invensys/Foxboro</b>	<b>I/A Series Carrier Band</b>	<b>8233</b> Small Trunk <b>3095A</b> Plenum <b>9290</b> Drop Cable	
	<b>I/A Series Fieldbus</b>	<b>9207</b> Twinax <b>89207</b> 200°C, Plenum <b>3073F</b> 600V Tray Cable	
	<b>I/A Series Node Bus</b>	<b>9880</b> Trunk Cable <b>89880</b> Plenum Version	
	<b>Industrial Ethernet</b>	See Protocol listings on page 8.6	
	<b>Limitorque</b>	<b>DCC100</b>	<b>3105A</b> Actuator Bus Cable, 1-Pair, RS-485
		<b>Matsushita</b>	<b>FP Series C-NET</b> <b>9207</b> Twinax, 20 AWG, Stranded, 100 Ohm <b>9860</b> Twinax, 16 AWG, Solid, 124 Ohm
	<b>Matsushita</b>	<b>FP Series MEWNET-F</b>	<b>9207</b> Twinax, 20 AWG, Stranded, 100 Ohm <b>9860</b> Twinax, 16 AWG, Solid, 124 Ohm
		<b>FP Series MEWNET-H</b>	<b>9248</b> RG-6, 75 Ohm, 18 AWG
		<b>FP Series MEWNET-TR</b>	<b>9207</b> Twinax, 20 AWG, Stranded, 100 Ohm
			<b>9860</b> Twinax, 16 AWG, Solid, 124 Ohm
<b>FP Series MEWNET-W</b>		<b>9207</b> Twinax, 20 AWG, Stranded, 100 Ohm	
		<b>9806</b> 4-Pair, RS-232, RS-422	
<b>FP Series MEWNET-W2</b>		<b>9207</b> Twinax, 20 AWG, Stranded, 100 Ohm <b>9860</b> Twinax, 16 AWG, Solid, 124 Ohm	
		<b>FP Series TRNET</b>	<b>9207</b> Twinax, 20 AWG, Stranded, 100 Ohm <b>9860</b> Twinax, 16 AWG, Solid, 124 Ohm

FEP = Fluorinated Ethylene-propylene



**PLC/DCS Cable Cross Reference Guide** *(continued)*

PLC/DCS Manufacturer	System Name	Belden Part Number	
<b>Mitsubishi Electric Automation</b>	<b>CC-Link</b>	See Protocol listings on page 8.6	
	<b>DeviceNet</b>	See Protocol listings on page 8.6	
	<b>Melsecnet II (10/10H)</b>	<b>1505A</b>	Precision RG-59/U Coax
		<b>1505F</b>	High-Flex 1505A
		<b>1506A</b>	Plenum Precision RG-59/U, Outdoor, Direct Burial
		<b>8241</b>	Standard RG-59/U Coax
		<b>8241F</b>	High-Flex 8241F
	<b>Modbus</b>	See Protocol listings on page 8.6	
	<b>Profibus DP</b>	See Protocol listings on page 8.6	
	<b>Serial Communications</b>	<b>8777</b> Control and Instrumentation Interconnect Cable	
<b>Modicon/Schneider AEG</b>	<b>Industrial Ethernet</b>	See Protocol listings on page 8.6	
	<b>Modbus</b>	<b>8777</b>	Modem Drop Cable, 22 AWG, 3-Pair
		<b>128777</b>	Aluminum Armor (8777)
		<b>138777</b>	Steel Armor (8777)
		<b>88777</b>	FEP 200°C, Plenum
	<b>Modbus II</b>	<b>3092A</b>	RG-6 Quad Shield PVC
		<b>3132A</b>	RG-6 Quad Shield, 150°C, Plenum
		<b>3092F</b>	RG-6 Quad Shield PVC, Flexible Version
		<b>123092A</b>	Aluminum Armor (3092A)
	<b>Modbus Plus</b>	<b>133092A</b>	Steel Armor (3092A)
		<b>YM29560</b>	24 AWG, 1-Pair, RS-485
		<b>YC39000</b>	Aluminum Armor (YM29560)
		<b>YC39222</b>	Steel Armor (YM29560)
	<b>Remote I/O</b>	<b>YQ29258</b>	24 AWG, 1-Pair, 150°C, Plenum
		<b>3092A</b>	RG-6 Quad Shield PVC
			RG-6 Quad Shield PVC, Flexible Version
		<b>3092F</b>	Aluminum Armor (3092A)
			Steel Armor (3092A)
		<b>123092A</b>	Aluminum Armor, RG-6 Quad Shield PVC
			Aluminum Armor, RG-6 Quad Shield PVC
<b>3132A</b>		RG-6 Quad Shield, 150°C, Plenum	
		RG-11 Quad Shield PVC	
<b>123094A</b>		Aluminum Armor (3094A)	
		Steel Armor (3094A)	
<b>133094A</b>		Aluminum Armor (3094A)	
		Steel Armor (3094A)	
<b>3095A</b>		RG-11 Quad Shield, 150°C, Plenum	
		RG-11 Quad Shield, 150°C, Plenum	
<b>Omron</b>		<b>ComboBus/D (DeviceNet™)</b>	See DeviceNet Protocol listings on page 8.6
	<b>ComboBus/S</b>	<b>9409</b>	18 AWG, 1-Pair, 300V PLTC Control
		<b>9318</b>	18 AWG, 1-Pair, 300V PLTC Control, Shielded
		<b>3073</b>	600V Tray Cable, Twinax
		<b>89740</b>	18 AWG, 1-Pair, 300V, Control

PLC/DCS Manufacturer	System Name	Belden Part Number
<b>Omron</b> <i>(continued)</i>	<b>Controller Link</b>	<b>9207</b> Twinax
		<b>89207</b> Twinax, 200°C, Plenum
		<b>9815</b> Twinax, 100 Ohm, Direct Burial
		<b>3073F</b> 600V Tray Cable, Twinax
		<b>3073F</b> 600V Tray Cable, Twinax
	<b>SYSBUS-2</b>	<b>3073F</b> 600V Tray Cable, Twinax
	<b>SYSMAC BUS</b>	<b>9841</b> 22 AWG, 1-Pair, RS-485
		<b>3105A</b> 22 AWG, 1-Pair, RS-485
	<b>SYSMAC LINK</b>	<b>9231</b> RG-59U Coax
	<b>Phoenix Contact</b>	<b>DeviceNet</b>
<b>Industrial Ethernet</b>		See Protocol listings on page 8.6
<b>Interbus®-S</b>		See Protocol listings on page 8.6
<b>Profibus DP FMS &amp; PA</b>		See Protocol listings on page 8.6
<b>Reliance/A-B</b>	<b>Auto Max Distributed Power</b>	<b>M98021</b> 2-Fiber Breakout
		<b>I100255</b> 2-Fiber Loose Tube PVC
		<b>I100266</b> 2-Fiber Loose Tube CPE
	<b>R-Net</b>	<b>9259</b> RG-59 PVC
<b>Rotork</b>	<b>Pakscan II E RS-485</b>	<b>89259</b> RG-59, 200°C, Plenum
		<b>3105A</b> 22 AWG, 1-Pair, RS-485
	<b>FMC (Field Mountable Controller)</b>	<b>3105A</b> 1-Pair, RS-485
		<b>3106A</b> 1.5-Pair, RS-485
		<b>3107A</b> 2-Pair, RS-485
		<b>3108A</b> 3-Pair, RS-485
		<b>3109A</b> 4-Pair, RS-485
	<b>FOUNDATION Fieldbus (Type SP50 ISA/IEC)</b>	See Protocol listings on page 8.6
	<b>Hiway</b>	<b>9860</b> Network Trunk Cable
	<b>Industrial Ethernet</b>	See Protocol listings on page 8.6
<b>MODULNET</b>	<b>3094A</b> RG-11 Quad Shield PVC	
	<b>3131A</b> RG-6 Quad Shield PVC	
<b>Profibus DP &amp; FMS (Purple)</b>	See Protocol listings on page 8.6	
<b>Profibus PA (Blue)</b>	See Protocol listings on page 8.6	
<b>SINEC Series H1</b>	<b>9907</b> Thin Network Trunk Cable	
	<b>9880</b> Network Trunk Cable	
<b>SINEC Series H2B</b>	<b>3131A</b> RG-6 Quad Shield	
	<b>3094A</b> RG-11 Quad Shield	
<b>SINEC Series L1</b>	<b>3107A</b> 2-Pair, RS-485	
<b>SINEC Series L2</b>	<b>3079A</b> 300V Twinax	
<b>Thicknet Ethernet Trunk</b>	<b>9880</b> Network Trunk Cable	
	<b>129880</b> Aluminum Interlocked Armor Trunk	
	<b>139880</b> Steel Interlocked Armor Trunk	
<b>Thinnet Ethernet Trunk</b>	<b>9907</b> Thin Network Trunk Cable	

FEP = Fluorinated Ethylene-propylene



## PLC/DCS Cable Cross Reference Guide *(continued)*

PLC/DCS Manufacturer	System Name	Belden Part Number	
<b>Smar</b>	<b>FOUNDATION Fieldbus</b> (Type SP50 ISA/IEC)	See Protocol listings on page 8.6	
	<b>Industrial Ethernet</b>	See Protocol listings on page 8.6	
	<b>Profibus DP FMS &amp; PA</b>	See Protocol listings on page 8.6	
	<b>RS-485</b>	See Protocol listings on page 8.6	
<b>Square D/ Schneider AEG</b>	<b>FIP/Fieldbus</b>	<b>3079A</b> 22 AWG, 1-Pair, Shielded <b>123079A</b> Aluminum Armor (3079A)	
	<b>Industrial Ethernet</b>	See Protocol listings on page 8.6	
	<b>Model 50, RS-422 Cable</b>	<b>8760</b> 18 AWG, 1-Pair, Shielded <b>128760</b> Aluminum Armor (8760)	
	<b>Passport I/O – I/O Net</b>	<b>3105A</b> 22 AWG, 1-Pair, RS-485 <b>123105A</b> Aluminum Armor (3105A)	
		<b>3106A</b> 22 AWG, 1.5-Pair, RS-485 <b>123106A</b> Aluminum Armor (3106A)	
		<b>Power Logic</b>	<b>9841</b> 24 AWG, 1-Pair, RS-485 <b>9842</b> 24 AWG, 2-Pair, RS-485
	<b>Square D/ Schneider AEG</b>	<b>Seriplex®</b>	<b>3124A</b> CBL-1822-P20
			<b>3125A</b> CBL-1622-P16
			<b>3126A</b> CBL-162212-P16
<b>123124A</b> Aluminum Armor (3124A)			
<b>123125A</b> Aluminum Armor (3125A)			
<b>123126A</b> Aluminum Armor (3126A)			
<b>9463</b> Blue Hose® (Standard)			
<b>9463F</b> Flexible Version (9463)			
<b>129463</b> Aluminum Armor (9463)			
<b>139463</b> Steel Armor (9463)			
<b>189463</b> Continuous Armor (9463)			
<b>YR28826</b> Dual Version (9463)			
<b>9463DB</b> Direct Burial (9463)			
<b>YR29565</b> Various Color Jackets 9463)			
<b>SY/Net Network Trunk Cable</b>		<b>3072F</b> 600V TC Rated (9463)	
		<b>YR41194</b> Low-Smoke, Halogen-Free	
		<b>YR28764</b> Super Thick (PLTC)	
<b>SY/Net TNIM Cable</b>	<b>89463</b> FEP 200°C, Plenum		
	<b>9272</b> 20 AWG, 1-Pair, Shielded <b>89272</b> FEP 200°C, Plenum		

PLC/DCS Manufacturer	System Name	Belden Part Number
<b>Yokogawa — CENTUM</b>	<b>DeviceNet™</b>	See Protocol listings on page 8.6
	<b>FOUNDATION Fieldbus</b> (Type SP50 ISA/IEC)	See Protocol listings on page 8.6
	<b>HART</b>	See Protocol listings on page 8.6
	<b>Industrial Ethernet</b>	See Protocol listings on page 8.6
	<b>Profibus</b>	See Protocol listings on page 8.6
<b>Yokogawa — FA-M3</b>	<b>RS-485</b>	See Protocol listings on page 8.6
	<b>DeviceNet</b>	See Protocol listings on page 8.6
	<b>Industrial Ethernet</b>	See Protocol listings on page 8.6
	<b>Modbus</b>	See Protocol listings on page 8.6
	<b>Profibus</b>	See Protocol listings on page 8.6
<b>Yokogawa — STARDOM</b>	<b>RS-485</b>	See Protocol listings on page 8.6
	<b>DeviceNet</b>	See Protocol listings on page 8.6
	<b>FOUNDATION Fieldbus</b> (Type SP50 ISA/IEC)	See Protocol listings on page 8.6
	<b>HART</b>	See Protocol listings on page 8.6
	<b>Industrial Ethernet</b>	See Protocol listings on page 8.6
<b>Westinghouse</b>	<b>Profibus</b>	See Protocol listings on page 8.6
	<b>RS-485</b>	See Protocol listings on page 8.6
	<b>WDPF</b>	<b>9292</b> RG-11 PVC

FEP = Fluorinated Ethylene-propylene

ControlNet is a ControlNet International, Ltd. trademark.

DeviceNet is an Open DeviceNet Vendor Association, Inc. trademark.

EtherNet/IP is a ControlNet International, Ltd. trademark, under license by Open DeviceNet Vendor Association, Inc.

HART is a HART Communication Foundation trademark.

InterBus is a Phoenix Contact trademark.

Modbus is a Modicon, Inc. trademark.

PROFIBUS is a PROFIBUS International trademark.

PROFINET is a PROFIBUS International trademark.

SDS is a Honeywell International, Inc. trademark.

Seriplex is a Square D/Schneider AEG trademark.



## Industrial Communications Protocol Cross Reference

System Name	Belden Part Number
<b>Can Open/HART/ RS-485</b>	<b>3105A</b> 1-Pair, RS-485 (PLTC)
	<b>3106A</b> 1.5-Pair, RS-485 (PLTC)
	<b>3107A</b> 2-Pair, RS-485 (PLTC)
<b>CC-Link</b>	<b>YR47198</b> 20 AWG/3c, Foil + Braid Shield
	<b>YR47205</b> 20 AWG/3c Shielded + 18 AWG/2c Power
<b>ControlNet™</b>	<b>3092A</b> RG-6 PVC Quad Shield
	<b>3092F</b> RG-6 PVC Quad Shield, Flex Version, Aluminum Braid
	<b>YR28890</b> RG-6 PVC Quad Shield, Flex Version, Copper Braid
	<b>3093A</b> RG-6 FEP Quad Shield, Plenum
	<b>123092A</b> Aluminum Armor (3092A)
	<b>133092A</b> Steel Armor (3092A)
	<b>183092A</b> Continuous Armor (3092A)
<b>DataHighway (DH) &amp; DataHighway Plus (DH+) Remote I/O</b>	<b>9463</b> 20 AWG Twinax, Blue Hose
	<b>3072F</b> 600V, TC Blue Hose
	<b>9463DB</b> Direct Burial Blue Hose
	<b>9463F</b> High-Flex, Blue Hose
	<b>89463</b> High-Temp, Plenum Blue Hose
	<b>129463</b> Aluminum Armor (9463)
	<b>139463</b> Steel Armor (9463)
	<b>189463</b> Continuous Armor (9463)
	<b>YR28826</b> Dual Blue Hose
	<b>YC39151</b> Dual Armored Blue Hose
	<b>YR28764</b> Thick Wall PLTC Blue Hose
	<b>YR29565</b> Colored Blue Hose
<b>YR41104</b> Low-Smoke, Zero-Halogen Blue Hose	
<b>DeviceNet™</b>	<b>3082A</b> PVC (Thick)
	<b>3082F</b> High-Flex (Thick)
	<b>3082K</b> CL2 (Flat)
	<b>3082KP</b> Auxiliary Power (Flat)
	<b>3083A</b> CPE (Thick)
	<b>3084A</b> PVC (Thin)
	<b>3084F</b> High-Flex (Thin)
	<b>3085A</b> CPE (Thin)
	<b>7895A</b> CL2 PVC (Cable III Mid)
	<b>7896A</b> CL1 PVC (Type V Trunk Cable)
	<b>7897A</b> CL1 PVC (Thick)
	<b>7900A</b> CL1 Unshielded (Drop Cable IV)
	<b>FOUNDATION Fieldbus (Type SP50 ISA/IEC)</b>
<b>3077F</b> Type B, H1 1200m (31.25K)	
<b>HSE</b> Copper & Fiber (see <i>Cables for Industrial Ethernet</i> , pg. 18.6)	
<b>Hart/RS-485/ Can Open</b>	<b>3105A</b> 1-Pair, RS-485 (PLTC)
	<b>3106A</b> 1.5-Pair, RS-485 (PLTC)
	<b>3107A</b> 2-Pair, RS-485 (PLTC)
<b>Industrial Ethernet</b>	<b>7932A</b> Cat 5e, 2-Pair, Bonded
	<b>7933A</b> Cat 5e, 2-Pair, Bonded, Shielded
	<b>7918A</b> Cat 5e, 4-Pair
	<b>7924A</b> Cat 5e, 4-Pair, Bonded, Flexible
	<b>7930A</b> Cat 5e, 4-Pair, Flexible
	<b>7922A</b> Cat 5e, 4-Pair, Bonded, PLTC
	<b>7934A</b> Cat 5e, 4-Pair, Bonded, Burial

System Name	Belden Part Number	
<b>Industrial Ethernet (continued)</b>	<b>11700A</b> Cat 5e, 4-Pair, Bonded, Upjacketed	
	<b>11700A2</b> Cat 5e, 4-Pair, Bonded, Upjacketed, Oil Res II	
	<b>121700A</b> Cat 5e, 4-Pair, Bonded, Armored	
	<b>7919A</b> Cat 5e, 4-Pair, Shielded	
	<b>7921A</b> Cat 5e, 4-Pair, Bonded, Shielded (Foil + Braid)	
	<b>7927A</b> Cat 6, 4-Pair, Bonded	
	<b>7931A</b> Cat 6, 4-Pair, Bonded, Gas Res, High + Low Temperature	
	<b>11872A</b> Cat 6, 4-Pair, Bonded, Upjacketed	
	<b>121872A</b> Cat 6, 4-Pair, Bonded, Armored	
	<b>Interbus®-S</b>	<b>3119A</b> 18 AWG/3c, 24 AWG/3-Pair, Composite
		<b>3120A</b> 24 AWG/3-Pair
	<b>IronWorks®</b>	<b>8471</b> 16 AWG, 1-Pair, UL AWM 2598
		<b>8917</b> 16 AWG, 1-Cond, UL AWM 1015
<b>85102</b> 16 AWG, 2-Cond, VW1, Plenum		
<b>Modbus</b>	<b>8777</b> 22 AWG, 3-Pair, Modem Drop Cable	
	<b>128777</b> Aluminum Armor (8777)	
	<b>138777</b> Steel Armor (8777)	
	<b>88777</b> FEP 200°C, Plenum (8777)	
<b>Profibus DP &amp; FMS</b> (Purple)	<b>3079A</b> 22 AWG 300V Twinax	
	<b>3079E</b> 22 AWG 300V Twinax, Flex Version	
<b>Profibus PA</b> (Blue)	<b>3076F</b> 18 AWG, 2-Conductors, Type A	
<b>RS-485/HART/ Can Open</b>	<b>9841</b> 1-Pair	
	<b>82841</b> 1-Pair, Plenum	
	<b>89841</b> 1-Pair, Plenum, High-Temperature	
	<b>9842</b> 2-Pair	
	<b>82842</b> 2-Pair, Plenum	
	<b>9843</b> 3-Pair	
	<b>9844</b> 4-Pair	
	<b>7200A</b> 1-Pair, RS-485, Hi-Flex	
	<b>7201A</b> 2-Pair, RS-485, Hi-Flex	
	<b>7202A</b> 3-Pair, RS-485, Hi-Flex	
	<b>7203A</b> 4-Pair, RS-485, Hi-Flex	
	<b>7206A</b> 1-Pair, RS-485, Hi-Flex	
	<b>3105A</b> 1-Pair, RS-485 (PLTC)	
<b>3106A</b> 1.5-Pair, RS-485 (PLTC)		
<b>3107A</b> 2-Pair, RS-485 (PLTC)		
<b>3108A</b> 3 Pair, RS-485 (PLTC)		
<b>3109A</b> 4 Pair, RS-485 (PLTC)		
<b>Seriplex®</b>	<b>3124A</b> 1-Pair 18 AWG, 1-Pair 22 AWG	
	<b>3125A</b> 1-Pair 16 AWG, 1-Pair 22 AWG	
	<b>3126A</b> 1-Pair 16 AWG, 1-Pair 22 AWG, 1-Pair 12 AWG	
	<b>123124A</b> Aluminum Armor (3124A)	
	<b>123125A</b> Aluminum Armor (3125A)	
<b>123126A</b> Aluminum Armor (3126A)		
<b>Smart Distributed System (SDS)</b>	<b>3086A</b> 1-Pair 16 AWG, 1-Pair 20 AWG	
	<b>3087A</b> 2-Pairs 22 AWG	

FEP = Fluorinated Ethylene-propylene

# Industrial Data Solutions® — Industrial Ethernet

## DataTuff® Twisted Pair and TrayOptic® Fiber Optic Cables

### Overview

The reliability of your industrial Ethernet network depends on the cable infrastructure. Data transmission errors can lead to interruptions in critical control functions resulting in lost production time and even safety issues. Belden's family of industrial Ethernet cables is designed to withstand the rigors of industrial environments. Whether it's exposure to oil and sunlight, temperature variation, abrasion and crushing, or the presence of electromagnetic interference (EMI) or radio frequency interference (RFI), turn to Belden for the solution.

Belden offers an extensive line of high performance cables in both copper constructions with DataTuff cables as well as fiber optic designs with TrayOptic cables.

### Performance Assurance from Blue Hose® to Industrial Ethernet

To assist you in achieving optimum network performance, Belden has built

quality and reliability into each cable it manufactures. Decades of leadership and experience in supplying reliable high-end cable solutions, such as Blue Hose®, to industrial networks and control systems are combined to give you industrial Ethernet cables that perform to maximum network capability.

Our dedication to quality manufacturing practices and processes assures consistent products of uncompromising quality.

### Installable Performance® with Patented Bonded-Pair Technology

Belden's Bonded-Pair versions of DataTuff cables are unique in the industry to give you an Installable Performance advantage. This patented design yields superior electrical performance even after the effects and stresses of pulling, twisting and bending during typical installations.

This performance advantage is achieved by bonding the individual insulated conductors along their longitudinal axes, resulting in uniform conductor-to-conductor spacing and the elimination of gaps between conductors that can occur during installation. This is a critical construction feature because non-uniform conductor spacing and gaps change the physical characteristics of the cable such that the electrical performance of the cable suffers. Only Bonded-Pair cables deliver the electrical integrity you demand.

### TrayOptic Cables

Belden® TrayOptic cables are a line of indoor/outdoor fiber optic cables designed to meet the demanding requirements of industrial applications. When the installation demands the combination of sophisticated fiber optic technology and rugged durability, turn to Belden.

### DataTuff® Industrial Ethernet Cable Selection Guide

Part No.	No. of Pairs	Shielding		Conductor		Installation		Environmental Issues					Industrial Grade Jacket			
		Unshielded	Shielded *	Solid	Stranded **	Installation Stress Resistance†	Pull Tension	Oil Resistance	UV Sunlight Resistance	CMX/Outdoor	Underground (burial)	Gasoline Resistance	Hi/Lo Temp	Heavy	Upjacket	Armored
<b>Category 5e Cable</b>																
<b>new</b> 7932A <i>EtherNet/IP</i>	2	●		●		●	20	●	●							●
<b>new</b> 7933A <i>EtherNet/IP</i>	2		●	●		●	20	●	●							●
7923A <i>EtherNet/IP</i>	4	●		●		●	40	●	●	●						●
7918A	4	●		●			35	●	●	●						●
7924A	4	●			●	●	40	●	●	●						●
<b>new</b> 7930A	4	●			●		25	●	●	●						●
<b>new</b> 7922A PLTC	4	●		●		●	40	●	●	●						●
<b>new</b> 7934A <i>EtherNet/IP</i>	4	●		●		●	40		●		●					●
7928A <i>EtherNet/IP</i>	4	●		●		●	40	●	●		●	●	●			●
11700A <i>EtherNet/IP</i>	4	●		●		●	40	●	●	●						●
<b>new</b> 11700A2 Oil Res I&II	4	●		●		●	40	●	●							●
121700A	4	●		●		●	40	●	●							●
<b>new</b> 121700R	4	●		●		●	40	●	●							●
7929A	4		●	●		●	35	●	●	●						●
7919A	4		●	●		●	25	●	●	●						●
7921A <i>EtherNet/IP</i>	4		●	●		●	75	●	●	●						●
<b>Category 6 Cable</b>																
7927A	4	●		●		●	45	●	●							●
7931A	4	●		●		●	40	●	●		●	●	●			●
11872A	4	●		●		●	45									●
121872A	4	●		●		●	45	●	●							●







\*Shielded products are recommended for high-noise environments. \*\*Stranded products are recommended where more flexibility is needed.

†Products with Bonded-Pair technology provide Installable Performance® advantages — refer to Belden's Bonded-Pair Cable Bulletin #BP02

EtherNet/IP is a trademark of ControlNet International, Ltd. under license by Open DeviceNet Vendor Association, Inc.

# Industrial Data Solutions® — Industrial Ethernet

Category 5e DataTuff® Twisted Pair Cables, 2-Pair and 4-Pair Heavy-Duty Sunlight and Oil-Resistant Jackets

Description	Part No.	UL NEC/ C(UL) CEC Type	No. of Pairs	Standard Lengths		Standard Unit Wt.		Nominal OD		Freq. (MHz)	Max. Atten. (dB/100m)	Min. PSUM NEXT (dB)	Min. PSUM ACR (dB/100m)	Min. PSUM ELFEXT (dB/100m)	Input Imped. (Ω)	Min. RL (dB)
				Ft.	m	Lbs.	kg	Inch	mm							
<b>Enhanced Cat 5e • 24 AWG Bonded-Pairs</b> Solid BC Conductors • Rip Cord • See Color Codes below																
<b>Polyolefin Insulation • .030" Industrial Grade Sunlight- and Oil-resistant PVC Jacket (Black, Red or Teal)</b>																
<b>EtherNet/IP Compliant</b> 	<b>7932A</b> <small>(new)</small>	NEC: CMR CEC: CMR FT4	2	1000	304.8	19.0	8.61	.207	5.26	1	2.0	65.3	63.3	60.8	100±12	20.0
				2000	609.6	38.0	17.24	4	4.0		56.3	52.3	48.7	100±12	23.6	
				8	5.7	51.8	46.1	42.7	100±12		25.4					
				10	6.4	50.3	43.9	40.8	100±12		26.0					
				16	8.1	47.3	39.1	36.7	100±12		26.0					
				25	10.3	44.3	34.1	32.8	100±15		25.5					
				31.25	11.6	42.9	31.3	30.9	100±15		25.0					
				62.5	16.8	38.4	21.6	24.8	100±15		23.5					
				100	21.7	35.3	17.1	20.8	100±15		22.5					
				155	27.7	32.5	4.7	16.9	100±18		19.0					
200	32.0	30.8	3.0	14.7	100±20	19.0										
250	36.4	29.3	—	12.8	100±20	18.0										
350	44.3	27.2	—	9.9	100±22	17.0										
*2000 ft. put-up available in Black only. • M-12 or RJ-45 Compatible • Jacket sequentially marked at 2 ft. intervals Cable passes -40°C Cold Bend per UL1581 • Installation Temperature: -25°C to +75°C • Operating Temperature: -40°C to +75°C** Third party verified to TIA/EIA-568-B.2, Category 5e • U.S. Patents 5,606,151 and 5,734,126																
<b>EtherNet/IP Compliant</b> 	<b>7923A</b>	NEC: CMR, CMX- Outdoor CEC: CMR FT4	4	1000	304.8	28.0	12.7	.230	5.84	1	2.0	65.3	63.3	60.8	100±12	20.0
				2000	609.6	54.0	24.5	4	4.0		56.3	52.3	48.7	100±12	23.6	
				8	5.7	51.8	46.1	42.7	100±12		25.4					
				10	6.4	50.3	43.9	40.8	100±12		26.0					
				16	8.1	47.3	39.1	36.7	100±12		26.0					
				25	10.3	44.3	34.1	32.8	100±15		25.5					
				31.25	11.6	42.9	31.3	30.9	100±15		25.0					
				62.5	16.8	38.4	21.6	24.8	100±15		23.5					
				100	21.7	35.3	17.1	20.8	100±15		22.5					
				155	27.7	32.5	4.7	16.9	100±18		19.0					
200	32.0	30.8	3.0	14.7	100±20	19.0										
250	36.4	29.3	—	12.8	100±20	18.0										
350	44.3	27.2	—	9.9	100±22	17.0										
*2000 ft. put-up available in Black only. • RJ-45 Compatible • Jacket sequentially marked at 2 ft. intervals Cable passes -40°C Cold Bend per UL1581 • Installation Temperature: -25°C to +75°C • Operating Temperature: -40°C to +75°C** Third party verified to TIA/EIA-568-B.2, Category 5e • U.S. Patents 5,606,151 and 5,734,126 • P-07-KA060003-MSHA*																
<b>Polyolefin Insulation • Waterblocked Sunlight- and Oil-resistant Black Polyethylene Jacket</b>																
<b>EtherNet/IP Compliant</b> <b>Halogen-Free Burial</b> 	<b>7934A</b> <small>(new)</small>	—	4	1000	304.8	25.0	11.34	.230	5.84	1	2.0	62.3	60.0	60.8	100±15	20.0
				4	4.1	53.3	49.0	48.7	100±15		23.6					
				8	5.8	48.8	43.0	42.7	100±15		25.4					
				10	6.5	47.3	41.0	40.8	100±15		26.0					
				16	8.2	44.3	36.0	36.7	100±15		26.0					
				20	9.3	42.8	33.5	34.7	100±15		26.0					
				25	10.4	41.3	30.9	32.8	100±15		25.5					
				31.25	11.7	39.9	28.0	30.9	100±15		25.0					
				62.5	17.0	35.4	19.0	24.8	100±15		23.5					
				100	22.0	32.3	11.0	20.8	100±15		22.5					
155	28.1	29.5	1.4	16.9	100±25	15.8										
200	32.0	27.8	1.0	14.7	100±25	15.0										
RJ-45 Compatible • Jacket sequentially marked at 3 ft. intervals Cable passes -40°C Cold Bend per UL1581 • Installation Temperature: -25°C to +75°C • Operating Temperature: -40°C to +75°C** Third party verified to TIA/EIA-568-B.2, Category 5e • U.S. Patents 5,606,151 and 5,734,126 • Waterblocked per Telcordia, IEC and ICEA																
<b>Plenum • FEP Insulation • Sunlight-, Oil- and Gas-resistant Black FEP Jacket</b>																
<b>EtherNet/IP Compliant</b> <b>High &amp; Low Temp</b> <b>Oil Res I &amp; II</b> <b>Gas Res</b> 	<b>7928A</b>	NEC: Limited Combustible FHC 25/50 CMP CEC: CMP FT6	4	1000	304.8	24.0	10.9	.187	4.75	1	2.0	65.3	63.3	60.8	100±12	20.0
				4	4.0	56.3	52.3	48.7	100±12		23.6					
				8	5.7	51.8	46.1	42.7	100±12		25.4					
				10	6.4	50.3	43.9	40.8	100±12		26.0					
				16	8.1	47.3	39.1	36.7	100±12		26.0					
				25	10.3	44.3	34.1	32.8	100±15		25.5					
				31.25	11.6	42.9	31.3	30.9	100±15		25.0					
				62.5	16.8	38.4	21.6	24.8	100±15		23.5					
				100	21.7	35.3	17.1	20.8	100±15		22.5					
				155	27.7	32.5	4.7	16.9	100±18		19.0					
200	32.0	30.8	3.0	14.7	100±20	19.0										
250	36.4	29.3	—	12.8	100±20	18.0										
350	44.3	27.2	—	9.9	100±22	17.0										
RJ-45 Compatible Cable passes -70°C Cold Bend per UL1581 • Installation Temperature: -55°C to +150°C • Operating Temperature: -70°C to +150°C** Jacket sequentially marked at 2 ft. intervals • Third party verified to TIA/EIA-568-B.2, Category 5e • U.S. Patents 5,606,151 and 5,734,126																
<b>Polyolefin Insulation • PVC Inner Jacket • .035" Industrial Grade PVC Outer Jacket (Black, Gray, Red, Teal or Blue)</b>																
<b>EtherNet/IP Compliant</b> <b>Upjacketed</b> 	<b>11700A</b>	NEC: CMR, CMX- Outdoor CEC: CMR FT4	4	1000	304.8	39.0	17.7	.285	7.24	1	2.0	65.3	63.3	60.8	100±12	20.0
				3000	914.4	117.0	53.2	4	4.0		56.3	52.3	48.7	100±12	23.6	
				8	5.7	51.8	46.1	42.7	100±12		25.4					
				10	6.4	50.3	43.9	40.8	100±12		26.0					
				16	8.1	47.3	39.1	36.7	100±12		26.0					
				25	10.3	44.3	34.1	32.8	100±15		25.5					
				31.25	11.6	42.9	31.3	30.9	100±15		25.0					
				62.5	16.8	38.4	21.6	24.8	100±15		23.5					
				100	21.7	35.3	17.1	20.8	100±15		22.5					
				155	27.7	32.5	4.7	16.9	100±18		19.0					
200	32.0	30.8	3.0	14.7	100±20	19.0										
250	36.4	29.3	—	12.8	100±20	18.0										
350	44.3	27.2	—	9.9	100±22	17.0										
†3000 ft. put-up available in Black only. • Outer jacket is sunlight- and oil-resistant. • Jacket sequentially marked at 2 ft. intervals Cable passes -40°C Cold Bend per UL1581 • Installation Temperature: -25°C to +75°C • Operating Temperature: -40°C to +75°C** RJ-45 Compatible • Third party verified to TIA/EIA-568-B.2, Category 5e • U.S. Patents 5,606,151 and 5,734,126 • P-07-KA060005-MSHA*																
<b>Oil Res I &amp; II</b> <b>Upjacketed</b> 	<b>11700A2</b> <small>(new)</small>	NEC: CMR CEC: CMR FT4	4	1000 ††	304.8	42.0	19.1	.285	7.24	1	2.0	65.3	63.3	60.8	100±12	20.0
				2000 ††	609.6	86.0	39.1	4	4.0		56.3	52.3	48.7	100±12	23.0	
				8	5.7	51.8	46.1	42.7	100±12		24.5					
				10	6.4	50.3	43.9	40.8	100±12		25.0					
				16	8.1	47.3	39.1	36.7	100±12		25.0					
				25	10.3	44.3	34.1	32.8	100±15		24.3					
				31.25	11.6	42.9	31.3	30.9	100±15		23.6					
				62.5	16.8	38.4	21.6	24.8	100±15		21.5					
				100	21.7	35.3	17.1	20.8	100±15		20.1					
				155	27.7	32.5	4.7	16.9	100±18		19.0					
200	32.0	30.8	3.0	14.7	100±20	19.0										
250	36.4	29.3	—	12.8	100±20	18.0										
350	44.3	27.2	—	9.9	100±22	17.0										
††1000 ft. put-up available in Black or Blue only, 2000 ft. put-up in Black only. • RJ-45 Compatible • Outer jacket is sunlight resistant. Cable passes -10°C Cold Bend per UL1581 • Installation Temperature: +5°C to +75°C • Operating Temperature: -10°C to +75°C** Jacket sequentially marked at 2 ft. intervals • Third party verified to TIA/EIA-568-B.2, Category 5e • U.S. Patents 5,606,151 and 5,734,126																

ACR = Attenuation Crosstalk Ratio • BC = Bare Copper • ELFEXT = Equal Level Far-end Crosstalk • NEXT = Near-end Crosstalk • PSUM = Power Sum • RL = Return Loss • TC = Tinned Copper  
\*Pennsylvania Department of Environmental Resources and United States Mine Safety and Health Administration Certification. EtherNet/IP is a trademark of ControlNet International, Ltd. under license by Open DeviceNet Vendor Association, Inc.  
\*\*Subject to length de-rating.

**DataTuff Color Codes:** Pair 1 = White/Blue Stripe & Blue, Pair 2 = White/Orange Stripe & Orange, Pair 3 = White/Green Stripe & Green, Pair 4 = White/Brown Stripe & Brown  
For two pair products: use color codes for Pairs 2 & 3




For more information, contact Belden Technical Support: 1-800-BELDEN-1 • www.belden.com




# Industrial Data Solutions® — Industrial Ethernet


Category 5e DataTuff® Twisted Pair Cables, 2-Pair and 4-Pair Heavy-Duty Sunlight and Oil-Resistant Jackets

Description	Part No.	UL NEC/ C(UL) CEC Type	No. of Pairs	Standard Lengths		Standard Unit Wt.		Nominal OD		Freq. (MHz)	Max. Atten. (dB/100m)	Min. PSUM NEXT (dB)	Min. PSUM ACR (dB/100m)	Min. PSUM ELFEXT (dB/100m)	Input Imped. (Ω)	Min. RL (dB)
				Ft.	m	Lbs.	kg	Inch	mm							
<b>Enhanced Cat 5e • 22 AWG Bonded-Pairs Solid Bare Copper Conductors • Rip Cord • See Color Code Chart (below)</b>																
<b>Polyolefin Insulation • .030" Industrial Grade Sunlight- and Oil-resistant Black PVC Jacket</b>																
 <p>Rip Cord</p>	7922A <i>new</i>	NEC: PLTC, CMR, CMX- Outdoor CEC: CMR FT4	4	1000	304.8	46.3	21.0	.301	7.65	1	2.0	65.3	63.3	60.8	100±12	20.0
				2000	609.6	92.5	42.0	4	4.0	56.3	52.3	48.7	100±12	23.0		
								8	5.7	51.8	46.1	42.7	100±12	24.5		
								10	6.4	50.3	43.9	40.8	100±12	25.0		
								16	8.1	47.3	39.1	36.7	100±12	25.0		
								25	10.3	44.3	34.1	32.8	100±15	24.3		
								31.25	11.6	42.9	31.3	30.9	100±15	23.6		
								62.5	16.8	38.4	21.6	24.8	100±15	21.5		
								100	21.7	35.3	17.1	20.8	100±15	20.1		
								155	27.7	32.5	4.7	16.9	100±18	19.0		
				200	32.0	30.8	3.0	14.7	100±20	19.0						
				250	36.4	29.3	—	12.8	100±20	18.0						
				350	44.3	27.2	—	9.9	100±22	17.0						


Cable passes -25°C Cold Bend per UL1581 • Installation Temperature: -10°C to +75°C • Operating Temperature: -25°C to +75°C\*\*  
Jacket sequentially marked at 2 ft. intervals • Third party verified to TIA/EIA-568-B.2, Category 5e • U.S. Patents 5,606,151 and 5,734,126

<b>Enhanced Cat 5e • 24 AWG Bonded-Pairs Stranded (7x32) TC Conductors • See Color Code Chart (below)</b>																
<b>Polyolefin Insulation • .030" Industrial Grade Sunlight- and Oil-resistant PVC Jacket (Black, Red or Teal)</b>																
	7924A	NEC: CMR, CMX- Outdoor CEC: CMR FT4	4	1000	304.8	30.0	13.6	.242	6.15	1	2.4	65.3	62.9	60.8	100±12	20.0
				2000 †	609.6	58.0	26.3	4	4.8	56.3	51.5	48.7	100±12	23.6		
								8	6.8	51.8	45.0	42.7	100±12	25.4		
								10	7.7	50.3	42.6	40.8	100±12	26.0		
								16	9.7	47.3	37.5	36.7	100±12	26.0		
								25	12.4	44.3	31.9	32.8	100±15	25.5		
								31.25	13.9	42.9	29.0	30.9	100±15	25.0		
								62.5	20.2	38.4	18.3	24.8	100±15	23.5		
								100	26.0	35.3	9.2	20.8	100±18	22.5		
								155	33.2	32.5	—	16.9	100±18	19.0		
				200	38.4	30.8	—	14.7	100±20	19.0						
				250	43.7	29.3	—	12.8	100±20	18.0						
				350	53.2	27.2	—	9.9	100±22	17.0						


†2000 ft. put-up available in Black only. • RJ-45 Compatible • Jacket sequentially marked at 2 ft. intervals  
Cable passes -40°C Cold Bend per UL1581 • Installation Temperature: -25°C to +75°C • Operating Temperature: -40°C to +75°C\*\*  
Third party verified to TIA/EIA-568-B.2, Category 5e • U.S. Patents 5,606,151; 5,734,126 and 5,763,823

<b>Enhanced Cat 5e • 24 AWG Bonded-Pairs Solid BC Conductors • Overall Beldfoil® Shield (100%) • Drain Wire • See Color Codes (below)</b>																
<b>Polyolefin Insulation • .030" Industrial Grade Sunlight- and Oil-resistant PVC Jacket (Black, Red or Teal)</b>																
 <p>Drain Wire</p>	7933A <i>new</i>	NEC: CMR, CMX- Outdoor CEC: CMR FT4	2	1000	304.8	32.0	14.5	.227	5.77	1	2.0	62.3	60.3	60.8	100±15	20.0
				2000 ▲	609.6	64.8	29.4	4	4.1	53.3	49.2	48.7	100±15	23.6		
								10	6.5	47.3	40.8	40.8	100±15	26.0		
								16	8.2	44.3	36.1	36.7	100±15	26.0		
								31.25	11.7	39.9	28.2	30.9	100±15	25.0		
								62.5	17.0	35.4	18.4	24.8	100±15	23.5		
								100	22.0	32.3	10.3	20.8	100±15	22.5		
								200	32.4	27.8	1.0	14.7	100±25	15.0		

\*2000 ft. put-up available in Black only. • M-12 or RJ-45 Compatible • Shield is bonded to jacket inner wall for electrical stability.  
Cable passes -40°C Cold Bend per UL1581 • Installation Temperature: -25°C to +75°C • Operating Temperature: -40°C to +75°C\*\*  
Jacket sequentially marked at 2 ft. intervals • Third party verified to TIA/EIA-568-B.2, Category 5e • U.S. Patents 5,606,151 and 5,734,126

<b>Enhanced Cat 5e • 24 AWG Bonded-Pairs Solid BC Conductors • Overall Beldfoil (100%) + TC Braid Shield (70% Coverage) • Drain Wire*</b>																
<b>Polyolefin Insulation • .030" Industrial Grade Sunlight- and Oil-resistant PVC Jacket (Black or Blue)</b>																
 <p>Drain Wire</p>	7929A	NEC: CMR, CMX- Outdoor CEC: CMR FT4	4	1000	304.8	37.0	16.8	.265	6.73	1	2.0	62.3	60.3	60.8	100±15	20.0
				2000 ▲	609.6	72.0	32.7	4	4.1	53.3	49.2	48.7	100±15	23.0		
								10	6.5	47.3	40.8	40.8	100±15	25.0		
								16	8.2	44.3	36.1	36.7	100±15	25.0		
								31.25	11.7	39.9	28.2	30.9	100±15	23.6		
								62.5	17.0	35.4	18.4	24.8	100±15	21.5		
								100	22.0	32.3	10.3	20.8	100±15	20.1		
								200	32.4	27.8	1.0	14.7	100±25	15.0		

\*2000 ft. put-up available in Black only. • RJ-45 Compatible • Shield is bonded to jacket inner wall for electrical stability.  
Cable passes -40°C Cold Bend per UL1581 • Installation Temperature: -25°C to +75°C • Operating Temperature: -40°C to +75°C\*\*  
Jacket sequentially marked at 2 ft. intervals • Third party verified to TIA/EIA-568-B.2, Category 5e • U.S. Patents 5,606,151 and 5,734,126 • P-07-KA060003-MSHA\*

<b>Enhanced Cat 5e • 24 AWG Bonded-Pairs Solid BC Conductors • Overall Beldfoil (100%) + TC Braid Shield (70% Coverage) • Drain Wire*</b>																
<b>Polyolefin Insulation • .030" Industrial Grade Sunlight- and Oil-resistant PVC Jacket (Black, Red, Blue or Teal)</b>																
 <p>Drain Wire</p>	7921A	NEC: CMR, CMX- Outdoor CEC: CMR FT4	4	1000	304.8	55.0	24.9	.330	8.38	1	2.0	62.3	60.3	60.8	100±15	20.0
				2000 ▲	609.6	106.0	48.1	4	4.1	53.3	49.2	48.7	100±15	23.6		
								10	6.5	47.3	40.8	40.8	100±15	26.0		
								16	8.2	44.3	36.1	36.7	100±15	26.0		
								31.25	11.7	39.9	28.2	30.9	100±15	25.0		
								62.5	17.0	35.4	18.4	24.8	100±15	23.5		
								100	22.0	32.3	10.3	20.8	100±15	22.5		

\*2000 ft. put-up available in Black only. \*24 AWG solid spiral drain wire.  
Cable passes -40°C Cold Bend per UL1581 • Installation Temperature: -25°C to +75°C • Operating Temperature: -40°C to +75°C\*\*  
Jacket sequentially marked at 2 ft. intervals • Third party verified to TIA/EIA-568-B.2, Category 5e • NEMA WC-63.1 Category 5e • U.S. Patents 5,606,151 and 5,734,126

ACR = Attenuation Crosstalk Ratio • AL = Aluminum • BC = Bare Copper • ELFEXT = Equal Level Far-end Crosstalk • NEXT = Near-end Crosstalk • PSUM = Power Sum • RL = Return Loss • TC = Tinned Copper  
EtherNet/IP is a trademark of ControlNet International, Ltd. under license by Open DeviceNet Vendor Association, Inc.  
\*Pennsylvania Department of Environmental Resources and United States Mine Safety and Health Administration Certification.  
\*\*Subject to length de-rating.

**DataTuff Color Codes:** Pair 1 = White/Blue Stripe & Blue, Pair 2 = White/Orange Stripe & Orange, Pair 3 = White/Green Stripe & Green, Pair 4 = White/Brown Stripe & Brown  
For two pair products: use color codes for Pairs 2 & 3



For more information, contact Belden Technical Support: 1-800-BELDEN-1 • www.belden.com

# Industrial Data Solutions® — Industrial Ethernet


Category 5e DataTuff® Twisted Pair Cables, 4-Pair Heavy-Duty Sunlight and Oil-Resistant Jackets

Description	Part No.	UL NEC/ C(UL) CEC Type	No. of Pairs	Standard Lengths		Standard Unit Wt.		Nominal OD		Freq. (MHz)	Max. Atten. (dB/100m)	Min. PSUM NEXT (dB)	Min. PSUM ACR (dB/100m)	Min. PSUM ELFEXT (dB/100m)	Input Imped. (Ω)	Min. RL (dB)
				Ft.	m	Lbs.	kg	Inch	mm							

**Enhanced Cat 5e • 24 AWG Bonded-Pairs** Solid BC Conductors • Polyester Wrap • Rip Cord • See Color Code Chart (below)

**AL Interlocked Armor • Polyolefin Insulation • PVC Inner Jacket • .045" Industrial Grade PVC Outer Jacket (Black or Gray)**

Interlocked AL Armor	121700A	NEC: CM CEC: HL CMG FT4	4	Standard Lengths		Standard Unit Wt.		Nominal OD		Freq. (MHz)	Max. Atten. (dB/100m)	Min. PSUM NEXT (dB)	Min. PSUM ACR (dB/100m)	Min. PSUM ELFEXT (dB/100m)	Input Imped. (Ω)	Min. RL (dB)
				3000 †	914.4	459.0	72.0	210.6	.530							
										1	2.0	65.3	63.3	60.8	100±12	20.0
										4	4.0	56.3	52.3	48.7	100±12	23.0
										8	5.7	51.8	46.1	42.7	100±12	24.5
										10	6.4	50.3	43.9	40.8	100±12	25.0
										16	8.1	47.3	39.1	36.7	100±12	25.0
										25	10.3	44.3	34.1	32.8	100±15	24.3
										31.25	11.6	42.9	31.3	30.9	100±15	23.6
										62.5	16.8	38.4	21.6	24.8	100±15	21.5
										100	21.7	35.3	17.1	20.8	100±15	20.1
										155	27.7	32.5	4.7	16.9	100±18	19.0
										200	32.0	30.8	3.0	14.7	100±20	19.0
										250	36.4	29.3	—	12.8	100±20	18.0
										350	44.3	27.2	—	9.9	100±22	17.0




†3000 ft. put-up available in Black only. • RJ-45 Compatible • Outer jacket is sunlight- and oil-resistant.

Cable passes -40°C Cold Bend per UL1581 • Installation Temperature: -25°C to +75°C • Operating Temperature: -40°C to +75°C\*\*

Jacket sequentially marked at 1 meter intervals • Third party verified to TIA/EIA-568-B.2, Category 5e • U.S. Patents 5,606,151 and 5,734,126

**AL Interlocked Armor • Polyolefin Insulation • PVC Inner Jacket • .045" Industrial Grade PVC Outer Jacket (Black or Blue)**

Interlocked AL Armor -40°C Cold Impact	121700R (NEW)	NEC: CM CEC: HL CMG FT4	4	Standard Lengths		Standard Unit Wt.		Nominal OD		Freq. (MHz)	Max. Atten. (dB/100m)	Min. PSUM NEXT (dB)	Min. PSUM ACR (dB/100m)	Min. PSUM ELFEXT (dB/100m)	Input Imped. (Ω)	Min. RL (dB)
				3000 †	914.4	459.0	72.0	210.6	.530							
										1	2.0	62.3	60.3	60.8	100±15	20.0
										4	4.1	53.3	49.2	48.7	100±15	23.0
										10	6.5	47.3	40.8	40.8	100±15	25.0
										16	8.2	44.3	36.1	36.7	100±15	25.0
										31.25	11.7	39.9	28.2	30.9	100±15	23.6
										62.5	17.0	35.4	18.4	24.8	100±15	21.5
										100	22.0	32.3	10.3	20.8	100±15	20.1
										200	32.4	27.8	1.0	14.7	100±25	15.0




†5000 ft. put-up available in Blue only. • RJ-45 Compatible • Installation Temperature: -25°C to +75°C • Operating Temperature: -40°C to +75°C\*\*

Outer jacket is sunlight- and oil-resistant. • Jacket sequentially marked at 1 meter intervals • Third party verified to TIA/EIA-568-B.2, Category 5e • U.S. Patents 5,606,151 and 5,734,126

**Cat 5e • 24 AWG Solid Bare Copper Conductors • Twisted Pairs • Rip Cord • See Color Code Chart (below)**

**Polyolefin Insulation • .030" Industrial Grade Sunlight- and Oil-resistant PVC Jacket (Black or Blue)**

7918A	NEC: CMR, CMX-Outdoor CEC: CMR FT4	4	Standard Lengths		Standard Unit Wt.		Nominal OD		Freq. (MHz)	Max. Atten. (dB/100m)	Min. PSUM NEXT (dB)	Min. PSUM ACR (dB/100m)	Min. PSUM ELFEXT (dB/100m)	Input Imped. (Ω)	Min. RL (dB)	
			2000 ††	609.6	52.0	23.6	.230	5.84								
										1	2.0	62.3	60.3	60.8	100±15	20.0
										4	4.1	53.3	49.2	48.7	100±15	23.0
										10	6.5	47.3	40.8	40.8	100±15	25.0
										16	8.2	44.3	36.1	36.7	100±15	25.0
										31.25	11.7	39.9	28.2	30.9	100±15	23.6
										62.5	17.0	35.4	18.4	24.8	100±15	21.5
										100	22.0	32.3	10.3	20.8	100±15	20.1
										200	32.4	27.8	1.0	14.7	100±25	15.0




††2000 ft. put-up available in Black only. • RJ-45 Compatible • Jacket sequentially marked at 2 ft. intervals

Cable passes -40°C Cold Bend per UL1581 • Installation Temperature: -25°C to +75°C • Operating Temperature: -40°C to +75°C\*\* • Third party verified to TIA/EIA-568-B.2, Category 5e

**Cat 5e • 24 AWG Solid BC • Twisted Pairs • Overall Beldfoil® Shield (100% Coverage) • 24 AWG Stranded TC Drain Wire • See Color Code Chart**

**Polyolefin Insulation • .030" Industrial Grade Sunlight- and Oil-resistant PVC Jacket (Black or Blue)**

Shielded	7919A	NEC: CMR, CMX-Outdoor CEC: CMR FT4	4	Standard Lengths		Standard Unit Wt.		Nominal OD		Freq. (MHz)	Max. Atten. (dB/100m)	Min. PSUM NEXT (dB)	Min. PSUM ACR (dB/100m)	Min. PSUM ELFEXT (dB/100m)	Input Imped. (Ω)	Min. RL (dB)
				2000 †	609.6	68.0	30.9	.265	6.73							
										1	2.0	62.3	60.3	60.8	100±15	20.0
										4	4.1	53.3	49.2	48.7	100±15	23.0
										10	6.5	47.3	40.8	40.8	100±15	25.0
										16	8.2	44.3	36.1	36.7	100±15	25.0
										31.25	11.7	39.9	28.2	30.9	100±15	23.6
										62.5	17.0	35.4	18.4	24.8	100±15	21.5
										100	22.0	32.3	10.3	20.8	100±15	20.1




†2000 ft. put-up available in Black only. • RJ-45 Compatible • Installation Temperature: -25°C to +75°C • Operating Temperature: -40°C to +75°C\*\* • Cable passes -40°C Cold Bend per UL1581

Shield is bonded to jacket inner wall for electrical stability. • Jacket sequentially marked at 2 ft. intervals • Third party verified to TIA/EIA-568-B.2, Category 5e • P-07-KA060004-MSHA\*

**Cat 5e • 24 AWG Stranded (7x32) Bare Copper Conductors • Twisted Pairs • See Color Code Chart (below)**

**Polyolefin Insulation • .030" Industrial Grade Sunlight- and Oil-resistant Black PVC Jacket**

Stranded/Flexible	7930A (NEW)	NEC: CMR, CMX-Outdoor CEC: CMR FT4	4	Standard Lengths		Standard Unit Wt.		Nominal OD		Freq. (MHz)	Max. Atten. (dB/100m)	Min. PSUM NEXT (dB)	Min. PSUM ACR (dB/100m)	Min. PSUM ELFEXT (dB/100m)	Input Imped. (Ω)	Min. RL (dB)
				2000	609.6	56.0	25.4	.240	6.09							
										1	2.5	62.3	59.8	60.8	100±15	20.0
										4	4.9	53.3	48.4	48.7	100±15	23.0
										10	7.8	47.3	39.5	40.8	100±15	25.0
										16	9.9	44.3	34.4	36.7	100±15	25.0
										31.25	14.1	39.9	25.8	30.9	100±15	23.6
										62.5	20.4	35.4	15.0	24.8	100±15	21.5
										100	26.4	32.3	5.9	20.8	100±15	20.1
										200	38.9	27.8	—	14.7	100±25	15.0



Installation Temperature: 0°C to +75°C • Operating Temperature: -25°C to +75°C\*\* • Cable passes -25°C Cold Bend per UL1581

RJ-45 Compatible • Jacket sequentially marked at 2 ft. intervals • Third party verified to TIA/EIA-568-B.2, Category 5e • P-07-KA060003-MSHA\*

ACR = Attenuation Crosstalk Ratio • BC = Bare Copper • ELFEXT = Equal Level Far-end Crosstalk • FEP = Fluorinated Ethylene-propylene •

NEXT = Near-end Crosstalk • PSUM = Power Sum • RL = Return Loss • TC = Tinned Copper

EtherNet/IP is a trademark of ControlNet International, Ltd. under license by Open DeviceNet Vendor Association, Inc.

\*Pennsylvania Department of Environmental Resources and United States Mine Safety and Health Administration Certification.

\*\*Subject to length de-rating.

**Color Codes: DataTuff**

Pair No.	Color Combination
1	White/Blue Stripe & Blue
2	White/Orange Stripe & Orange
3	White/Green Stripe & Green
4	White/Brown Stripe & Brown


For two pair products: use color codes for Pairs 2 & 3



# Industrial Data Solutions® — Industrial Ethernet


## Category 6 DataTuff® Twisted Pair Cables, 4-Pair

### Heavy-Duty Jackets

Description	Part No.	UL NEC/ C(UL) CEC Type	No. of Pairs	Standard Lengths		Standard Unit Wt.		Nominal OD		Freq. (MHz)	Max. Atten. (dB/100m)	Min. PSUM NEXT (dB)	Min. PSUM ACR (dB/100m)	Min. PSUM ELFEXT (dB/100m)	Input Imped. (Ω)	Min. RL (dB)			
				Ft.	m	Lbs.	kg	Inch	mm										
<b>Enhanced Cat 6 • 23 AWG Bonded-Pairs</b> Solid BC Conductors • Patented E-Spline Center Member • Rip Cord • See Color Code Chart																			
<b>Polyolefin Insulation • .030" Industrial Grade Sunlight- and Oil-resistant Black PVC Jacket</b>																			
	7927A	NEC: 4 CMR CEC: CMR FT4	4	1000	304.8	44.0	20.0	.251	6.38	1	1.9	80.3	78.5	70.8	100±12	20.0			
				2000	609.6	88.0	39.9	x	x	10	5.7	65.3	59.6	50.8	100±12	25.0			
													31.25	10.2	57.9	47.7	40.9	100±15	25.0
													62.5	14.7	53.4	38.7	34.9	100±15	25.0
													100	18.9	50.3	31.4	30.8	100±15	25.0
													155	23.9	47.5	23.5	27.0	100±15	22.8
													200	27.5	45.8	18.3	24.8	100±15	21.7
													250	31.2	44.3	13.2	22.8	100±20	20.5
													350	37.7	40.2	4.5	19.9	100±22	19.8
													400	40.6	39.3	0.6	18.8	100±22	19.5
													500	46.2	37.8	>0.0*	16.8	100±22	18.4
									550	48.8	37.2	—	16.0	100±22	18.0				
									600	51.4	36.6	—	15.2	100±22	17.6				


RJ-45 Compatible • Jacket sequentially marked at 2 ft. intervals • Third party verified to TIA/EIA-568-B.2-1, Category 6  
 Cable passes -40°C Cold Bend per UL1581 • Installation Temperature: -25°C to +75°C • Operating Temperature: -40°C to +75°C\*\*  
 \*PSUM ACR >0 is guaranteed to 460 MHz. • U.S. Patents 5,606,151; 5,734,126; 5,789,711 and 6,297,454-B1

### Cat 6 • 23 AWG Bonded-Pairs Solid BC Conductors • See Color Code Chart (below)

Description	Part No.	UL NEC/ C(UL) CEC Type	No. of Pairs	Standard Lengths		Standard Unit Wt.		Nominal OD		Freq. (MHz)	Max. Atten. (dB/100m)	Min. PSUM NEXT (dB)	Min. PSUM ACR (dB/100m)	Min. PSUM ELFEXT (dB/100m)	Input Imped. (Ω)	Min. RL (dB)				
				Ft.	m	Lbs.	kg	Inch	mm											
<b>Plenum • FEP Insulation • Sunlight-, Oil- and Gas-resistant Black FEP Jacket</b>																				
	7931A	NEC: 4 Limited Combustible FHC 25/50 CMP CEC: CMP FT6	4	1000	304.8	35.0	15.9	.214	5.44	1	2.0	72.3	70.3	64.8	100±15	20.0				


RJ-45 Compatible  
 Cable passes -70°C Cold Bend per UL1581 • Installation Temperature: -55°C to +150°C • Operating Temperature: -70°C to +150°C\*\*  
 Jacket sequentially marked at 2 ft. intervals • Third party verified to TIA/EIA-568-B.2-1, Category 6 • U.S. Patents 5,606,151 and 5,734,126

### Enhanced Cat 6 • 23 AWG Bonded-Pairs Solid BC Conductors • Rip Cord • See Color Code Chart (below)

Description	Part No.	UL NEC/ C(UL) CEC Type	No. of Pairs	Standard Lengths		Standard Unit Wt.		Nominal OD		Freq. (MHz)	Max. Atten. (dB/100m)	Min. PSUM NEXT (dB)	Min. PSUM ACR (dB/100m)	Min. PSUM ELFEXT (dB/100m)	Input Imped. (Ω)	Min. RL (dB)				
				Ft.	m	Lbs.	kg	Inch	mm											
<b>Polyolefin Insulation • PVC Inner Jacket • .035" Industrial Grade PVC Outer Jacket (Black or Gray)</b>																				
	11872A	NEC: 4 CM CEC: CM FT1	4	1000	304.8	66.0	30.0	.475	12.07	1	1.9	72.3	70	64.8	100±12	20.0				

†Value provided for information only. • RJ-45 Compatible • Cable passes -25°C Cold Bend per UL1581  
 Installation Temperature: -10°C to +75°C • Operating Temperature: -25°C to +75°C\*\*  
 Jacket sequentially marked at 2 ft. intervals • Verified to TIA/EIA-568-B.2-1, Category 6 • U.S. Patents 5,606,151, 5,734,126 and 5,821,467

### Enhanced Cat 6 • 23 AWG Bonded-Pairs Solid BC Conductors • Polyester Wrap • Rip Cord • See Color Code Chart (below)

Description	Part No.	UL NEC/ C(UL) CEC Type	No. of Pairs	Standard Lengths		Standard Unit Wt.		Nominal OD		Freq. (MHz)	Max. Atten. (dB/100m)	Min. PSUM NEXT (dB)	Min. PSUM ACR (dB/100m)	Min. PSUM ELFEXT (dB/100m)	Input Imped. (Ω)	Min. RL (dB)				
				Ft.	m	Lbs.	kg	Inch	mm											
<b>AL Interlocked Armor • Polyolefin Insulation • PVC Inner Jacket • .055" Industrial Grade PVC Outer Jacket (Black or Gray)</b>																				
	121872A	NEC: 4 CM CEC: HL CMG FT4	4	1000	304.8	222.0	100.6	.684	17.37	1	1.9	72.3	70	64.8	100±12	20.0				

†Value provided for information only. • RJ-45 Compatible • Jacket sequentially marked at 1 meter intervals  
 Cable passes -40°C Cold Bend per UL1581 • Installation Temperature: -25°C to +75°C • Operating Temperature: -40°C to +75°C\*\*  
 Verified to TIA/EIA-568-B.2-1, Category 6 • U.S. Patents 5,606,151, 5,734,126 and 5,821,467

ACR = Attenuation Crosstalk Ratio • AL = Aluminum • BC = Bare Copper • ELFEXT = Equal Level Far-end Crosstalk • NEXT = Near-end Crosstalk • PSUM = Power Sum • RL = Return Loss • TC = Tinned Copper  
 \*\*Subject to length de-rating.

#### Color Codes: DataTuff

Pair No.	Color Combination
1	White/Blue Stripe & Blue
2	White/Orange Stripe & Orange
3	White/Green Stripe & Green
4	White/Brown Stripe & Brown

# Industrial Data Solutions® — Industrial Ethernet

## TrayOptic® Heavy-Duty, All-Dielectric Fiber Optic Cables

### Loose Tube — Indoor/Outdoor Riser & Tray

#### Applications

- Industrial and other harsh environment applications
- Factory automation
- Direct burial

#### Product Description

Laser Optimized Fiber to handle Gigabit Ethernet light sources and expanded bandwidth requirements. Passes IEEE 383-2003 flame test. Waterblocking agent for moisture protection. CPE outer jacket option provides extra chemical or abrasion resistance.

Jacket Material	PVC or CPE
Strength Member	Aramid Yarn
Jacket Color	Orange


#### Ratings

Riser	
UL Type	OFNR
cUL Type	OFN FT4
Flame Resistance	IEEE 383-2003

#### Specifications

<b>Temperature Range</b>	
Storage	-40 to +70°C
Operating	-40 to +70°C
<b>Crush Resistance (EIA-455-41)</b>	500 lbs./in. min.
<b>Impact Resistance (EIA-455-25)</b>	3.3 ft.-lbs./25 impacts min. @ 2.2N-m
<b>Cyclic Flexing (EIA-455-104)</b>	25 cycles, 12 lbs., 20 x OD radius min.
<b>Min. Bend Radius</b>	
Installation	20 x OD
Long Term	15 x OD
<b>Maximum Installation Load</b>	600 lbs. (2700 N)
<b>Optical Specifications</b>	See page 10.2

#### Fiber Bundle Detail

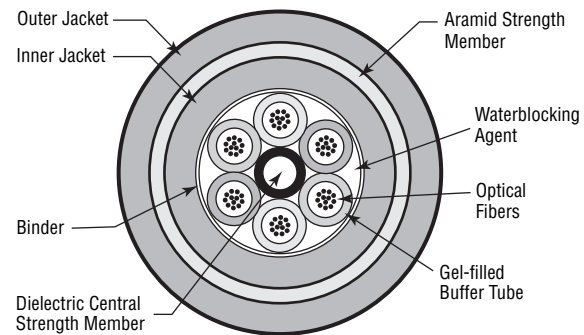

No. of Fibers	Fibers Per Tube	Outside Diameter		PVC Jacket			CPE Jacket		
		Inches	mm	Belden Part No.	Weight Lbs./1000'	Weight kg/km	Belden Part No.	Weight Lbs./1000'	Weight kg/km

#### TrayOptic Series

Riser (NEC/CEC OFNR/OFN FT4)									
2	2	0.440	11.18	I100255	88	131	I100266	83	124
4	4	0.440	11.18	I100455	88	131	I100466	83	124
6	6	0.440	11.18	I100655	88	131	I100666	83	124
8	4	0.440	11.18	I400855	88	131	I400866	83	124
12	6	0.440	11.18	I601255	88	131	I601266	83	124
18	6	0.440	11.18	I601855	88	131	I601866	83	124
24	6	0.440	11.18	I602455	88	131	I602466	83	124
36	6	0.440	11.18	I603655	88	131	I603666	83	124
48	12	0.540	13.72	I604855	136	202	I604866	129	192
60	12	0.540	13.72	I606055	136	202	I606066	129	192
72	12	0.540	13.72	I607255	136	202	I607266	129	192

All optical fiber products can be supplied in compliance with RoHS regulations. Please contact Customer Service for more details.


# Industrial Data Solutions® — Industrial Ethernet

## Coaxial Cables

Description	Part No.	UL NEC/ C(UL) CEC Type	Standard Lengths		Standard Unit Weight		Conductor (stranding) Diameter Nom. DCR	Nominal Core OD		Shielding Materials Nom. DCR	Nominal OD		Nom. Imp. (Ω)	Nom. Vel. of Prop.	Nominal Capacitance		Nominal Attenuation		
			Ft.	m	Lbs.	kg		Inch	mm		Inch	mm			pF/Ft.	pF/m	MHz	dB/100 Ft.	dB/100m

**Thinnet 10Base2 Ethernet • 20 AWG Stranded (19x32) .037" TC Conductor • Duobond® II (100% Coverage) + TC Braid (93% Coverage)**


**Foam Polyethylene Insulation • Gray PVC Jacket**

	UL AWM	<b>9907</b>	NEC:	500	152.4	12.5	5.7	20 AWG	.102	2.59	Duobond II	.185	4.70	50	80%	25.4	83.3	1	.43	1.4
	Style 1354		CL2	U-1000	U-304.8	25.0	11.4	(19x32)			+ 93%							10	1.30	4.3
	(30V 60°C)		CM	1000	304.8	25.0	11.4	.037"			TC Braid							50	2.90	9.5
			CEC:	1640	500.0	41.0	18.6	TC			5.8Ω/M'							100	4.20	13.8
			CM	U-2500	U-762.0	60.0	27.3	8.8Ω/M'			19.0Ω/km							200	6.10	20.0
				2500	762.0	62.5	28.4	28.9Ω/km										400	8.90	29.2
			3280	1000.0	82.0	37.3											700	12.10	39.7	
																	900	13.90	45.6	
																	1000	14.80	48.6	

DEC Part No. 17-01248-00

For Plenum versions of 9907, see 89907 or 82907.

**Plenum • Foam FEP Insulation • Gray Fluorocopolymer Jacket**

	150°C	<b>89907</b>	NEC:	500	152.4	13.0	5.7	20 AWG	.095	2.41	Duobond II	.160	4.06	50	80%	25.4	83.3	1	.43	1.4	
			CL2P	1000	304.8	24.0	10.9	(19x32)			+ 93%								10	1.30	4.3
			CMP	2500†	762.0	60.0	27.3	.037"			TC Braid								50	2.90	9.5
			CEC:					TC			5.8Ω/M'								100	4.18	13.8
			CMP FT6					8.8Ω/M'			19.0Ω/km								200	6.10	20.0
								28.9Ω/km											400	9.20	30.2
																		700	12.90	42.3	
																		900	15.00	49.2	
																		1000	16.00	52.5	


RG-58/U Type

DEC Part No. 17-01246-00

Suitable for Outdoor and Direct Burial applications.

**Thicknet 10Base5 Ethernet • 12 AWG Solid .086" Bare Copper Conductor • Duobond IV\* Quad Shield (100% Coverage)**

**Foam Polyethylene Insulation • Yellow PVC Jacket**


	UL AWM	<b>9880</b>	NEC:	500	152.4	66.0	30.0	12 AWG	.243	6.17	Duobond IV	.405	10.29	50	78%	26.0	85.0	1	.19	.62	
	Style 1478		CL2	1000	304.8	131.0	59.5	(solid)			(Duobond II								5	.37	1.21
	(30V 60°C)		CM	1640	500.0	219.0	99.9	.086"			+ 94% TC Braid								10	.52	1.71
			CEC:					BC			+ Duofoil®								50	1.20	3.94
			CM					1.4Ω/M'			+ 90% TC								100	1.70	5.58
								4.7Ω/km			Braid)								200	2.55	8.37
										1.5Ω/M'								400	3.90	12.80	
										5.0Ω/km								700	5.50	18.10	
																		900	6.50	21.30	
																		1000	6.90	22.60	

DEC Part No. 17-00451-00

Ring-band stripes marked every 2.5 meters to aid users in tap placement.

For Plenum version of 9880, see 89880.

**Plenum • Foam FEP Insulation • Orange Fluorocopolymer Jacket**

	150°C	<b>89880</b>	NEC:	1000	304.8	134.0	60.9	12 AWG	.245	6.22	Duobond IV	.375	9.53	50	78%	26.0	85.0	1	.18	.59	
			CL2P	1640†	500.0	224.7	102.1	(solid)			(Duobond II								5	.37	max. 1.21
			CMP					.086"			+ 90% TC Braid								10	.52	max. 1.71
			CEC:					BC			+ Duofoil								50	1.15	3.77
			CMP FT6					1.4Ω/M'			+ 90% TC								100	1.65	5.41
								4.7Ω/km			Braid)								200	2.45	8.04
										1.5Ω/M'								400	3.80	12.50	
										5.0Ω/km								700	5.60	18.40	
																		900	6.80	22.30	
																		1000	7.20	23.60	

DEC Part No. 17-00324-00

Ring-band stripes marked every 2.5 meters to aid users in tap placement.

Suitable for Outdoor and Direct Burial applications.

BC = Bare Copper • DCR = DC Resistance • FEP = Fluorinated Ethylene-propylene • TC = Tinned Copper

Contact the Belden Customer Service Department for a Comprehensive Connector Cross Reference. **1-800-BELDEN-1**.

\*Duobond IV = Duobond II + 94% tinned copper braid + Duofoil® + 90% tinned copper braid.

(Plenum version is Duobond II + 90% tinned copper braid + Duofoil + 90% tinned copper braid.)

† Spools and/or UnReel® cartons are one piece, but length may vary ±10% from length shown.



## Industrial Data Solutions® — Industrial Twinax

### Belden® Blue Hose® Selection Guide for PLC and DCS Applications

Part No.	Description	Specifications
9463	<b>Blue Hose Standard Data Highway Cable</b> A Standard Data Highway Cable that is sometimes referred to as Blue Hose. Designed to be used in light industrial environments. Available in Blue, Brown or Orange up to 10,000 ft. special lengths.	1-pair, 20 AWG stranded (7x28) tinned copper, polyethylene insulation (color coded Blue, Clear), Beldfoil® + 55% tinned copper braid and drain wire, Blue sunlight-resistant PVC jacket. Nominal diameter: .238".
3072F	<b>600V Data Highway Cable — UL Type TC</b> A DataTray® cable designed for cable tray use in industrial applications. Cable can occupy same tray or conduit as 600V power cables.	1-pair, 18 AWG stranded (7x26) tinned copper, flame-retardant polyolefin insulation (color coded Blue, White), Beldfoil + 55% tinned copper braid and drain wire, Blue sunlight-resistant PVC jacket. Nominal diameter: .324". UL-1277 600V TC/PLTC/ITC/CMG.
9463F	<b>High-Flex Cable</b> A highly flexible version of the standard Blue Hose cable. The cable also has heavier braid coverage for better noise immunity.	1-pair, 20 AWG stranded (42x36) tinned copper, polyethylene insulation (color coded Blue, Clear), Beldfoil + 85% tinned copper braid, Blue sunlight-resistant PVC jacket. Nominal diameter: .243".
YR28826*	<b>Dual Blue Hose Cable</b> Dual Data Highway/Remote I/O cable has two Twinax pairs individually shielded with an overall braid. Designed for use in daisy chain applications or applications requiring two Blue Hose cables.	2-pair, 20 AWG stranded (7x28) tinned copper, polyethylene insulation (color coded Blue, Clear), each pair Beldfoil shielded (1 pair Blue tape and 1 pair Green tape), 85% tinned copper braid and drain wire, Blue PVC jacket. Nominal diameter: .382".
YC39151*	<b>Dual Armored Data Highway Cable</b> Features two twinax pairs individually shielded with an overall braid, an inner PVC jacket, aluminum interlocked armor, with an outer PVC jacket. Designed for use in daisy chain applications or applications requiring two Blue Hose cables, with the extra mechanical protection and electrical shielding provided by the armor.	2-pair, 20 AWG stranded (7x28) tinned copper, polyethylene insulation (color coded Blue, Clear), each pair Beldfoil shielded, 55% tinned copper braid and drain wire, Blue PVC inner jacket, aluminum interlocked armor, Blue sunlight-resistant PVC outer jacket. Nominal diameter: .820".
9463DB	<b>Gel-Filled Direct Burial Cable</b> A gel-filled Blue Hose cable featuring a low-density polyethylene (LDPE) jacket. Especially suited for high-moisture environments and burial applications.	1-pair, 20 AWG stranded (7x28) tinned copper, polyethylene insulation (color coded Blue, Clear), Beldfoil + 55% tinned copper braid and drain wire, CoreGuard® flooding compound, Blue sunlight-resistant low density polyethylene jacket. Nominal diameter: .240".
89463	<b>Plenum Cable</b> A plenum, 200°C grade cable that is suitable for installations where high and low temperatures, as well as corrosive environments, are encountered.	1-pair, 20 AWG stranded (7x28) tinned copper, FEP insulation (color coded Blue, Clear), Beldfoil + 76% tinned copper braid and drain wire, Blue FEP jacket. Nominal diameter: .203".
YR28764*	<b>Thick-Wall, Heavy-Duty Cable — UL Type PLTC</b> A rugged, heavy-duty cable specially designed for abusive environments. A .069" thick jacket provides extra protection against cuts and abrasion.	1-pair, 20 AWG stranded (7x28) tinned copper, polyethylene insulation (color coded Blue, Clear), Beldfoil + 55% tinned copper braid and drain wire, Blue sunlight-resistant PVC jacket. Nominal diameter: .380".
YR41104*	<b>Low Smoke, Zero Halogen Cable</b> For applications concerned with smoke emissions, toxicity and electronic component corrosion.	1-pair, 20 AWG stranded (7x28) tinned copper, polyethylene insulation (color coded Blue, Clear), Beldfoil + 55% tinned copper braid and drain wire, Blue Haloarrest® jacket. Nominal diameter: .256".
129463	<b>Aluminum Interlocked Armor Blue Hose Cable</b> Features interlocked aluminum armor combined with a PVC jacket and is an ideal alternative to conduit installation. Provides both mechanical protection and electrical shielding. Up to 25 Data Highway cables can be bundled under one sheath.	1-pair, 20 AWG stranded (7x28) tinned copper, polyethylene insulation (color coded Blue, Clear), Beldfoil + 55% tinned copper braid and drain wire, Blue PVC inner jacket, aluminum interlocked armor, Blue PVC sunlight-resistant outer jacket. Nominal overall diameter: .563".
139463	<b>Steel Interlocked Armor Blue Hose Cable</b> Features interlocked galvanized steel armor combined with a PVC jacket. Provides mechanical protection and electrical shielding, as well as prevention against the low-frequency 60 Hz magnetic noise from power lines. Up to 25 cables can be bundled under one sheath.	1-pair, 20 AWG stranded (7x28) tinned copper, polyethylene insulation (color coded Blue, Clear), Beldfoil + 55% tinned copper braid and drain wire, Blue PVC inner jacket, steel interlocked armor, Blue sunlight-resistant outer PVC jacket. Nominal overall diameter: .563".
189463	<b>Continuously Corrugated Aluminum Armor Blue Hose Cable</b> Features continuously corrugated aluminum armor combined with a PVC jacket. Provides mechanical protection, electrical shielding and is impervious to moisture.	1-pair, 20 AWG stranded (7x28) tinned copper, polyethylene insulation (color coded Blue, Clear), Beldfoil + 55% tinned copper braid and drain wire, Blue PVC inner jacket, continuously corrugated aluminum armor, Blue sunlight-resistant PVC outer jacket. Nominal overall diameter: .500".
YR29565*	<b>Colored Blue Hose</b> When your application calls for multiple Blue Hose cables you can rest assured that Belden has the solution. This special construction is available in Red, Yellow, Green, White or Pink.	1-pair, 20 AWG stranded (7x28) tinned copper, polyethylene insulation (color coded Blue, Clear), Beldfoil + 55% tinned copper braid and drain wire, sunlight-resistant PVC jacket. Nominal diameter: .238".

\*Custom made product. Minimum order quantity may apply.

# Industrial Data Solutions® — Industrial Twinax


## Blue Hose® Cables

Description	Part No.	UL NEC/ C(UL) CEC Type	Standard Lengths		Standard Unit Weight		Conductor (stranding) Diameter Nom. DCR	Nominal Core OD		Shielding Materials Nom. DCR	Nominal OD		Nom. Imp. (Ω)	Nom. Vel. of Prop.	Nominal Capacitance		Nominal Attenuation		
			Ft.	m	Lbs.	kg		Inch	mm		Inch	mm			pF/Ft.	pF/m	MHz	dB/100 Ft.	dB/100m

**78 Ohm • 20 AWG** Stranded (7x28) .038" TC Conductors • Beldfoil® (100% Coverage) + TC Braid Shield (55% Coverage) • TC Drain Wire

**Polyethylene Insulation • Blue Sunlight-resistant PVC Jacket** (Color Code: Clear, Blue)

<b>Blue Hose</b>	<b>9463</b>	NEC:	100	30.5	4.2	1.9	20 AWG	.154	3.91	Beldfoil	.238	6.05	78	66%	19.7	64.6	1	.6	2.0
UL AWM		CM CL2	U-500	U-152.4	18.5	8.4	(7x28)			+55%							10	2.1	6.9
Style 2464		CEC:	500	152.4	18.5	8.4	.038"			TC Braid							50	5.0	16.4
(300V 80°C)		CM	U-1000	U-304.8	37.0	16.8	Tinned			4.1Ω/M'							100	7.5	24.6
			1000 <sup>▲</sup>	304.8	37.0	16.8	Copper			13.4Ω/km							200	11.0	36.1
			6000 <sup>▲†</sup>	1828.8	222.0	100.9	9.5Ω/M'										400	16.0	52.5
			10000 <sup>▲†</sup>	3048.0	370.0	168.0	31.0Ω/km												



CPE jacket optional.

Allen-Bradley P/N 1770-CD • P-7K-SC-182141-MSHA\*


<sup>▲</sup>1000 ft. and 6000 ft. put-ups also available in Brown, Orange or Purple.

<sup>†</sup>10000 ft. put-up available in Brown or Orange only.

<sup>†</sup>Final put-up length may vary ±10% from length shown.

**Polyethylene Insulation • Blue Sunlight-resistant LDPE Jacket** (Color Code: Clear, Blue)

<b>Flooded Direct Burial Blue Hose</b>	<b>9463DB</b>	—	1000	304.8	33.0	15.0	20 AWG	.154	3.91	Beldfoil	.240	6.10	78	66%	19.7	64.6	1	.6	2.0
300V 80°C			5000	1524.0	155.0	70.4	(7x28)			+55%							10	2.1	6.9
							.038"			TC Braid							50	5.0	16.4
							Tinned			4.1Ω/M'							100	7.5	24.6
							Copper			13.4Ω/km							200	11.0	36.1
							9.5Ω/M'										400	16.0	52.5
							31.0Ω/km												



Allen-Bradley P/N 1770-CD

**78 Ohm • 20 AWG** Stranded (42x36) .038" TC Conductors • Overall Beldfoil (100% Coverage) + TC Braid Shield (85% Coverage)

**Polyethylene Insulation • Blue Sunlight-resistant PVC Jacket** (Color Code: Clear, Blue)

<b>High-Flex Blue Hose</b>	<b>9463F</b>	NEC:	1000	304.8	42.0	19.1	20 AWG	.154	3.91	Beldfoil	.243	6.17	78	66%	19.7	64.6	1	.6	2.0
300V 60°C		CM CL2	5000	1524.0	205.0	93.1	(42x36)			+85%							10	2.1	6.9
		CEC:					.038"			TC Braid							50	5.0	16.4
		CM					Tinned			5.0Ω/M'							100	7.5	24.6
							Copper			6.4Ω/km							200	11.0	36.1
							9.5Ω/M'										400	16.0	52.5
							31.0Ω/km												




Allen-Bradley P/N 1770-CD • P-7K-SC-182141-MSHA\*

**78 Ohm • 20 AWG** Stranded (7x28) .038" TC Conductors • Overall Beldfoil (100% Coverage) + TC Braid Shield (76% Coverage) • Drain Wire

**Plenum • FEP Insulation • Blue FEP Jacket** (Color Code: Clear, Blue)

<b>High Temperature Blue Hose</b>	<b>89463</b>	NEC:	1000	304.8	34.0	15.4	20 AWG	.151	3.83	Beldfoil	.203	5.16	78	69%	19.7	64.6	1	.6	2.0
300V 200°C		CMP CL2P	2500	762.0	90.0	40.9	(7x28)			+76%							10	2.1	6.9
		CEC:					.038"			TC Braid							50	5.0	16.4
		CMP FT6					Tinned			4.1Ω/M'							100	7.5	24.6
							Copper			13.4Ω/km							200	11.0	36.1
							9.5Ω/M'										400	16.0	52.5
							31.0Ω/km												



Allen-Bradley P/N 1770-CD

DCR = DC Resistance • FEP = Fluorinated Ethylene-propylene • LDPE = Low-density Polyethylene • TC = Tinned Copper

\*Pennsylvania Department of Environmental Resources and United States Mine Safety and Health Administration Certification.


# Industrial Data Solutions® — Industrial Twinax

## Blue Hose® and Other Twinaxial Cables

Description	Part No.	UL NEC/ C(UL) CEC Type	Standard Lengths		Standard Unit Weight		Conductor (stranding) Diameter Nom. DCR	Nominal Core OD		Shielding Materials Nom. DCR	Nominal OD		Nom. Imp. (Ω)	Nom. Vel. of Prop.	Nominal Capacitance		Nominal Attenuation		
			Ft.	m	Lbs.	kg		Inch	mm		Inch	mm			pF/Ft.	pF/m	MHz	dB/100 Ft.	dB/100m


**78 Ohm • 20 AWG** Stranded (7x28) TC Conductors • Overall Beldfoil® (100% Coverage) + TC Braid Shield (55% Coverage) • TC Drain Wire

**Aluminum Interlocked Armor • PE Insulation • Blue Sunlight-resistant PVC Outer Jacket\*** (Color Code: Clear, Blue)

<b>Aluminum Armored Blue Hose</b> 300V 60°C  Drain Wire	<b>129463</b> NEC: CM CL2 CEC: CM, CMG FT4, HLBCD (Haz Loc)	1000†	304.8	122.0	55.5	20 AWG (7x28)	.154	3.91	Beldfoil +55%	Inner Jacket: .238	78	66%	19.7	64.6	1	.6	2.0
		6000†	1828.8	924.0	420.0	.038"	Tinned	4.1Ω/M'	Overall: .563	14.30	10	2.1	6.9				
						Copper	13.4Ω/km			50	5.0	16.4					
						9.5Ω/M'				100	7.5	24.6					
						31.0Ω/km				200	11.0	36.1					
										400	16.0	52.5					


\*Blue PVC inner jacket.  
Allen-Bradley P/N 1770-CD

**Steel Interlocked Armor • PE Insulation • Blue Sunlight-resistant PVC Outer Jacket\*** (Color Code: Clear, Blue)

<b>Steel Armored Blue Hose</b> 300V 60°C  Drain Wire	<b>139463</b> NEC: CM CL2 CEC: CM, CMG FT4, HLBCD (haz loc)	1000†	304.8	220.0	100.0	20 AWG (7x28)	.154	3.91	Beldfoil +55%	Inner Jacket: .238	78	66%	19.7	64.6	1	.6	2.0
		6000†	1828.8	1488.0	676.4	.038"	Tinned	4.1Ω/M'	Overall: .563	14.30	10	2.1	6.9				
						Copper	13.4Ω/km			50	5.0	16.4					
						9.5Ω/M'				100	7.5	24.6					
						31.0Ω/km				200	11.0	36.1					
										400	16.0	52.5					

\*Blue PVC inner jacket.  
Allen-Bradley P/N 1770-CD


**Continuously Corrugated AL Armor • PE Insulation • Blue Sunlight-resistant PVC Outer Jacket\*** (Color Code: Clear, Blue)

<b>Continuously Armored Blue Hose</b> 300V 60°C  Drain Wire	<b>189463</b> NEC: PLTC	2000†	609.6	258.0	117.1	20 AWG (7x28)	.154	3.91	Beldfoil +55%	Inner Jacket: .238	78	66%	19.7	64.6	1	.6	2.0
						.038"	Tinned	4.1Ω/M'	Overall: .500	12.70	10	2.1	6.9				
						Copper	13.4Ω/km			50	5.0	16.4					
						9.5Ω/M'				100	7.5	24.6					
						31.0Ω/km				200	11.0	36.1					
										400	16.0	52.5					

\*Blue PVC inner jacket.  
Allen-Bradley P/N 1770-CD

**78 Ohm • 20 AWG** Stranded (7x28) .038" Tinned Copper Conductors • Tinned Copper Braid Shield (93% Coverage)

**Polyethylene Insulation • Blue PVC Jacket** (Color Code: Clear, Blue)

<b>UL AWM Style 2092 (300V 60°C)</b>  Drain Wire	<b>9272</b> NEC: CM CEC: CM, U-1000	100	30.5	4.5	2.0	20 AWG (7x28)	.156	3.96	93% TC Braid Shield	.244	6.20	78	66%	19.7	64.6	1	.6	2.0
		U-500	U-152.4	20.5	9.3	.038"	Tinned	3.4Ω/M'	11.2Ω/km	10	2.1	6.9						
		U-1000	U-304.8	41.0	18.6		Copper			50	5.0	16.4						
		1000	304.8	40.0	18.2	9.5Ω/M'				100	7.5	24.6						
						31.0Ω/km				200	11.0	36.1						
										400	16.0	52.5						

For Plenum version of 9272, see 89272.  
CPE jacket optional.

**95 Ohm • RG-22B/U Type • 18 AWG** Stranded (7x26) Bare Copper Conductors†† • TC Double Braid Shield (95% Coverage)

**Polyethylene Insulation • PE Inner Jacket • Black Non-contaminating PVC Outer Jacket**

<b>80°C VW-1</b>  Drain Wire	<b>9250</b> —	500	152.4	61.5	27.9	18 AWG (7x26)	.285	7.24	2 TC Braid Shield	.416	10.57	95	66%	16.0	52.5	1	.3	1.0
		1000	304.8	121.0	54.9	.046"	BC	6.6Ω/M'	21.5Ω/km	10	.9	3.0						
										20	1.3	4.3						
										50	2.1	6.9						
										100	3.0	9.8						
										400	6.3	20.7						

CPE jacket optional.

††One conductor has tinned center strand.

AL = Aluminum • BC = Bare Copper • DCR = DC Resistance • PE = Polyethylene • TC = Tinned Copper

\*Final put-up length may vary ±10% from length shown.

# Industrial Data Solutions® — Industrial Twinax

## Twinaxial Cables

Description	Part No.	UL NEC/ C(UL) CEC Type	Standard Lengths		Standard Unit Weight		Conductor (stranding) Diameter Nom. DCR	Nominal Core OD		Shielding Materials Nom. DCR	Nominal OD		Nom. Imp. (Ω)	Nom. Vel. of Prop.	Nominal Capacitance		Nominal Attenuation		
			Ft.	m	Lbs.	kg		Inch	mm		Inch	mm			pF/Ft.	pF/m	MHz	dB/100 Ft.	dB/100m

**100 Ohm • 20 AWG** Stranded (7x28) .037" One TC, One BC Conductor • Duofoil® (100% Coverage) + TC Braid Shield (86% Coverage)

**Polyethylene Insulation • Polyethylene Inner Jacket • Black PVC Outer Jacket**

75°C	<b>9207</b>	NEC:	100	30.5	7.1	3.2	20 AWG	.236	5.99	Duofoil	.330	8.38	100	66%	14.5	47.6	1	.3	1.0
		CMG CL2	U-500	U-152.4	34.0	15.5	(7x28)			+ 86%							10	1.2	3.9
		CEC:	500	152.4	34.5	15.7	.037"			TC Braid							50	2.8	9.2
		CMG FT4	1000	304.8	68.0	30.9	1 TC			2.5Ω/M'							100	4.1	13.5
			1640	500.0	111.5	50.7	1 BC			8.2Ω/km							200	6.4	21.0
			2000	609.6	136.0	61.8	9.5Ω/M'										400	10.2	33.5
			3280	1000.0	219.8	99.9	31.0Ω/km												
			5000	1524.0	350.0	159.1													

IBM P/N 7362211

For Plenum version of 9207, see 89207.  
CPE jacket optional.

**124 Ohm • 25 AWG** Stranded (7x33) .021" Tinned Copper Conductors • Beldfoil® (100% Coverage) • Stranded Tinned Copper Drain Wire


**Polyethylene Insulation • Blue PVC Jacket (Color Code: Clear, Blue)**

UL AWM	<b>9271</b>	NEC:	100	30.5	3.2	1.5	25 AWG	.170	4.32	100%	.240	6.10	124	66%	12.2	40.0	1	.6	2.0
Style 2092		CM	500	152.4	14.0	6.4	(7x33)			Beldfoil							10	1.7	5.6
(300V 60°C)		CEC:	U-1000	U-304.8	27.0	12.3	.021"			Shield							50	3.6	11.8
		CM	1000	304.8	28.0	12.7	Tinned			12.0Ω/M'							100	5.0	16.4
							Copper			39.4Ω/km							200	6.9	22.6
Shorting Fold							31.8Ω/M'										400	9.6	31.5
							104.3Ω/km												

CPE jacket optional.

**124 Ohm • 16 AWG** Solid .051" Bare Copper Conductors • Duofoil (100% Coverage) + Tinned Copper Braid Shield (90% Coverage)

**Foam Polyethylene Insulation • Black PVC Jacket (Color Code: Clear, Blue)**

UL AWM	<b>9860</b>	NEC:	500	152.4	52.0	23.6	16 AWG	.322	8.18	Duofoil	.440	11.18	124	78%	10.9	35.8	1	.2	.6
Style 2448		CMX	1000	304.8	103.0	46.8	(solid)			+90%							10	.7	2.3
(30V 60°C)		CEC:	2000	609.6	202.0	91.8	.051"			TC Braid							50	1.8	5.9
		CMX					Bare			1.3Ω/M'							100	2.9	9.5
							Copper			4.3Ω/km							200	4.1	13.5
							4.2Ω/M'										400	6.2	20.3
							13.8Ω/km												

CPE jacket optional.

**150 Ohm • 22 AWG** Stranded (19x34) .031" Tinned Copper Conductors • Duofoil (100% Coverage) • Stranded Tinned Copper Drain Wire

**Datalene® Insulation • Black PVC Jacket (Color Code: Black, Yellow)**

UL AWM	<b>9182</b>	NEC:	U-500	U-152.4	22.5	10.2	22 AWG	.275	6.98	100%	.345	8.76	150	78%	8.8	28.9	1	.4	1.3
Style 2668		CL2X CMX	500	152.4	23.0	10.4	(19x34)			Duofoil							10	1.2	3.9
(30V 60°C)		CEC:	1000	304.8	44.0	20.0	.031"			Shield							50	2.7	8.9
VW-1		CMX					Tinned			6.3Ω/M'							100	4.3	14.1
							Copper			20.7Ω/km							200	6.2	20.3
							14.0Ω/M'										400	8.8	28.9
							45.9Ω/km												

For Plenum version of 9182, see 89182.  
Dual version: YR41609  
CPE jacket optional.

**Plenum • Foam FEP Teflon® Insulation • Black FEP Teflon Jacket (Color Code: Black, Yellow)**

	<b>89182</b>	NEC:	100	30.5	6.4	2.9	22 AWG	.278	7.06	100%	.307	7.80	150	78%	8.8	28.9	1	.4	1.3
		CMP	500†	152.4	28.0	12.7	(19x34)			Duofoil							10	1.2	3.9
		CL2P	1000†	304.8	53.0	24.1	.031"			Shield							50	2.7	8.9
		CEC:					Tinned			6.3Ω/M'							100	4.3	14.1
		CMP FT6					Copper			20.7Ω/km							200	6.2	20.3
							14.0Ω/M'										400	8.8	28.9
							45.9Ω/km												




BC = Bare Copper • DCR = DC Resistance • FEP = Fluorinated Ethylene-propylene • TC = Tinned Copper

†Spools are one piece, but length may vary ±10% from length shown.

Teflon is a DuPont trademark.

# Industrial Data Solutions® — Industrial Twinax

## DataTray® 600V Twinaxial Cables

Description	Part No.	UL NEC/ C(UL) CEC Type	Standard Lengths		Standard Unit Weight		Conductor (stranding) Diameter Nom. DCR	Nominal Core OD		Shielding Materials Nom. DCR	Nominal OD		Nom. Imp. (Ω)	Nom. Vel. of Prop.	Nominal Capacitance		Nominal Attenuation			
			Ft.	m	Lbs.	kg		Inch	mm		Inch	mm			pF/Ft.	pF/m	MHz	dB/ 100 Ft.	dB/ 100m	
<b>18 AWG Stranded (7x26) Tinned Copper Conductors • Overall Beldfoil® (100% Coverage) + TC Braid Shield (55% Coverage) • TC Drain Wire</b> <b>Flame-retardant Polyolefin Insulation • Blue Sunlight-resistant PVC Jacket (Color Code: Natural, Blue)</b>																				
<b>UL Type TC</b> 600V 75°C   Z-Fold®  Drain Wire	<b>3072F</b>	NEC:	250	76.2	17.5	8.0	18 AWG (7x26)	.192	4.88	Beldfoil +55%	.324	8.23	78	65%	19.5	64	1	.5	1.7	
		CMG, ITC	500	152.4	35.0	15.9												10	2.0	6.5
		TC, PLTC	1000	304.8	69.0	31.3	.046"				TC Braid (100% Shield)							50	3.8	12.4
		CEC:	2500	762.0	170.0	77.2		Tinned Copper										100	5.4	17.6
		CMG FT4	5000†	1524.0	345.0	156.6		6.9Ω/M'			3.2Ω/M'							200	7.6	24.8
			10000†	3048.0	710.0	322.3			22.7Ω/km								400	10.7	35.1	
											For CPE jacketed version order Part No. YM45044.									
P-MSHA-C-7K-1827*																				
<b>UL Type TC</b> 600V 75°C   Z-Fold®  Drain Wire	<b>3073F</b>	NEC:	250	76.2	21.0	9.5	18 AWG (7x26)	.246	6.25	Beldfoil +55%	.388	9.86	100	65%	15.3	50.2	1	.4	1.3	
		CMG, ITC	1000	304.8	85.0	38.6												10	1.3	4.4
		TC, PLTC	5000†	1524.0	420.0	190.7	.046"				TC Braid (100% Shield)							50	3.0	9.7
		CEC:						Tinned Copper										100	4.2	13.8
		CMG FT4						6.9Ω/M'			2.9Ω/M'							200	6.0	19.5
							22.7Ω/km			9.6Ω/km							400	7.5	24.7	
											CPE jacket optional.									
P-MSHA-C-7K-1827*																				
<b>UL Type TC</b> 600V 75°C   Z-Fold®  Drain Wire	<b>3074F</b>	NEC:	500	152.4	62.5	28.4	18 AWG (7x26)	.328	8.33	Beldfoil +55%	.460	11.68	124	65%	12.3	40.3	1	.3	1.1	
		CMG, ITC	1000	304.8	121.0	54.9												10	1.1	3.5
		TC, PLTC	2500	762.0	300.0	136.2	.046"				TC Braid (100% Shield)							50	2.4	7.8
		CEC:						Tinned Copper										100	3.4	11.1
		CMG FT4						6.9Ω/M'			2.8Ω/M'							200	4.8	15.7
							22.7Ω/km			9.1Ω/km							400	6.8	22.2	
											CPE jacket optional.									

DCR = DC Resistance • TC = Tinned Copper if conductor, or Tray Cable if NEC rating.

\*Pennsylvania Department of Environmental Resources and United States Mine Safety and Health Administration certification.

†Final put-up length may vary -0 to +10% from length shown.



# Industrial Data Solutions® — Industrial Coax

## ControlNet™ Quad Shielded Coax

Description	Part No.	UL NEC/ C(UL) CEC Type	Standard Lengths		Standard Unit Weight		Conductor (stranding) Diameter Nom. DCR	Nominal Core OD		Shielding Materials Nom. DCR	Nominal OD		Nom. Imp. (Ω)	Nom. Vel. of Prop.	Nominal Capacitance		Nominal Attenuation		
			Ft.	m	Lbs.	kg		Inch	mm		Inch	mm			pF/Ft.	pF/m	MHz	dB/ 100 Ft.	dB/ 100m

**RG-6/U Type • 18 AWG Solid Bare Copper-covered Steel Conductor • Duobond® IV\* Quad Shield (100% Coverage)**

<b>Foam Polyethylene Insulation • PVC Jacket (Black or Intrinsically Safe Blue)</b>																			
	<b>3092A</b>	NEC:	500	152.4	20.0	9.1	18 AWG	.180	4.57	Duobond IV	.298	7.57	75	82%	16.2	53.1	1	.35	1.1
		CL2R CMR	1000	304.8	39.0	17.7	(solid)			Quad							2	.38	1.2
		CEC:	2000	609.6	78.0	35.4	.040"			Shield							5	.45	1.5
		CMG FT4	2500	762.2	92.5	42.0	BCCS			3.6Ω/M'							10	.59	1.9
							28.0Ω/M'			11.8Ω/km							20	.86	2.8
						91.8Ω/km										50	1.37	4.5	
																100	1.97	6.5	
																200	2.82	9.3	
																300	3.48	11.4	
																400	4.04	13.3	

Allen-Bradley P/N 1786

<b>Plenum • Foam FEP Insulation • Fluorocopolymer Jacket (Black or Intrinsically Safe Blue*)</b>																			
	<b>3093A</b>	NEC:	1000*	304.8	40.0	18.2	18 AWG	.170	4.32	Duobond IV	.274	6.96	75	82%	16.3	53.5	1	.36	1.2
		CMP	2000†	609.6	80.0	36.3	(solid)			Quad							2	.38	1.2
		CEC:	2500†	762.0	95.0	43.1	.040"			Shield							5	.50	1.6
		CMP FT6					BCCS			3.6Ω/M'							10	.65	2.1
							28.0Ω/M'			11.8Ω/km							20	.95	3.1
						91.8Ω/km										50	1.50	4.9	
																100	2.12	7.0	
																200	2.99	9.8	
																300	3.66	12.0	
																400	4.23	13.9	

\*Blue available as standard in 1000 ft. only.

Suitable for Outdoor and Direct Burial applications. • Allen-Bradley P/N 1786

**RG-6/U Type • 20 AWG Stranded (105x40) Bare Copper Conductor • Duobond IV\* Quad Shield (100% Coverage)**

<b>Foam Polyethylene Insulation • Black PVC Jacket</b>																			
	<b>3092F</b>	NEC:	1000	304.8	44.0	20.0	20 AWG	.183	4.65	Duobond IV	.303	7.70	75	79%	17.0	55.8	1	.36	1.2
		CL2R CMR	5000	1524.0	220.0	99.8	(105x40)			Quad							2	.47	1.5
		CEC:					.040"			Shield							5	.80	2.6
		CMG FT4					Bare			3.6Ω/M'							10	1.20	3.9
							Copper			11.8Ω/km							20	2.00	6.6
						10.5Ω/M'										50	3.20	10.5	
						34.4Ω/km										100	4.60	15.1	
																200	6.50	21.3	
																300	8.00	26.2	
																400	9.30	30.5	

IEEE 802.4 MAP/IEEE 802.7 Mini-MAP. • Allen-Bradley P/N 1786

For Rockwell authorized Flexible ControlNet order YR28890 (Tinned Copper Braid version).

**RG-6/U Type • 18 AWG Solid Bare Copper-Covered Steel Conductor • Duobond IV\* Quad Shield (100% Coverage)**

<b>Aluminum Interlocked Armor • Foam Polyethylene Insulation • PVC Inner Jacket • Black PVC Sunlight Resistant Outer Jacket</b>																		
	<b>123092A</b>	NEC:	1000††	304.8	180.0	81.7	18 AWG	.180	4.57	Duobond IV	Inner Jacket	75	82%	16.2	53.2	1	.35	1.2
		CM					(solid)			Quad	.298	7.57				2	.38	1.3
		CEC:					.040"			Shield	Overall:					5	.45	1.5
		CMG, FT4, HL					BCCS			3.6Ω/M'	.620	15.75				10	.59	1.9
							28.0Ω/M'			11.8Ω/km						20	.86	2.8
						91.9Ω/km									50	1.37	4.5	
															100	1.97	6.5	
															200	2.82	9.3	
															300	3.48	11.4	
															400	4.04	13.3	

Allen-Bradley P/N 1786

Jacket sequentially marked at 1 meter intervals.

<b>Continuously Corrugated Aluminum Armor • Foam Polyethylene Insulation • PVC Inner Jacket • Black PVC Outer Jacket</b>																		
	<b>183092A</b>	NEC:	2000^	609.6	350.0	158.9	18 AWG	.180	4.57	Duobond IV	Inner Jacket	75	82%	16.2	53.2	1	.35	1.2
		CL2, CM					(solid)			Quad	.298	7.57				2	.38	1.3
							.040"			Shield	Overall:					5	.45	1.5
							BCCS			3.6Ω/M'	.570	14.48				10	.59	1.9
							28.0Ω/M'			11.8Ω/km						20	.86	2.8
						91.9Ω/km									50	1.37	4.5	
															100	1.97	6.5	
															200	2.82	9.3	
															300	3.48	11.4	
															400	4.04	13.3	

Allen-Bradley P/N 1786

Jacket sequentially marked at 2 ft. intervals.

BCCS = Bare Copper-covered Steel • DCR = DC Resistance • FEP = Fluorinated Ethylene-propylene

\*Duobond IV Quad Shield = Duobond II Foil + 60% aluminum braid + Duofoil + 40% aluminum braid.

†Final put-up length may vary 0 to +10% from length shown.

††Final put-up length may vary ±5% from length shown.

\*Final put-up length may vary ±10% from length shown.


ControlNet is a ControlNet International trademark.



For more information, contact Belden Technical Support: 1-800-BELDEN-1 • www.belden.com


# Industrial Data Solutions® — Industrial Coax

## ControlBus™ Quad Shielded Coax


Description	Part No.	UL NEC/ C(UL) CEC Type	Standard Lengths		Standard Unit Weight		Conductor (stranding) Diameter Nom. DCR	Nominal Core OD		Shielding Materials Nom. DCR	Nominal OD		Nom. Imp. (Ω)	Nom. Vel. of Prop.	Nominal Capacitance		Nominal Attenuation		
			Ft.	m	Lbs.	kg		Inch	mm		Inch	mm			pF/Ft.	pF/m	MHz	dB/100 Ft.	dB/100m
<b>RG-6/U Type • 20 AWG</b> Stranded (105x40) Bare Copper Conductor • Duobond® IV* Quad Shield (100% Coverage)																			
<b>Foam Polyethylene Insulation • Black PVC Jacket</b>																			
	<b>High-Flex 3092F</b>	NEC:	1000	304.8	44.0	20.0	20 AWG (105x40) .040" Bare Copper 10.5Ω/M' 34.4Ω/km	.183	4.65	Duobond IV Quad Shield 3.6Ω/M' 11.8Ω/km	.303	7.70	75	79%	17.0	55.8	1	.36	1.2
		CL2R CMR	5000	1524.0	225.0	102.2											2	.47	1.5
		CEC:															5	.80	2.6
		CMG															10	1.20	3.9
		FT4															20	2.00	6.6
																	50	3.20	10.5
																	100	4.60	15.1
																	200	6.50	21.3
																	300	8.00	26.2
																	400	9.30	30.5

IEEE 802.4 MAP/IEEE 802.7 Mini-MAP.

### RG-6/U Type • 18 AWG Solid Bare Copper-covered Steel Conductor • Duobond IV\* Quad Shield (100% Coverage)


<b>Gas-Injected Foam Polyethylene Insulation • Gray PVC Jacket</b>																			
	<b>3131A</b>	NEC:	1000	304.8	41.0	18.6	18 AWG (solid) .040" BCCS 28.0Ω/M' 91.8Ω/km	.180	4.57	Duobond IV Quad Shield 3.6Ω/M' 11.8Ω/km	.300	7.62	75	82%	16.2	53.1	1	.35	1.1
		CL2R CMR	2500	762.0	100.0	45.4											2	.38	1.2
		CEC:															5	.45	1.5
		CMR FT4															10	.59	1.9
																	20	.86	2.8
																	50	1.37	4.5
																	100	1.97	6.5
																	200	2.82	9.3
																	300	3.48	11.4
																	400	4.04	13.3

IEEE 802.4 MAP/IEEE 802.7 Mini-MAP.  
Tap marks every 2.6 meters to aid users in installation.


<b>Plenum • Foam FEP Insulation • Gray Fluorocopolymer Jacket</b>																			
	<b>150°C 3132A</b>	NEC:	1000	304.8	36.0	16.3	18 AWG (solid) .040" BCCS 28.0Ω/M' 91.8Ω/km	.170	4.32	Duobond IV Quad Shield 3.6Ω/M' 11.8Ω/km	.274	6.96	75	82%	16.3	53.5	1	.36	1.2
		CMP															2	.38	1.2
		CEC:															5	.50	1.6
		CMP FT6															10	.65	2.1
																	20	.95	3.1
																	50	1.50	4.9
																	100	2.12	7.0
																	200	2.99	9.8
																	300	3.66	12.0
																	400	4.23	13.9

IEEE 802.4 MAP/IEEE 802.7 Mini-MAP.  
Tap marks every 2.6 meters to aid users in installation.  
Suitable for Outdoor and Direct Burial applications.

### RG-11/U Type • 14 AWG Solid Bare Copper-covered Steel Conductor • Duobond IV\* Quad Shield (100% Coverage)

<b>Gas-Injected Foam Polyethylene Insulation • Gray PVC Jacket</b>																			
	<b>3094A</b>	NEC:	500	152.4	35.5	16.1	14 AWG (solid) .064" BCCS 11.0Ω/M' 36.1Ω/km	.280	7.11	Duobond IV Quad Shield 1.5Ω/M' 4.9Ω/km	.407	10.34	75	82%	16.2	53.1	1	.16	.5
		CL2R CMR	1000	304.8	62.0	28.1											2	.18	.6
		CEC:	2000	609.6	140.0	63.6											5	.26	.9
		CMG FT4															10	.38	1.2
																	20	.55	1.8
																	50	.83	2.7
																	100	1.17	3.8
																	200	1.60	5.3
																	300	1.99	6.5
																	400	2.30	7.5

IEEE 802.4 MAP  
Tap marks every 2.6 meters to aid users in installation.

<b>Plenum • Foam FEP Insulation • Gray Fluorocopolymer Jacket</b>																			
	<b>150°C 3095A</b>	NEC:	1000	304.8	76.0	34.5	14 AWG (solid) .064" BCCS 11.0Ω/M' 36.1Ω/km	.280	7.11	Duobond IV Quad Shield 3.9Ω/M' 12.8Ω/km	.387	9.83	75	82%	16.5	54.1	1	.17	.6
		CMP															2	.22	.7
		CEC:															5	.28	.9
		CMP FT6															10	.40	1.3
																	20	.60	2.0
																	50	1.20	3.9
																	100	1.70	5.6
																	200	2.50	8.2
																	300	3.04	10.0
																	400	3.50	11.5

IEEE 802.4 MAP  
Tap marks every 2.6 meters to aid users in installation.  
Suitable for Outdoor and Direct Burial applications.

BCCS = Bare Copper-covered Steel • DCR = DC Resistance • FEP = Fluorinated Ethylene-propylene  
\*Duobond IV Quad Shield = Duobond II Foil + 60% aluminum braid + Duofoil® + 40% aluminum braid.

# Industrial Data Solutions® — Industrial Data

## DataBus® ISA/SP-50 FOUNDATION Fieldbus or PROFIBUS Cables

Description	Part No.	UL NEC/ C(UL) CEC Type	Standard Lengths		Standard Unit Weight		Conductor (stranding) Diameter Nom. DCR	Nominal Core OD		Shielding Materials Nom. DCR	Nominal OD		Nom. Imp. (Ω)	Nom. Vel. of Prop.	Nominal Capacitance		Nominal Attenuation		
			Ft.	m	Lbs.	kg		Inch	mm		Inch	mm			pF/Ft.	pF/m	MHz	dB/100 Ft.	dB/100m

**FOUNDATION Fieldbus/PROFIBUS PA • 18 AWG** Stranded (7x26) TC Conductors • Beldfoil® Shield (100% Coverage) • TC Drain Wire

**Polyolefin Insulation • Orange or Blue PVC Jacket** (Color Code: Blue, Orange)

Type A	3076F	NEC:	250	76.2	10.5	4.8	(2) 18 AWG	.088	2.24	100%	.253	6.43	100 @	66%	24.0	78.7	.039	.08	.26
300V 105°C (31.25 KBits/sec)		PLTC CM	500	152.4	18.5	8.4	(7x26)			Beldfoil Shield				31.25 KHz					
		ITC	1000	304.8	37.0	16.8	.048"			7.5Ω/M'									
		CEC:	2500	762.0	85.0	38.6	Tinned			24.6Ω/km									
		CM	5000†	1524.0	170.0	77.2	Copper												

123076F — Version with Aluminum Interlocked Armor  
 133076F — Version with Steel Interlocked Armor  
 YM47023 — CPE jacketed version  
 YM46698 — Black & White color-coded pairs  
 YM47090 — Various colored jackets  
 YM41725 — LSZH (FRNC) jacketed version



Fieldbus: Orange jacket. Profibus PA: Intrinsically Safe Blue jacket. Blue available as standard in 1000 ft. put-up only.

**FOUNDATION Fieldbus • 22 AWG** Stranded (7x30) TC Conductors • Beldfoil Shield (100% Coverage) • Tinned Copper Drain Wire

**Polyolefin Insulation • Orange PVC Jacket** (Color Code: Blue, Orange)

Type B	3077F	NEC:	500†	152.4	11.0	5.0	(2) 22 AWG	.059	1.50	100%	.196	4.97	100 @	66%	23.5	77.1	.039	.14	.45
300V 105°C (31.25 KBits/sec)		PLTC CM	1000†	304.8	23.0	10.4	(7x30)			Beldfoil Shield				31.25 KHz					
		ITC					.030"			11.4Ω/M'									
		CEC:					Tinned			37.4Ω/km									
		CM					Copper												

123077F — Version with Aluminum Interlocked Armor  
 133077F — Version with Steel Interlocked Armor  
 CPE and LSZH jacketed versions also available.



**FHDPE Insulation • Orange PVC Jacket** (Color Code: Blue, Orange)

High Speed▲	3078F	NEC:	250	76.2	10.0	4.5	(2) 22 AWG	.121	3.07	100%	.351	8.92	150 @	78%	8.5	27.9	.250	.18	.59
300V 75°C (1.0 & 2.5 MBits/sec)		PLTC CM	500	152.4	23.0	10.4	(7x30)			Beldfoil Shield				1 MHz			.625	.26	.85
		ITC					.030"			3.3Ω/M'							1.250	.34	1.12
		CEC:	1000	304.8	44.0	20.0	Tinned			11.1Ω/km							3.125	.55	1.81
		CM	2500	762.0	115.0	52.2	Copper												

123078F — Version with Aluminum Interlocked Armor  
 133078F — Version with Steel Interlocked Armor  
 CPE and LSZH jacketed versions also available.



**PROFIBUS DP • 22 AWG** Solid Bare Copper Conductors • Beldfoil (100% Coverage) + Tinned Copper Braid Shield (65% Coverage)

**FHDPE Insulation • Chrome or Purple PVC Jacket** (Color Code: Red, Green)

300V 75°C	3079A	NEC:	1000	304.8	56.0	25.4	(2) 22 AWG	.099	2.52	Beldfoil + 65% TC Braid Shield (100% Coverage)	.315	8.00	150	78%	8.5	27.9	.2	.27	.9
		PLTC CMG	2000	609.6	112.0	50.8	(solid)										4.0	.67	2.2
		CEC:	3600	1097.6	201.6	91.4	.026"										16.0	1.37	4.5
		CMG FT4					Bare Copper			3.9Ω/M'							100.0	3.75	12.3
							16.0Ω/M'			12.8Ω/km							300.0	6.52	21.4

123079A — Aluminum Interlocked Armor  
 133079A — Steel Interlocked Armor  
 YR45047 — CPE jacketed version  
 YR44731 — LSZH (FRNC) jacketed version

UL AWM 20201 (600V)  
 Siemens Sinec L2 cable.

**PROFIBUS DP • 22 AWG** Stranded (7x30) Bare Copper Conductors • Beldfoil (100% Coverage) + TC Braid Shield (65% Coverage)

**FR-FPE Insulation • Purple PVC Jacket** (Color Code: Red, Green)

300V 75°C	3079E	NEC:	1000	304.8	44.0	20.0	(2) 22 AWG	.099	2.52	Beldfoil + 65% TC Braid Shield (100% Coverage)	.315	8.00	150	78%	8.5	27.9	.2	.34	1.1
		PLTC CMG	1640	500.0	73.8	33.5	Stranded (7x30)										4.0	.81	2.7
		CEC:	3280	1000.0	144.3	65.5	Bare Copper			3.9Ω/M'							16.0	1.64	5.4
		CMG FT4					16.0Ω/M'			12.8Ω/km									

DCR = DC Resistance • FHDPE = Foamed High-Density Polyethylene • FR-FPE = Flame-Retardant Polyethylene • FRNC = Flame-Retardant Non-Corrosive • LSZH = Low-Smoke Zero-Halogen • TC = Tinned Copper  
 †Final put-up length may vary -0 to +10% from length shown.

▲ For HSE, see Industrial Ethernet Section for copper and fiber cables.

# Industrial Data Solutions® — Industrial Data

DeviceBus® for ODVA DeviceNet™

## DeviceNet Communications Rate Table

Communications Rate	Maximum Distance																			
	3082A		3082F		3082K		3083A		3084F		3084A/3085A		7895A		7896A		7897A		7900A	
	Ft.	m	Ft.	m	Ft.	m	Ft.	m	Ft.	m	Ft.	m	Ft.	m	Ft.	m	Ft.	m	Ft.	m
125 Kbps	1640	500	1640	500	1378	420	1640	500	328	100	328	100	984	300	1378	420	1640	500	328	100
250 Kbps	820	250	820	250	656	200	820	250	328	100	328	100	820	250	656	200	820	250	328	100
500 Kbps	328	100	328	100	246	75	328	100	328	100	328	100	328	100	328	100	328	100	328	100

Description	Part No.	UL NEC/ C(UL) CEC Type	Standard Lengths		Standard Unit Weight		Conductor (stranding) Diameter Nom. DCR	Shielding Materials Nom. DCR	Color Code	Nominal OD		Nom. Imp. (Ω)	Nom. Vel. of Prop.	Nominal Capacitance		Nominal Attenuation		
			Ft.	m	Lbs.	kg				Inch	mm			pF/Ft.	pF/m	MHz	dB/ 100 Ft.	dB/ 100m

**600V Class 1 Thick • 15 and 18 AWG Stranded TC Conductors • Individually Foil Shielded (100% Coverage) + Overall TC Braid (65% Coverage)**

PVC/Nylon Insulation (Power) • FEP Insulation (Data) • Gray Sunlight/Oil-resistant PVC Jacket																		
<b>High Velocity Thick</b> 600V 75°C	<b>7897A</b>	NEC:	500	152.4	69.5	31.6	(2)15 AWG TC	100%	Power Pair:	.460	11.7	—	—	—	—	—	—	—
		TC-ER	1000	304.8	135.0	61.3	(19x28)	Individual	Red&Black									
			2000	609.6	274.0	124.4	3.6Ω/M'	Foil										
						11.8Ω/km	+ Overall											
						(2)18 AWG TC	65%	Data Pair:			120	75%	12.0	39.4	.125	.13	.43	
						(19x30)	TC Braid	Blue&White							.500	.25	.82	
						6.9Ω/M'	1.8Ω/M'								1.000	.40	1.31	
						22.6Ω/km	5.9Ω/km											

18 AWG stranded (19x30) tinned copper drain wire.  
Meter marks on jacket to aid users in installation.  
Allen-Bradley P/N 1485 CPI-A

**600V Class 1 ODVA Cable V • 16 and 18 AWG Stranded TC Cond. • Individ. Foil Shielded (100% Coverage) + Overall TC Braid (65% Coverage)**

PVC/Nylon Insulation (Power) • F-R Polypropylene Insulation (Data) • Gray Sunlight/Oil-resistant PVC Jacket																		
<b>600V 75°C</b>	<b>7896A</b>	NEC:	500	152.4	89.0	40.4	(2)16 AWG TC	100%	Power Pair:	.525	13.34	—	—	—	—	—	—	—
		TC-ER	1000	304.8	168.0	76.2	(19x29)	Individual	Red&Black									
			2000	609.6	340.0	154.2	4.9Ω/M'	Foil										
						16.1Ω/km	+ Overall											
						(2)18 AWG TC	65%	Data Pair:			120	64%	14.7	48.2	.125	.13	.43	
						(19x30)	TC Braid	Blue&White							.500	.25	.82	
						6.9Ω/M'	1.8Ω/M'								1.000	.40	1.31	
						22.6Ω/km	5.9Ω/km											

C(UL) AWM I/II A/B  
16 AWG stranded (19x29) tinned copper drain wire.  
Meter marks on jacket to aid users in installation.  
Allen-Bradley P/N 1485 CPI-A

**600V Class 1 ODVA Cable IV • 16 and 18 AWG Stranded Tinned Copper Conductors • Unshielded**

PVC/Nylon Insulation (Power) • F-R Polypropylene Insulation (Data) • Gray Sunlight/Oil-resistant PVC Jacket																		
<b>Drop</b> 600V 75°C	<b>7900A</b>	NEC:	500	152.4	51.0	23.1	(2)16 AWG TC	Unshielded	Power Pair:	.430	10.92	—	—	—	—	—	—	—
		TC-ER	1000	304.8	105.0	47.6	(19x29)		Red&Black									
		CEC: FT1					4.9Ω/M'											
						16.1Ω/km												
						(2)18 AWG TC		Data Pair:			120	64%	14.7	48.2	.125	.13	.43	
						(19x30)		Blue&White							.500	.25	.82	
						6.9Ω/M'									1.000	.40	1.31	
						22.6Ω/km												

C(UL) AWM I/II A/B  
Meter marks on jacket to aid users in installation.  
Allen-Bradley P/N 1485 CPI-C

DCR = DC Resistance • FEP = Fluorinated Ethylene-propylene • F-R = Flame-retardant • TC = Tinned Copper • TC-ER = Tray Cable Exposed Run per 2005 NEC Article 336

ODVA DeviceNet is an Open DeviceNet Vendor Association, Inc. trademark.



For more information, contact Belden Technical Support: 1-800-BELDEN-1 • www.belden.com

# Industrial Data Solutions® — Industrial Data

DeviceBus® for ODVA DeviceNet™

Description	Part No.	UL NEC/ C(UL) CEC Type	Standard Lengths		Standard Unit Weight		Conductor (stranding) Diameter Nom. DCR	Shielding Materials Nom. DCR	Color Code	Nominal OD		Nom. Imp. (Ω)	Nom. Vel. of Prop.	Nominal Capacitance		Nominal Attenuation		
			Ft.	m	Lbs.	kg				Inch	mm			pF/Ft.	pF/m	MHz	dB/ 100 Ft.	dB/ 100m

**300V Class 2 Thick • 15 and 18 AWG Stranded TC Cond. • Individually Foil Shielded (100% Coverage) + Overall TC Braid (65% Coverage)**

**PVC Insulation (Power) • FPE Insulation (Data) • Sunlight- and Oil-resistant PVC Jacket (Available in Gray or Red)**

Thick 75°C	<b>3082A</b>	NEC: CMG, PLTC-ER CEC: CMG FT4	500† 1000 2000†	152.4 304.8 609.6	71.0 138.0 280.0	32.2 62.6 127.0	(2)15 AWG TC (19x28) 3.6Ω/M' 11.8Ω/km (2)18 AWG TC (19x30) 6.9Ω/M' 22.6Ω/km	100% Individual Foil + Overall 65% TC Braid 1.8Ω/M' 5.9Ω/km	Power Pair: Red&Black  Data Pair: Blue&White	.480 12.19	— —	— —	— —	— —	— —	— —	— —	— —	— —
---------------	--------------	--	-----------------------	-------------------------	------------------------	-----------------------	--	--	--	---------------	--------	--------	--------	--------	--------	--------	--------	--------	--------

1500 ft. and 2000 ft. put-ups not available in Red.  
UL AWM 20201 (600V) • C(UL) AWM I/II A  
18 AWG stranded (19x30) tinned copper drain wire.  
Meter marks on jacket to aid users in installation. • Allen-Bradley P/N 1485 CPI-A

High-Flex Thick 75°C	<b>3082F</b>	NEC: CMG, PLTC-ER CEC: CMG FT4	500† 1000 2000†	152.4 304.8 609.6	72.5 140.0 284.0	32.9 63.5 128.8	(2)15 AWG TC (65x33) 3.6Ω/M' 11.8Ω/km (2)18 AWG TC (65x36) 6.9Ω/M' 22.6Ω/km	100% Individual Foil + Overall 65% TC Braid 1.8Ω/M' 5.9Ω/km	Power Pair: Red&Black  Data Pair: Blue&White	.480 12.19	— —	— —	— —	— —	— —	— —	— —	— —	— —	— —
----------------------------	--------------	--	-----------------------	-------------------------	------------------------	-----------------------	--	--	--	---------------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------

1500 ft. and 2000 ft. put-ups not available in Red.  
UL AWM 20201 (600V) • C(UL) AWM I/II A  
18 AWG stranded (65x36) tinned copper drain wire.  
Meter marks on jacket to aid users in installation. • Allen-Bradley P/N 1485 CPI-A

**PVC Insulation (Power) • FPE Insulation (Data) • Yellow CPE Jacket**

Thick 75°C	<b>3083A</b>	NEC: CMG, PLTC CEC: CMG FT4	1000 2000	304.8 609.6	137.0 278.0	62.1 126.1	(2)15 AWG TC (19x28) 3.6Ω/M' 11.8Ω/km (2)18 AWG TC (19x30) 6.9Ω/M' 22.6Ω/km	100% Individual Foil + Overall 65% TC Braid 1.8Ω/M' 5.9Ω/km	Power Pair: Red&Black  Data Pair: Blue&White	.475 12.07	— —	— —	— —	— —	— —	— —	— —	— —	— —	— —
---------------	--------------	--------------------------------------	--------------	----------------	----------------	---------------	--	--	--	---------------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------

18 AWG stranded (19x30) tinned copper drain wire.  
Meter marks on jacket to aid users in installation. • Allen-Bradley P/N 1485 CPI-A

**300V Class 2 Thin • 22 and 24 AWG Stranded TC Conductors • Individ. Foil Shielded (100% Coverage) + Overall TC Braid (65% Coverage)**

**PVC Insulation (Power) • FPE Insulation (Data) • Gray Sunlight- and Oil-resistant PVC Jacket**

Thin 75°C	<b>3084A</b>	NEC: CL2 CMG CEC: CMG FT4	500 1000† 2000	152.4 304.8 609.6	22.0 47.0 96.0	10.0 21.3 43.6	(2)22 AWG TC (19x34) 17.5Ω/M' 57.4Ω/km (2)24 AWG TC (19x36) 91.9Ω/km	100% Individual Foil + Overall 65% TC Braid 28.0Ω/M' 10.5Ω/km	Power Pair: Red&Black  Data Pair: Blue&White	.280 7.11	— —	— —	— —	— —	— —	— —	— —	— —	— —	— —
--------------	--------------	------------------------------------	----------------------	-------------------------	----------------------	----------------------	--	--	--	--------------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------

†1000 ft. put-up also available in Red.  
22 AWG stranded (19x34) tinned copper drain wire. • C(UL) AWM I/II A  
Meter marks on jacket to aid users in installation. • Allen-Bradley P/N 1485 CPI-C

High-Flex Thin 75°C	<b>3084F</b>	NEC: CL2 CMG CEC: CMG FT4	500 1000 2000	152.4 304.8 609.6	22.0 47.0 96.0	10.0 21.3 43.6	(2)22 AWG TC (154x44) 17.5Ω/M' 57.4Ω/km (2)24 AWG TC (105x44) 28.0Ω/M' 91.9Ω/km	100% Individual Foil + Overall 65% TC Braid 3.2Ω/M' 10.5Ω/km	Power Pair: Red&Black  Data Pair: Blue&White	.275 6.99	— —	— —	— —	— —	— —	— —	— —	— —	— —	— —
---------------------------	--------------	------------------------------------	---------------------	-------------------------	----------------------	----------------------	--	---	--	--------------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------

C(UL) AWM I/II A  
22 AWG stranded (26x36) tinned copper drain wire.  
Meter marks on jacket to aid users in installation. • Allen-Bradley P/N 1485 CPI-C

**PVC Insulation (Power) • FPE Insulation (Data) • Yellow CPE Jacket**

Thin 75°C	<b>3085A</b>	NEC: CL2 CMG CEC: CMG FT4	500 1000 2000	152.4 304.8 609.6	25.0 47.0 96.0	11.4 21.4 43.6	(2)22 AWG TC (19x34) 17.5Ω/M' 57.4Ω/km (2)24 AWG TC (19x36) 28.0Ω/M' 91.9Ω/km	100% Individual Foil + Overall 65% TC Braid 3.2Ω/M' 10.5Ω/km	Power Pair: Red&Black  Data Pair: Blue&White	.280 7.11	— —	— —	— —	— —	— —	— —	— —	— —	— —	— —
--------------	--------------	------------------------------------	---------------------	-------------------------	----------------------	----------------------	--	---	--	--------------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------

22 AWG stranded (19x34) tinned copper drain wire.  
Meter marks on jacket to aid users in installation. • Allen-Bradley P/N 1485 CPI-C

DCR = DC Resistance • FPE = Foam Polyethylene • PLTC-ER = Power Limited Tray Cable - Exposed Run per 2005 NEC Article 725 • TC = Tinned Copper

\*These values are Maximum Attenuation.

ODVA DeviceNet is an Open DeviceNet Vendor Association, Inc. trademark.




For more information, contact Belden Technical Support: 1-800-BELDEN-1 • www.belden.com





# Industrial Data Solutions® — Industrial Data

DeviceBus® for ODVA DeviceNet™

Description	Part No.	UL NEC/ C(UL) CEC Type	Standard Lengths		Standard Unit Weight		Conductor (stranding) Diameter Nom. DCR	Shielding Materials Nom. DCR	Color Code	Nominal OD		Nom. Imp. (Ω)	Nom. Vel. of Prop.	Nominal Capacitance		Maximum Attenuation		
			Ft.	m	Lbs.	kg				Inch	mm			pF/Ft.	pF/m	MHz	dB/100 Ft.	dB/100m
<b>300V Class 2 ODVA Cable III • 20 and 18 AWG Stranded TC Cond. • Indiv. Foil Shielded (100% Coverage) + Overall TC Braid (65% Coverage)</b>																		
<b>PVC Insulation (Power) • FPE Insulation (Data) • Gray Sunlight/Oil-resistant PVC Jacket</b>																		
Mid 75°C	<b>7895A</b>	NEC: CMG PLTC CEC: CMG FT4	500 1000	152.4 304.8	41.0 84.0	18.6 38.1	(2)18 AWG TC (19x30) 6.9Ω/M' 22.6Ω/km (2)20 AWG TC (19x32) 10.9Ω/M' 35.8Ω/km	100% Individual Foil + Overall 65% TC Braid 10.5Ω/km	Power Pair: Red&Black Data Pair: Blue&White	.378	9.60	—	—	—	—	—	—	—
																		
UL AWM 20201 (600V) 20 AWG stranded (19x32) tinned copper drain wire. Meter marks on jacket to aid users in installation.																		

**Flat • 16 AWG Stranded (19x29) Tinned Copper Conductors • Unshielded**

<b>PVC Insulation (Power) • FPE Insulation (Data) • Gray Sunlight-resistant PVC Jacket</b>																		
Class 2 300V 75°C	<b>3082K</b>	NEC: CMG CL2 PLTC CEC: CMG FT4	246 656 1378	75.0 200.0 420.0	30.8 78.7 165.4	14.0 35.7 75.1	(4)16 AWG TC (19x29) 4.9Ω/M' 16.1Ω/km	Unshielded	Power Pair: Red&Black Data Pair: Blue&White	.760 x .210	10.92 x 5.33	—	—	—	—	—	—	—
																		
Allen-Bradley P/N 1485 CPI-G																		

<b>PVC Insulation • Black Sunlight-resistant PVC Jacket</b>																		
Class 1 Power 600V 75°C	<b>3082KP</b>	NEC: CMG, ITC, PLTC, TC CEC: CMG FT4	246 656 1378	75.0 200.0 420.0	32.0 81.3 170.9	14.5 36.9 77.6	(4)16 AWG TC (19x29) 4.9Ω/M' 16.1Ω/km	Unshielded	Red&Black, Blue&White	.760 x .210	10.92 x 5.33	—	—	—	—	—	—	—
																		
Allen-Bradley P/N 1485 CPI-G																		

DCR = DC Resistance • FPE = Foam Polyethylene • F-R = Flame-retardant • TC = Tinned Copper if conductor, or Tray Cable if NEC rating.

ODVA DeviceNet is an Open DeviceNet Vendor Association, Inc. trademark.

# Industrial Data Solutions® — Industrial Data

## DeviceBus® for Honeywell Smart Distributed System

Description	Part No.	UL NEC/ C(UL) CEC Type	Standard Lengths		Standard Unit Weight		Conductor (stranding) Diameter Nom. DCR	Shielding Materials Nom. DCR	Color Code	Nominal OD		Nom. Imp. (Ω)	Nom. Vel. of Prop.	Nominal Capacitance		Nominal Attenuation		
			Ft.	m	Lbs.	kg				Inch	mm			pF/Ft.	pF/m	MHz	dB/ 100 Ft.	dB/ 100m

**22 AWG** Stranded Tinned Copper Conductors • Each Pair Individually Beldfoil® Shielded (100% Coverage) • Drain Wire

PVC Insulation (Power) • FPE Insulation (Data) • Gray PVC Jacket																		
UL AWM	<b>3087A</b>	NEC:	500	152.4	19.0	8.6	(4)22 AWG	100%	Power Pair:	.290	7.37	—	—	—	—	—		
Style 2464		CL2	1000	304.8	41.0	18.6	(19x34)	Beldfoil	Blue&Brown									
30V 80°C		CEC:	2000	609.6	84.0	38.1	.030"	Each Pair										
CSA AWM I/II A		FT1					Tinned Copper		Data Pair:			120	76%	12.0	39.4	.125	.23	.76
							17.5Ω/M'		Black&White							.500	.42	1.38
							57.4Ω/km									1.000	.60	1.97

Micro Cable (Drop)  
22 AWG stranded (19x34) tinned copper drain wire.

**16 and 20 AWG** Stranded Tinned Copper Conductors • Each Pair Individually Beldfoil Shielded (100% Coverage) • Drain Wire

PVC Insulation (Power) • FPE Insulation (Data) • Gray PVC Jacket																		
UL AWM	<b>3086A</b>	NEC:	500	152.4	43.5	19.7	(2)16 AWG TC	100%	Power Pair:	.398	10.11	—	—	—	—	—		
Style 2464		CL2	1000	304.8	88.0	39.9	(19x29)	Beldfoil	Blue&Brown									
30V 80°C		CEC:					.067"	Each Pair										
CSA AWM I/II A		FT1					3.6Ω/M'		Data Pair:			120	76%	12.0	39.4	.125	.18	.59
							11.8Ω/km		Black&White							.500	.35	1.15
							(2)20 AWG TC									1.000	.47	1.54
							(19x32)											
							.041"											
							10.0Ω/M'											
							32.8Ω/km											

Mini Cable (Trunk)  
20 AWG stranded (19x32) tinned copper drain wire.


DCR = DC Resistance • FPE = Foamed Polyethylene • TC = Tinned Copper

# Industrial Data Solutions® — Industrial Data


## DeviceBus® for Square D/Seriplex®

Description	Part No.	UL NEC/ C(UL) CEC Type	Standard Lengths		Standard Unit Weight		Conductor (stranding) Diameter Nom. DCR	Shielding Materials Nom. DCR	Color Code	Nominal OD		Nom. Imp. (Ω)	Nom. Vel. of Prop.	Nominal Capacitance*	
			Ft.	m	Lbs.	kg				Inch	mm			pF/Ft.	pF/m


**18 and 22 AWG** Stranded Tinned Copper Conductors • Overall 100% Beldfoil® Shield (100% Coverage) • 22 AWG (7x30) TC Drain Wire

Foam HDPE Insulation (Power) • Foam HDPE Insulation (Data) • Orange PVC Jacket															
	<b>3124A</b> UL AWM Style 20201 (600V 75°C)	NEC: CL2 CM CEC: CM	1000	304.8	47.0	21.3	(2)18 AWG (16x30)	100% Overall	Power Cdrs: Red&Black  Data Cdrs: White&Green	.308	7.82	—	—	20.0	65.6
							.040" TC 6.8Ω/M' 21.3Ω/km	Beldfoil Shield 10.7Ω/M' 35.1Ω/km							78%
Seriplex CBL 1822-P18															

**16 and 22 AWG** Stranded Tinned Copper Conductors • Overall 100% Beldfoil Shield (100% Coverage) • 22 AWG (7x30) TC Drain Wire

Foam HDPE Insulation (Power) • Foam HDPE Insulation (Data) • Orange PVC Jacket															
	<b>3125A</b> 300V 75°C	NEC: CL2 CM CEC: CM	500	152.4	31.5	14.3	(2)16 AWG (26x30)	100% Overall	Power Cdrs: Red&Black  Data Cdrs: White&Green	.368	9.35	—	—	28.0	91.9
							.060" TC 4.5Ω/M' 14.8Ω/km	Beldfoil Shield 10.7Ω/M' 35.1Ω/km							78%
Seriplex CBL 1622-P1															

**16, 22 and 12 AWG** Stranded Tinned Copper Conductors • Overall Beldfoil Shield (100% Coverage) • 22 AWG (7x30) TC Drain Wire

Foam HDPE Insulation (Control) • Foam HDPE Insulation (Data) • PVC Insulation (Power) • Orange PVC Jacket															
	<b>3126A</b> 300V 75°C	NEC: CL2 CM CEC: CM	1000	304.8	112.0	50.8	(2)16 AWG (26x30)	100% Overall	Control Cdrs: Red&Black Power Cdrs: Black&White, Red&White	.486	12.34	—	—	28.0	91.9
							.060" TC 4.5Ω/M' 14.7Ω/km	Beldfoil Shield 10.7Ω/M' 35.1Ω/km							
Seriplex CBL 162212-P16															

DCR = DC Resistance • HDPE = High-density Polyethylene • TC = Tinned Copper  
 \*Capacitance between one conductor and other conductors connected to shield.

Square D/Seriplex is a Square D/Schneider AEG trademark.




# Industrial Data Solutions® — Industrial Data

## DeviceBus® for Phoenix Contact InterBus®-S




Description	Part No.	UL NEC/ C(UL) CEC Type	Standard Lengths		Standard Unit Weight		Conductor (stranding) Diameter Nom. DCR	Shielding Materials Nom. DCR	Color Code	Nominal OD		Nom. Imp. (Ω)	Nom. Vel. of Prop.	Nominal Capacitance*	
			Ft.	m	Lbs.	kg				Inch	mm			pF/Ft.	pF/m

**18 and 24 AWG** Stranded Tinned Copper Conductors • Overall Beldfoil® Shield (100% Coverage) + Tinned Copper Braid (90% Coverage)

PVC Insulation (Power) • PE Insulation (Data) • Green Polyurethane Jacket															
UL AWM Style 20233 (300V 80°C) 	<b>3119A</b>	—	500	152.4	35.5	16.1	(3)18 AWG (7x26) .060" TC 6.6Ω/M' 21.7Ω/km (3pr)24 AWG (7x32) .024" TC 23.4Ω/M' 76.8Ω/km	100% Overall Beldfoil + 90% TC Braid 2.7Ω/M' 8.9Ω/km	Power: Red, Blue, Green w/ Yellow Stripe  Data: Pink&Gray, White&Brown, Yellow&Green	.333	8.46	—	—	—	—
			1000	304.8	71.0	32.2				100	66%	15.4	50.5		

**24 AWG** Stranded Tinned Copper Conductors • Overall 100% Beldfoil Shield (100% Coverage) + Tinned Copper Braid (90% Coverage)

Polyethylene Insulation • Green Polyurethane Jacket															
UL AWM Style 20233 (300V 80°C) 	<b>3120A</b>	—	500	152.4	26.0	11.8	(3pr)24 AWG (7x32) TC 26.0Ω/M' 85.3Ω/km	100% Overall Beldfoil + 90% TC Braid 2.7Ω/M' 8.9Ω/km	Pink&Gray, White&Brown, Yellow&Green	.277	7.04	100	66%	15.4	50.5
			1000	304.8	49.0	22.2									

DCR = DC Resistance • PE = Polyethylene • PVC = Polyvinyl Chloride • TC = Tinned Copper

\*Capacitance between one conductor and other conductors connected to shield.


InterBus-S is a Phoenix Contact trademark.




For more information, contact Belden Technical Support: 1-800-BELDEN-1 • www.belden.com

# Industrial Data Solutions® — Industrial Data

## EIA Industrial RS-485 PLTC/CM

Description	Part No.	UL NEC/ C(UL) CEC Type	No. of Pairs	Color Code	Standard Lengths		Standard Unit Weight		Nom. DCR		Nominal OD		Nom. Imp. (Ω)	Nom. Vel. of Prop.	Nom. Capacitance					
					Ft.	m	Lbs.	kg	Cond.	Shield	Inch	mm			* pF/ Ft.	* pF/ m	** pF/ Ft.	** pF/ m		
<b>22 AWG Stranded (7x30) TC Conductors • Twisted Pairs • Overall Beldfoil® Shield (100% Coverage) + TC Braid (90% Coverage) • Drain Wire<sup>^</sup></b>																				
<b>Datalene® Insulation • Black UV Resistant PVC Jacket (CPE jacket optional)</b>																				
	Oil Res II 300V	<b>3105A<sup>†</sup></b>	NEC: CM PLTC CEC: CM FT1	1	See Chart (below)	500 1000 5000 <sup>†</sup>	152.4 304.8 1523.9	23.0 50.0 255.0	10.4 22.7 115.8	14.7Ω/M' 48.2Ω/km	2.8Ω/M' 9.2Ω/km	.284 7.21	120	78%	11.0	36.1	20.9	68.6		
																			For CPE jacketed version order Part No. YR44345	
			<b>3106A</b>	NEC: CM PLTC CEC: CM FT1	1.5 <sup>*</sup>	White/Orange, Orange/White, Blue/White	500 1000 5000 <sup>†</sup>	152.4 304.8 1523.9	27.0 51.0 260.0	12.3 23.2 118.1	14.7Ω/M' 48.2Ω/km	2.8Ω/M' 9.2Ω/km	.300 7.62	120	78%	11.0	36.1	20.9	68.6	For CPE jacketed version order Part No. YR46721
																				For CPE jacketed version order Part No. YR46721
			<b>3107A<sup>†</sup></b>	NEC: CM PLTC CEC: CM FT1	2	See Chart (below)	1000 4000 5000 <sup>†</sup>	304.8 1219.2 1523.9	69.0 300.0 385.0	31.3 136.2 174.8	14.7Ω/M' 48.2Ω/km	1.8Ω/M' 5.9Ω/km	.356 9.04	120	78%	11.0	36.1	20.9	68.6	For CPE jacketed version order Part No. YR46792
																			For CPE jacketed version order Part No. YR46792	
		<b>3108A</b>	NEC: CM PLTC CEC: CM FT1	3	See Chart (below)	1000 2000	304.8 609.6	93.0 184.0	42.2 83.5	14.7Ω/M' 48.2Ω/km	1.5Ω/M' 4.9Ω/km	.420 10.67	120	78%	11.0	36.1	20.9	68.6	For CPE jacketed version order Part No. YR45287	
																			For CPE jacketed version order Part No. YR45287	
		<b>3109A</b>	NEC: CM PLTC CEC: CM FT1	4	See Chart (below)	1000 2000	304.8 609.6	107.0 218.0	48.6 99.0	14.7Ω/M' 48.2Ω/km	1.4Ω/M' 4.6Ω/km	.420 10.67	120	78%	11.0	36.1	20.9	68.6	For CPE jacketed version order Part No. YR44768	
																			For CPE jacketed version order Part No. YR44768	

<sup>\*</sup>3015A and 3107A are DMX512 Type.  
<sup>\*</sup>22 AWG stranded tinned copper drain wire.

<b>AL Interlocked Armor • Datalene® Insulation • PVC Inner Jacket • Black UV Resistant PVC Outer Jacket</b>																		
300V	<b>123107A</b> <small>(NEW)</small>	NEC: CM PLTC CEC: CMG FT4	2	See Chart (below)	5000 <sup>††</sup>	1523.9	1140.0	514.1		14.7Ω/M' 48.2Ω/km	1.8Ω/M' 5.9Ω/km	.650 16.51	120	78%	11.0	36.1	20.9	68.6
																		

<sup>\*</sup>22 AWG stranded tinned copper drain wire.

DCR = DC Resistance • TC = Tinned Copper

\* Capacitance between conductors.  
 \*\* Capacitance between one conductor and other conductors connected to shield.

<sup>†</sup> Final put-up length may vary -0 to +10% from length shown.  
<sup>††</sup> Final put-up length may vary ±10% for spools or reels and ±5% for UnReel® cartons from length shown.

<sup>\*</sup>All conductors are under the braid shield; one pair is under the Beldfoil shield.

### Color Code Chart

Pair No.	Color Combination
1	White/Blue Stripe Blue/White Stripe
2	White/Orange Stripe Orange/White Stripe
3	White/Green Stripe Green/White Stripe
4	White/Brown Stripe Brown/White Stripe





# Industrial Data Solutions® — Interconnect Cable


## Shielded Twisted Pair Cables

Description	Part No.	UL NEC/ C(UL) CEC Type	No. of Pairs	Color Code	Standard Lengths		Standard Unit Weight		Nom. DCR		Nominal OD		Nom. Imp. (Ω)	Nom. Vel. of Prop.	Nom. Capacitance			
					Ft.	m	Lbs.	kg	Cond.	Shield	Inch	mm			* pF/ Ft.	* pF/ m	** pF/ Ft.	** pF/ m

**24 AWG Stranded (7x32) TC Conductors • Twisted Pairs • Individually Beldfoil® Shielded (100% Coverage) • 24 AWG Stranded TC Drain Wire**

**Datalene® Insulation • Chrome PVC Jacket**

UL AWM Style 2493 (300V 60°C)	<b>9729</b>	NEC: CM CEC: CM	2	Red&Black, White&Black	100	30.5	4.3	2.0	24.0Ω/M'	15.0Ω/M'	.266	6.76	100	76%	12.5	41.0	23.2	76.1
					500	152.4	20.5	9.3	78.7Ω/km	49.3Ω/km								
					1000	304.8	39.0	17.7										
					10000	3048.0	390.0	177.1										



Z-Fold®


24 AWG stranded (7x32) tinned copper drain wire.

For Plenum version of 9729, see 89729 or 82729.

**22 AWG Stranded (7x30) TC Conductors • Twisted Pairs • Individually Beldfoil Shielded (100% Coverage) • 22 AWG Stranded TC Drain Wire**

**Polypropylene Insulation • Chrome PVC Jacket**

UL AWM Style 2919 (30V 80°C)	<b>8777</b>	NEC: CM CEC: CM	3	Red&Black, White&Black, Green&Black	100	30.5	4.6	2.1	15.0Ω/M'	10.6Ω/M'	.273	6.93	50	66%	30	98	55	180
					250	76.2	11.0	5.0	49.2Ω/km	34.8Ω/km								
					U-500	U-152.4	21.0	9.5										
					500	152.4	21.0	9.5										
					U-1000	U-304.8	41.0	18.6										
					1000	304.8	42.0	19.1										
					1640	499.9	67.2	30.5										
					3280	999.7	137.8	62.5										
					5000	1524.0	210.0	95.3										
					10000	3048.0	450.0	204.3										



Z-Fold®


22 AWG stranded (19x34) tinned copper drain wire.

For Plenum versions of 8777, see 88777, 87777 or 82777.

**22 AWG Stranded (7x30) TC Conductors • Twisted Pairs • Individually Beldfoil Shielded (100% Coverage) • 24 AWG Stranded TC Drain Wire**

**Polypropylene Insulation • Chrome PVC Jacket (Pairs Cabled on Common Axis to Reduce Diameter)**

300V RMS 60°C	<b>8723</b>	NEC: CM CEC: CM	2	Red&Black, Green&White	100	30.5	2.3	1.0	16.0Ω/M'	14.7Ω/M'	.168	4.27	45	66%	35	115	62	203
					U-500	U-152.4	10.5	4.8	52.5Ω/km	48.3Ω/km								
					500	152.4	10.0	4.5										
					U-1000	U-304.8	20.0	9.1										
					1000	304.8	20.0	9.1										
					1640	499.9	32.8	14.9										
					U-2000	U-609.6	40.0	18.2										
					2000	609.6	40.0	18.2										
					3280	999.7	65.6	29.8										
					5000	1524.0	95.0	43.1										
					10000	3048.0	200.0	90.8										



Z-Fold®

24 AWG stranded (7x32) tinned copper drain wire.

For Plenum versions of 8723, see 88723, 87723 or 82723.

**Plenum • FEP Insulation • Red FEP Jacket (Pairs Cabled on Common Axis to Reduce Diameter)**

300V RMS, Non-conduit	<b>88723</b>	NEC: CMP CEC: CMP FT6	2	Red&Black, Green&White	100	30.5	3.4	1.5	16.0Ω/M'	14.7Ω/M'	.148	3.76	40	69%	35	115	67	220
					500	152.4	11.0	5.0	52.5Ω/km	48.3Ω/km								
					1000	304.8	21.0	9.5										




Z-Fold®

24 AWG stranded (7x32) tinned copper drain wire.

**18 AWG Stranded (16x30) TC Conductors • Twisted Pair • Overall Beldfoil Shield (100% Coverage) • 20 AWG Stranded TC Drain Wire**

**Polyethylene Insulation • Chrome PVC Jacket**

UL AWM Style 2092 (300V 60°C)	<b>8760</b>	NEC: CM CEC: CM	1	Black &Clear	250	76.2	6.8	3.1	—	—	.222	5.64	—	—	24	79	44	144
					U-500	U-152.4	13.0	5.9										
					500	152.4	13.0	5.9										
					U-1000	U-304.8	26.0	11.8										
					1000	304.8	26.0	11.8										
					2000	609.6	50.0	22.7										
					5000	1524.0	135.0	61.3										
					10000	3048.0	260.0	118.0										



Shorting Fold

20 AWG stranded (7x28) tinned copper drain wire.

For Plenum versions of 8760, see 88760, 87760 or 82760.


DCR = DC Resistance • FEP = Fluorinated Ethylene Propylene • PVC = Polyvinyl Chloride • TC = Tinned Copper

\* Capacitance between conductors.

\*\* Capacitance between one conductor and other conductors connected to shield.

# VFD (Variable Frequency Drive) Cable


## 1000V UL Flexible Motor Supply Cable

Description	Part No.	AWG	Cond. Stranding	Standard Lengths		Standard Unit Wt.		Nominal OD		Maximum Pull Tension		Minimum Bend Radius		
				Ft.	m	Lbs.	kg	Inch	mm	Lbs.	N	Inch	mm	
<b>4-cond.</b> (3) Stranded TC Circuit Conductors + (1) Ground* • Overall Beldfoil® (100% Coverage) + TC Braid Shield (85% Coverage) • TC Drain Wire*														
<b>XLPE Insulation (Circuit Condrs) • PVC Insulation (Ground) • Black Sunlight- and Oil-resistant PVC Jacket</b>														
<b>1000V UL Flexible Motor Supply Cable</b> 600V UL 1277 Type TC-ER per 2005 NEC Article 336 <b>1000V CSA AWM I/II A/B FT4</b> 90°C Wet/Dry 	<b>29500</b>	16	26x30	250†	76.2	46.2	21.0	.53	13.46	128	568	3.9	99.06	
				500†	152.4	93.0	42.2							
				1000†	304.8	182.0	82.6							
				6000†	1828.8	1080.0	490.3							
	All Allen-Bradley Series 160 and 1305 drives.													
	<b>29501</b>	14	41x30	250†	76.2	59.7	27.1	.55	13.97	212	942	4.5	114.30	
				500†	152.4	120.0	54.5							
				1000†	304.8	233.0	105.8							
				5000†	1524.0	1215.0	551.6							
	Allen-Bradley 1336F(S)-BRF05 through BRF100													
<b>29502</b>	12	65x30	250†	76.2	69.8	31.7	.60	15.24	336	1495	4.9	124.46		
			500†	152.4	151.5	68.8								
			1000†	304.8	298.0	135.3								
			5000†	1524.0	1570.0	712.8								
Allen-Bradley 1336F(S)-BRF150, BRF200														
<b>29503</b>	10	105x30	250†	76.2	91.3	41.4	.66	16.76	525	2335	5.4	137.16		
			500†	152.4	194.5	88.3								
			1000†	304.8	375.0	170.3								
			5000†	1524.0	2025.0	919.4								
Allen-Bradley 1336F(S)-B015														
<b>29504</b>	8	7x19x29	250†	76.2	158.5	72.0	.89	22.61	1328	5906	7.3	185.42		
			500†	152.4	332.0	150.7								
			1000†	304.8	660.0	299.6								
			5000†	1524.0	3135.0	1423.3								
Allen-Bradley 1336F(S)-B020														
<b>29505</b>	6	7x19x27	250†	76.2	221.3	100.5	.99	25.15	2048	9109	8.0	203.20		
			1000†	304.8	906.0	411.3								
			3500†	1066.8	3206.0	1455.5								
			5000†	1524.0	3206.0	1455.5								
Allen-Bradley 1336F(S)-B025, B030														
<b>29506</b>	4	7x19x25	250†	76.2	319.5	145.1	1.15	29.21	3152	14021	9.2	233.68		
			1000†	304.8	1231.0	558.9								
			3000†	914.4	3843.0	1744.7								
			5000†	1524.0	3843.0	1744.7								
Allen-Bradley 1336F(S)-BX040, B040														
<b>29507</b>	2	7x19x23	250†	76.2	437.8	198.7	1.29	32.77	4872	21672	10.5	266.70		
			500†	152.4	875.5	397.5								
			1000†	304.8	1711.0	776.8								
			2000†	609.6	3682.0	1671.6								
Allen-Bradley 1336F(S)-B050, BX060, B060														

Color Code: ICEA Method 4 (Black and Numbered); Green/Yellow Ground

UL Direct Burial. XHHW-2, RHW-2 rated circuit conductors.

### Three (3) Stranded TC Circuit Conductors + (3) Symmetrical Bare Copper Grounds • (2) Spiral Copper Tape Shields (100% Coverage)

<b>XLPE Insulation (Circuit Condrs) • Black Sunlight- and Oil-resistant PVC Jacket</b>													
<b>1000V UL Flexible Motor Supply Cable</b> 600V UL 1277 Type TC-ER per 2005 NEC Article 336 <b>600V CSA AWM I/II A/B FT4</b> 90°C Wet/Dry 	<b>29528</b> <small>(new)</small>	1	7x19x22	250 ††	76.2	398.8	181.0	1.20	30.48	2650	11788	12.0	304.8
				1000 ††	304.8	1642.0	746.0						
				3000 †	1524.0	4779.0	2169.7						
	<b>29529</b> <small>(new)</small>	1/0	7x19x21	250 ††	76.2	525.8	238.7	1.29	32.77	3537	15733	12.9	327.7
				1000 ††	304.8	2050.0	930.7						
				2000 †	609.6	3954.0	1795.1						
	<b>29530</b> <small>(new)</small>	2/0	7x19x20	250 ††	76.2	602.0	273.3	1.40	35.56	4200	18682	14.0	355.6
				1000 ††	304.8	2362.0	1072.4						
				2000 †	609.6	4744.0	2153.8						
	<b>29531</b> <small>(new)</small>	3/0	7x19x19	250 ††	76.2	699.5	317.6	1.52	38.61	5025	22352	15.2	386.1
1000 ††				304.8	2708.0	1229.4							
3000 †				1524.0	5436.0	2467.9							
<b>29532</b> <small>(new)</small>	4/0	7x19x18	250 ††	76.2	881.0	400.0	1.68	42.67	6670	29670	16.8	426.7	
			500 ††	152.4	1873.0	850.3							
			1500 †	457.2	5619.0	2551.0							

Color Code: ICEA Method 4 (Black and Numbered)

UL Direct Burial. XHHW-2 circuit conductors.

TC = Tinned Copper • TC-ER = Tray Cable - Exposed Run per 2005 NEC Article 336 • XLPE = Cross-linked Polyethylene

\*Ground(s) and drain wire(s) are same AWG as circuit conductors.

†Final put-up length may vary ±10% from length shown.

††Final put-up length may vary ±5% from length shown.

### Encoder Cables

Belden also offers the following standard cables for encoder applications. Encoder cables help feed information to the microprocessor regarding both the speed and the position of the rotor.

Part No.	Pairs	AWG
<b>8790</b> (Power Supply)	1	18
<b>9729</b>	2	24
<b>9730, 89730</b>	3	24
<b>9728</b>	4	24
<b>9892</b>	4	20

See Index for page numbers.



# Belden Infinity® Flexible Automation Cable

## Overview and Application Guide

Belden Infinity is a complete line of control, data, video, and power cables specifically designed to handle the rigorous speeds and near-constant motion encountered in automated equipment such as robots, pick and place machines, automatic handling systems, multi-axis machine tools, and conveyor systems.

When the application demands highly flexible cables offering exceptional cable life and performance, specify Belden Infinity.

### Belden Infinity Means More Performance And Longer Life

**Reduced Cable Memory** — Belden Infinity's unique design and neutralized cabling, results in cables that are relaxed, with almost no memory.

**Greater Flex Life** — Belden Infinity cables offer superior flexibility and are able to handle the vigorous motions and high speeds encountered in automated equipment.

**Greater System Uptime** — Belden Infinity cables combine specialized manufacturing techniques with precision copper stranding and rugged insulation and jacketing compounds to maximize flex life and reliability.

**No Talc Problems** — Unlike the potentially harmful talc used in other cables, Belden's non-toxic, non-irritating slipper compound facilitates flexing and also complies with OSHA regulations. It's safer for employees and operators and is less likely to contaminate solder joints or mechanical compounds.

**CE Conformity** — All Belden Infinity cables are CE marked per the Conformité Européenne low voltage directive, allowing trade of product in Europe.

**Custom Designs** — Other designs available upon request.

### Product Series Descriptions

- **C-TC+** — The C-TC+ series is designed for C-track and extreme flex applications up to 9 million flex cycles\*. This series utilizes super fine stranding and some of the tightest lay lengths allowed by UL, providing outstanding flex life.
- **FCC** — The FCC series is a cost effective alternative for C-track and moderate flexing applications rated up to 1 million flex cycles\*.
- **Flex Data Cables** — Belden Infinity Flex Data cables are designed for industrial applications where precise data transmission is combined with high-flexing. These cables are ideal for effective operation of computer controlled equipment or other automated production processes, even in harsh environments.
- **Flex Vision** — Belden Infinity Vision cables are continuous flex video cables designed for machine vision applications. They are ideal for motion-controlled video and with inspection and measurement equipment.

### Application Guide

Belden Infinity Series	C-Track Systems	Multi-Axis Machining	Robotics	Automated Assembly Systems	Material Handling Systems	Pick & Place Systems	Automated Storage Retrieval	Gantry Systems	Machine Vision	Motion-Controlled Video	Inspection & Measure Equip.	Festooning	Servo	Power
------------------------	-----------------	----------------------	----------	----------------------------	---------------------------	----------------------	-----------------------------	----------------	----------------	-------------------------	-----------------------------	------------	-------	-------

<b>FCC</b> Oil & abrasion resistant 600V UL & CSA rated Life Expectancy: Over 1 million flex cycles*	●	●		●	●	●	●	●			●	●	●	●
<b>C-TC+</b> Oil & abrasion resistant 600V UL & CSA rated Life Expectancy: Over 9 million flex cycles*	★	★	●	★	★	★	★	★			★	★	★	★
<b>DATA</b> Oil & abrasion resistant 300V UL & CSA rated Life Expectancy: Over 1 million flex cycles*	●	●	●	●	●	●	●	●			●	●		
<b>VISION</b> 30V UL & CSA rated Life Expectancy: Over 1 million flex cycles*	●	●		●	●	●	●	●	★	+	+	●		

● Good    + Better    ★ Best

\*Based on proper installation techniques in a C-track cable guide.



# Belden Infinity® Flexible Automation Cable


600V C-TC+ Control Cables for Extreme Flexing

(9 Million Flex Cycles\*)

Description	Part No.	No. of Cond.	Standard Lengths		Standard Unit Weight		Insulation Thickness		Jacket Thickness		Nominal OD		Maximum Pull Tension	
			Ft.	m	Lbs.	kg	Inch	mm	Inch	mm	Inch	mm	Lbs.	N

**20 AWG** Stranded (74x38) Bare Copper Conductors • Unshielded • Color Code: Red w/numbers + Green/Yellow ground


**PVC Insulation • Orange Oil- and Abrasion-resistant PVC Jacket**

	UL AWM Style 2587 (600V 90°C) CSA AWM I/II A/B	7101A	3	250 †	76.2	11.0	5.0	.020	.51	.045	1.14	.275	6.99	45	200
				500 †	152.4	24.5	11.1								
				1000 †	304.8	47.0	21.3								
		7102A	4	250 †	76.2	13.3	6.0	.020	.51	.045	1.14	.295	7.49	59	262
				500 †	152.4	27.5	12.5								
				1000 †	304.8	53.0	24.1								
		7105A	9	250 †	76.2	29.8	13.5	.020	.51	.055	1.40	.435	11.05	130	578
				500 †	152.4	52.0	23.6								
1000 †				304.8	104.0	47.2									
	7106A	12	250 †	76.2	32.3	14.6	.020	.51	.055	1.40	.455	11.56	178	792	
			500 †	152.4	66.5	30.2									
			1000 †	304.8	134.0	60.8									
	7107A	18	250 †	76.2	50.0	22.7	.020	.51	.065	1.65	.545	13.84	260	1156	
			500 †	152.4	101.0	45.9									
			1000 †	304.8	202.0	91.8									
	7108A	25	250 †	76.2	71.5	32.5	.020	.51	.080	2.03	.665	16.89	370	1645	
			500 †	152.4	143.5	65.2									

Temp Rating: -40° to 90°C  
(-5° to 90°C flexing)

**20 AWG** Stranded (74x38) Bare Copper Conductors • TC Braid Shield (85% Coverage) • Color Code: Red w/numbers + Green/Yellow ground


**PVC Insulation • PVC Inner Jacket • Orange Oil- and Abrasion-resistant PVC Outer Jacket**

	UL AWM Style 2587 (600V 90°C) CSA AWM I/II A/B	7106AS	12	250 †	76.2	57.5	26.1	.020	.51	Inner: .025	.64	.535	13.59	194	863
				500 †	152.4	116.0	52.7			Outer: .055	1.40				

Temp Rating: -40° to 90°C (-5° to 90°C flexing)

**18 AWG** Stranded (114x38) Bare Copper Conductors • Unshielded • Color Code: Red w/numbers + Green/Yellow ground


**PVC Insulation • Orange Oil- and Abrasion-resistant PVC Jacket**

	UL AWM Style 2587 (600V 90°C) CSA AWM I/II A/B	7110A	3	500 †	152.4	26.0	11.8	.020	.51	.035	.89	.300	7.62	69	307
				1000 †	304.8	50.0	22.7								
				7113A	7	250 †	76.2	29.0	13.2	.020	.51	.060	1.52	.438	11.13
	500 †	152.4	55.5	25.2											
	1000 †	304.8	111.0	50.4											
	7115A	12	250 †	76.2	40.3	18.3	.020	.51	.060	1.52	.513	13.03	270	1201	
			500 †	152.4	84.5	38.4									
			7116A	18	250 †	76.2	63.0	28.6	.020	.51	.060	1.52	.598	15.19	400
500 †	152.4	126.0	57.2												
	7117A	25	250 †	76.2	89.3	40.5	.020	.51	.083	2.11	.744	18.90	570	2535	
			500 †	152.4	179.0	81.3									

Temp Rating: -40° to 90°C  
(-5° to 90°C flexing)

**18 AWG** Stranded (114x38) Bare Copper Conductors • TC Braid Shield (85% Coverage) • Color Code: Red w/numbers + Green/Yellow ground

**PVC Insulation • PVC Inner Jacket • Orange Oil- and Abrasion-resistant PVC Outer Jacket**

	UL AWM Style 2587 (600V 90°C) CSA AWM I/II A/B	7111AS	4	250 †	76.2	4.0	1.8	.020	.51	Inner: .025	.64	.405	10.29	84	373
				500 †	152.4	60.5	27.5			Outer: .050	1.27				
	7115AS	12	250 †	76.2	72.8	33.1	.020	.51	Inner: .025	.64	.600	15.24	252	1121	
			500 †	152.4	144.5	65.6			Outer: .065	1.65					

PVC = Polyvinyl Chloride • TC = Tinned Copper

\*Based on proper installation techniques in a C-track cable guide.

†Final put-up length may vary ±10% from length shown.

# Belden Infinity® Flexible Automation Cable


600V C-TC+ Control Cables for Extreme Flexing

(9 Million Flex Cycles\*)

Description	Part No.	No. of Cond.	Standard Lengths		Standard Unit Weight		Insulation Thickness		Jacket Thickness		Nominal OD		Maximum Pull Tension	
			Ft.	m	Lbs.	kg	Inch	mm	Inch	mm	Inch	mm	Lbs.	N

**16 AWG** Stranded (190x38) Bare Copper Conductors • Unshielded • Color Code: Red w/numbers + Green/Yellow ground


**PVC Insulation • Orange Oil- and Abrasion-resistant PVC Jacket**

	UL AWM Style 2587 (600V 90°C) CSA AWM I/II A/B	<b>7122A</b> 3	250 †	76.2	16.3	7.4	.020	.51	.045	1.14	.325	8.26	114	507	
			500 †	152.4	43.5	19.8									
			1000 †	304.8	84.0	38.1									
		<b>7125A</b> 7	250 †	76.2	38.5	17.5	.020	.51	.060	1.52	.480	12.19	260	1156	
			500 †	152.4	73.5	33.4									
			1000 †	304.8	148.0	67.2									
		<b>7126A</b> 9	250 †	76.2	49.3	22.4	.020	.51	.060	1.52	.545	13.84	340	1512	
			500 †	152.4	112.5	55.6									
			1000 †	304.8	243.0	110.3									
		<b>7127A</b> 12	250 †	76.2	53.3	24.2	.020	.51	.060	1.52	.570	14.48	450	2001	
			500 †	152.4	122.5	55.6									
			1000 †	304.8	243.0	110.3									
		<b>7128A</b> 18	250 †	76.2	85.3	38.7	.020	.51	.060	1.52	.670	17.02	680	3025	
			500 †	152.4	172.0	78.1									
			1000 †	304.8	344.0	156.2									
		<b>7129A</b> 25	250 †	76.2	124.5	56.5	.020	.51	.080	2.03	.820	20.83	950	4226	
			500 †	152.4	249.0	113.0									
			1000 †	304.8	498.0	226.0									

Temp Rating: -40° to 90°C  
(-5° to 90°C flexing)

**16 AWG** Stranded (190x38) BC Conductors • TC Braid Shield (85% Coverage) • Color Code: Red w/numbers + Green/Yellow ground


**PVC Insulation • PVC Inner Jacket • Orange Oil- and Abrasion-resistant PVC Outer Jacket**

	UL AWM Style 2587 (600V 90°C) CSA AWM I/II A/B	<b>7123AS</b> 4	250 †	76.2	40.8	18.5	.020	.51	Inner: .64		.420	10.67	154	685
			500 †	152.4	78.0	35.4			Outer: .64					
									.040    1.02					

Temp Rating: -40° to 90°C  
(-5° to 90°C flexing)

**14 AWG** Stranded (266x38) Bare Copper Conductors • Unshielded • Color Code: Red w/numbers + Green/Yellow ground


**PVC Insulation • Orange Oil- and Abrasion-resistant PVC Jacket**

	UL AWM Style 2587 (600V 90°C) CSA AWM I/II A/B	<b>7136A</b> 4	250 †	76.2	39.0	17.7	.025	.64	.050	1.27	.430	10.92	212	943
			500 †	152.4	74.5	33.8								
			1000 †	304.8	149.0	67.6								

Temp Rating: -40° to 90°C  
(-5° to 90°C flexing)

**14 AWG** Stranded (266x38) BC Conductors • TC Braid Shield (85% Coverage) • Color Code: Red w/numbers + Green/Yellow ground


**PVC Insulation • PVC Inner Jacket • Orange Oil- and Abrasion-resistant PVC Outer Jacket**

	UL AWM Style 2587 (600V 90°C) CSA AWM I/II A/B	<b>7136AS</b> 4	250 †	76.2	74.0	33.6	.025	.64	Inner: .64		.500	12.70	208	925
			500 †	152.4	145.0	65.8			Outer: .64					
									.045    1.14					

Temp Rating: -40° to 90°C  
(-5° to 90°C flexing)

**12 AWG** Stranded (413x38) Bare Copper Conductors • Unshielded • Color Code: Red w/numbers + Green/Yellow ground

**PVC Insulation • Orange Oil- and Abrasion-resistant PVC Jacket**

	UL AWM Style 2587 (600V 90°C) CSA AWM I/II A/B	<b>7145A</b> 4	250 †	76.2	72.5	32.9	.030	.76	.075	1.91	.545	13.84	274	1218
			500 †	152.4	146.0	66.3								
			1000 †	304.8	292.0	132.6								

Temp Rating: -40° to 90°C  
(-5° to 90°C flexing)

BC = Bare Copper • TC = Tinned Copper

\*Based on proper installation techniques in a C-track cable guide.

†Final put-up length may vary ±10% from length shown.



# Belden Infinity® Flexible Automation Cable


600V FCC Control Cables for Moderate Flexing

(1 Million Flex Cycles\*)

Description	Part No.	No. of Cond.	Standard Lengths		Standard Unit Weight		Insulation Thickness		Jacket Thickness		Nominal OD		Maximum Pull Tension	
			Ft.	m	Lbs.	kg	Inch	mm	Inch	mm	Inch	mm	Lbs.	N


**20 AWG** Stranded (10x30) Bare Copper Conductors • Unshielded • Color Code: Black w/numbers + Green/Yellow ground

**PVC Insulation • Gray Oil- and Abrasion-resistant PVC Jacket**

UL AWM Style 2587 (600V 90°C) CSA AWM I/II A/B 	7400A	2	250 †	76.2	11.0	5.0	.022	.56	.040	1.02	.240	6.10	26	116	
			500 †	152.4	25.0	11.4									
			1000 †	304.8	44.0	20.0									
	7401A	3	250 †	76.2	13.0	5.9	.022	.56	.040	1.02	.250	6.35	39	173	
			500 †	152.4	30.0	13.6									
			1000 †	304.8	59.0	26.8									
	7402A	4	250 †	76.2	15.0	6.8	.022	.56	.040	1.02	.275	6.99	52	231	
			500 †	152.4	33.0	15.0									
			1000 †	304.8	64.0	29.1									
	7403A	5	250 †	76.2	17.5	8.0	.022	.56	.040	1.02	.300	7.62	65	289	
			500 †	152.4	38.0	17.3									
			1000 †	304.8	72.0	32.7									
	7404A	7	250 †	76.2	22.0	10.0	.022	.56	.040	1.02	.345	8.76	91	405	
			500 †	152.4	44.5	20.2									
			1000 †	304.8	86.0	39.0									
	7405A	9	250 †	76.2	29.5	13.4	.022	.56	.053	1.35	.410	10.41	117	520	
			500 †	152.4	71.5	32.5									
			1000 †	304.8	144.0	65.4									
	7406A	12	250 †	76.2	30.8	14.0	.022	.56	.053	1.35	.420	10.67	156	693	
			500 †	152.4	88.5	40.2									
			1000 †	304.8	177.0	80.4									
	7407A	18	250 †	76.2	53.5	24.3	.022	.56	.053	1.35	.500	12.70	234	1041	
			500 †	152.4	104.0	47.2									
			1000 †	304.8	208.0	94.4									
Temp Rating: -40° to 90°C (-5° to 90°C flexing)	7408A	25	250 †	76.2	65.3	29.6	.022	.56	.065	1.65	.615	15.62	325	1445	
			500 †	152.4	130.5	59.3									
			1000 †	304.8	261.0	118.6									

**20 AWG** Stranded (10x30) BC Conductors • TC Braid Shield (85% Coverage) • Color Code: Black w/numbers + Green/Yellow ground

**PVC Insulation • PVC Inner Jacket • Gray Oil- and Abrasion-resistant PVC Outer Jacket**

UL AWM Style 2587 (600V 90°C) CSA AWM I/II A/B 	7401AS	3	500 †	152.4	54.0	24.5	.022	.56	Inner:	.320	8.13	45	200
									Outer:	.64			
									.035	.89			
	7402AS	4	250 †	76.2	32.8	14.9	.022	.56	Inner:	.330	8.38	52	231
									Outer:	.64			
									.035	.89			
	7403AS	5	250 †	76.2	34.8	15.8	.022	.56	Inner:	.370	9.40	65	289
									Outer:	.64			
									.035	.89			
	7404AS	7	250 †	76.2	37.8	17.1	.022	.56	Inner:	.420	10.67	91	405
									Outer:	.64			
									.040	1.02			

Temp Rating: -40° to 90°C  
(-5° to 90°C flexing)

BC = Bare Copper • TC = Tinned Copper

\*Based on proper installation techniques in a C-track cable guide.

†Final put-up length may vary ±10% from length shown.

# Belden Infinity® Flexible Automation Cable

600V FCC Control Cables for Moderate Flexing


(1 Million Flex Cycles\*)

Description	Part No.	No. of Cond.	Standard Lengths		Standard Unit Weight		Insulation Thickness		Jacket Thickness		Nominal OD		Maximum Pull Tension	
			Ft.	m	Lbs.	kg	Inch	mm	Inch	mm	Inch	mm	Lbs.	N

**18 AWG** Stranded (16x30) Bare Copper Conductors • Unshielded • Color Code: Black w/numbers + Green/Yellow ground

**PVC Insulation • Gray Oil- and Abrasion-resistant PVC Jacket**

UL AWM Style 2587 (600V 90°C)  
CSA AWM I/II A/B




7409A	2	250 †	76.2	13.3	6.0	.022	.56	.040	1.02	.264	6.71	50	222
		500 †	152.4	26.5	12.0								
		1000 †	304.8	51.0	23.2								
7410A	3	250 †	76.2	16.3	7.4	.022	.56	.040	1.02	.280	7.11	74	329
		500 †	152.4	25.0	11.4								
		1000 †	304.8	48.0	21.8								
7411A	4	250 †	76.2	18.8	8.5	.022	.56	.040	1.02	.305	7.75	98	436
		500 †	152.4	31.0	14.1								
		1000 †	304.8	58.0	26.3								
7412A	5	250 †	76.2	21.8	9.9	.022	.56	.040	1.02	.330	8.38	122	542
		500 †	152.4	36.0	16.3								
		1000 †	304.8	69.0	31.3								
7413A	7	250 †	76.2	27.5	12.5	.022	.56	.040	1.02	.385	9.78	171	760
		500 †	152.4	46.0	20.9								
		1000 †	304.8	120.0	54.5								
7414A	9	250 †	76.2	36.5	16.6	.022	.56	.050	1.27	.452	11.48	220	978
		500 †	152.4	87.0	39.5								
		1000 †	304.8	174.0	79.0								
7415A	12	250 †	76.2	40.0	18.2	.022	.56	.050	1.27	.475	12.07	292	1298
		500 †	152.4	75.5	34.3								
		1000 †	304.8	161.0	73.1								
7416A	18	250 †	76.2	55.8	25.3	.022	.56	.050	1.27	.560	14.22	440	1957
		500 †	152.4	112.5	51.1								
7417A	25	250 †	76.2	74.3	33.7	.022	.56	.072	1.83	.696	17.68	520	2313
		500 †	152.4	149.0	67.6								
7418A	34	250 †	76.2	111.3	50.5	.022	.56	.072	1.83	.788	20.02	830	3692
		500 †	152.4	215.5	97.8								
7419A	41	500 †	152.4	295.0	133.9	.022	.56	.075	1.91	.860	21.84	1001	4453
7420A	50	250 †	76.2	186.5	84.7	.022	.56	.083	2.11	.940	23.88	1220	5427

Temp Rating: -40° to 90°C  
(-5° to 90°C flexing)

**18 AWG** Stranded (16x30) BC Conductors • TC Braid Shield (85% Coverage) • Color Code: Black w/numbers + Green/Yellow ground

**PVC Insulation • PVC Inner Jacket • Gray Oil- and Abrasion-resistant PVC Outer Jacket**

UL AWM Style 2587 (600V 90°C)  
CSA AWM I/II A/B



7411AS	4	250 †	76.2	29.0	13.2	.022	.56	Inner: .025	.64	.365	9.27	83	369
		500 †	152.4	56.5	25.7			Outer: .032	.81				
7413AS	7	250 †	76.2	37.5	17.0	.022	.56	Inner: .025	.64	.450	11.43	145	645
		500 †	152.4	74.0	33.6			Outer: .035	.89				
7415AS	12	250 †	76.2	61.5	27.9	.022	.56	Inner: .025	.64	.550	13.97	230	1023
		500 †	152.4	124.0	56.3			Outer: .045	1.14				
7416AS	18	250 †	76.2	83.3	37.8	.022	.56	Inner: .025	.64	.650	16.51	374	1663
		500 †	152.4	169.0	76.7			Outer: .055	1.40				
7417AS	25	250 †	76.2	113.8	51.6	.022	.56	Inner: .025	.64	.765	19.43	520	2313
		500 †	152.4	228.0	103.5			Outer: .060	1.52				

Temp Rating: -40° to 90°C  
(-5° to 90°C flexing)

BC = Bare Copper • TC = Tinned Copper

\*Based on proper installation techniques in a C-track cable guide.

†Final put-up length may vary ±10% from length shown.

# Belden Infinity® Flexible Automation Cable

600V FCC Control Cables for Moderate Flexing


(1 Million Flex Cycles\*)

Description	Part No.	No. of Cond.	Standard Lengths		Standard Unit Weight		Insulation Thickness		Jacket Thickness		Nominal OD		Maximum Pull Tension	
			Ft.	m	Lbs.	kg	Inch	mm	Inch	mm	Inch	mm	Lbs.	N

**16 AWG** Stranded (26x30) Bare Copper Conductors • Unshielded • Color Code: Black w/numbers + Green/Yellow ground

**PVC Insulation • Gray Oil- and Abrasion-resistant PVC Jacket**

UL AWM Style 2587 (600V 90°C)  
CSA AWM I/II A/B




<b>7421A</b>	2	250 †	76.2	15.0	6.8	.022	.56	.040	1.02	.290	7.37	70	311
		500 †	152.4	35.0	15.9								
		1000 †	304.8	68.0	30.9								
<b>7422A</b>	3	250 †	76.2	18.8	8.5	.022	.56	.040	1.02	.305	7.75	105	467
		500 †	152.4	34.5	15.7								
		1000 †	304.8	65.0	29.5								
<b>7423A</b>	4	250 †	76.2	22.5	10.2	.022	.56	.040	1.02	.330	8.38	140	623
		500 †	152.4	41.5	18.8								
		1000 †	304.8	80.0	36.3								
<b>7424A</b>	5	250 †	76.2	27.5	12.5	.022	.56	.040	1.02	.360	9.14	175	778
		500 †	152.4	49.5	22.5								
		1000 †	304.8	96.0	43.6								
<b>7425A</b>	7	250 †	76.2	35.0	15.9	.022	.56	.040	1.02	.425	10.80	236	1050
		500 †	152.4	64.0	29.1								
		1000 †	304.8	129.0	58.6								
<b>7426A</b>	9	250 †	76.2	50.5	22.9	.022	.56	.060	1.52	.540	13.72	304	1352
		500 †	152.4	95.0	43.1								
		1000 †	304.8	190.0	86.3								
<b>7427A</b>	12	250 †	76.2	55.3	25.1	.022	.56	.065	1.65	.565	14.35	405	1801
		500 †	152.4	114.0	51.8								
		1000 †	304.8	220.0	100.0								
<b>7428A</b>	18	250 †	76.2	79.0	35.9	.022	.56	.065	1.65	.650	16.51	608	2705
		500 †	152.4	158.0	71.7								
<b>7429A</b>	25	250 †	76.2	109.0	49.5	.022	.56	.060	1.52	.750	19.05	875	3892
		500 †	152.4	218.5	99.2								
<b>7430A</b>	34	250 †	76.2	171.3	77.7	.022	.56	.075	1.91	.878	22.30	1145	5093

Temp Rating: -40° to 90°C  
(-5° to 90°C flexing)

**16 AWG** Stranded (26x30) BC Conductors • TC Braid Shield (85% Coverage) • Color Code: Black w/numbers + Green/Yellow ground

**PVC Insulation • PVC Inner Jacket • Gray Oil- and Abrasion-resistant PVC Outer Jacket**

UL AWM Style 2587 (600V 90°C)  
CSA AWM I/II A/B



<b>7423AS</b>	4	250 †	76.2	36.0	16.3	.022	.56	Inner: .025	.64	.400	10.16	140	623
		500 †	152.4	68.0	30.9			Outer: .035	.89				
<b>7427AS</b>	12	250 †	76.2	81.8	37.1	.022	.56	Inner: .025	.64	.630	16.00	420	1868
		500 †	152.4	164.5	74.7			Outer: .060	1.52				
<b>7428AS</b>	18	250 †	76.2	119.0	54.1	.022	.56	Inner: .025	.64	.740	18.80	630	2802
		500 †	152.4	238.5	108.3			Outer: .070	1.78				

Temp Rating: -40° to 90°C  
(-5° to 90°C flexing)

BC = Bare Copper • TC = Tinned Copper

\*Based on proper installation techniques in a C-track cable guide.

†Final put-up length may vary ±10% from length shown.

# Belden Infinity® Flexible Automation Cable


600V FCC Control Cables for Moderate Flexing

(1 Million Flex Cycles\*)

Description	Part No.	No. of Cond.	Standard Lengths		Standard Unit Weight		Insulation Thickness		Jacket Thickness		Nominal OD		Maximum Pull Tension	
			Ft.	m	Lbs.	kg	Inch	mm	Inch	mm	Inch	mm	Lbs.	N

**14 AWG** Stranded (41x30) Bare Copper Conductors • Unshielded • Color Code: Black w/numbers + Green/Yellow ground


**PVC Insulation • Gray Oil- and Abrasion-resistant PVC Jacket**

	UL AWM Style 2587 (600V 90°C) CSA AWM I/II A/B	<b>7434A</b>	2	250 †	76.2	34.0	15.5	.023	.58	.045	1.14	.335	8.51	201	894	
				500 †	152.4	66.5	30.2									
				1000 †	304.8	92.0	41.8									
		<b>7435A</b>	3	250 †	76.2	39.8	18.1	.023	.58	.045	1.14	.350	8.89	201	894	
				500 †	152.4	78.5	35.6									
				1000 †	304.8	98.0	44.5									
		<b>7436A</b>	4	250 †	76.2	49.3	22.4	.023	.58	.050	1.27	.395	10.03	201	894	
				500 †	152.4	95.0	43.1									
				1000 †	304.8	131.0	59.5									
		<b>7438A</b>	7	500 †	152.4	150.5	68.3	.023	.58	.060	1.52	.525	13.33	373	1659	
				500 †	152.4	110.8	50.3	.023	.58	.070	1.78	.620	15.75	480	2135	
																223.0
		<b>7440A</b>	12	250 †	76.2	142.5	64.7	.023	.58	.075	1.91	.660	16.76	640	2847	
				500 †	152.4	285.5	129.6									
				500 †	152.4	285.5	129.6									
		<b>7442A</b>	25	250 †	76.2	223.8	101.7	.023	.58	.090	2.29	.930	23.62	1337	5947	

Temp Rating: -40° to 90°C  
(-5° to 90°C flexing)

**14 AWG** Stranded (41x30) BC Conductors • TC Braid Shield (85% Coverage) • Color Code: Black w/numbers + Green/Yellow ground


**PVC Insulation • PVC Inner Jacket • Gray Oil- and Abrasion-resistant PVC Outer Jacket**

	UL AWM Style 2587 (600V 90°C) CSA AWM I/II A/B	<b>7436AS</b>	4	250 †	76.2	49.3	22.4	.023	.58	Inner: .025		.482	12.24	212	943	
				500 †	152.4	95.0	43.1			Outer: .055		1.40				
		<b>7438AS</b>	7	250 †	76.2	74.8	33.9	.023	.58	Inner: .025		.563	14.30	371	1650	
				500 †	152.4	150.5	68.3			Outer: .060		1.52				

Temp Rating: -40° to 90°C  
(-5° to 90°C flexing)

**12 AWG** Stranded (65x30) Bare Copper Conductors • Unshielded • Color Code: Black w/numbers + Green/Yellow ground


**PVC Insulation • Gray Oil- and Abrasion-resistant PVC Jacket**

	UL AWM Style 2587 (600V 90°C) CSA AWM I/II A/B	<b>7444A</b>	3	250 †	76.2	53.5	24.3	.028	.71	.060	1.52	.450	11.43	253	1125	
				500 †	152.4	103.5	47.0									
		<b>7445A</b>	4	250 †	76.2	63.5	28.8	.028	.71	.070	1.78	.505	12.83	338	1503	
				500 †	152.4	124.0	56.3									

Temp Rating: -40° to 90°C  
(-5° to 90°C flexing)

**12 AWG** Stranded (65x30) BC Conductors • TC Braid Shield (85% Coverage) • Color Code: Black w/numbers + Green/Yellow ground

**PVC Insulation • PVC Inner Jacket • Gray Oil- and Abrasion-resistant PVC Outer Jacket**

	UL AWM Style 2587 (600V 90°C) CSA AWM I/II A/B	<b>7445AS</b>	4	250 †	76.2	85.8	38.9	.028	.71	Inner: .030		.580	14.73	338	1503	
				500 †	152.4	171.5	77.9			Outer: .070		1.78				

Temp Rating: -40° to 90°C  
(-5° to 90°C flexing)

BC = Bare Copper • TC = Tinned Copper

\*Based on proper installation techniques in a C-track cable guide.

†Final put-up length may vary ±10% from length shown.

# Belden Infinity® Flexible Automation Cable

600V FCC Control Cables for Moderate Flexing


(1 Million Flex Cycles\*)

Description	Part No.	No. of Cond.	Standard Lengths		Standard Unit Weight		Insulation Thickness		Jacket Thickness		Nominal OD		Maximum Pull Tension	
			Ft.	m	Lbs.	kg	Inch	mm	Inch	mm	Inch	mm	Lbs.	N

**10 AWG** Stranded (105x30) Bare Copper Conductors • Unshielded (Color Code: Black w/numbers + Green/Yellow ground)

**PVC Insulation • Gray Oil- and Abrasion-resistant PVC Jacket**

UL AWM Style 2587 (600V 90°C)	<b>7447A</b>	4	250 †	76.2	70.8	32.1	.030	.76	.070	1.78	.570	14.48	672	2989
CSA AWM I/II A/B			500 †	152.4	142.5	64.7								




Temp Rating: -40° to 90°C  
(-5° to 90°C flexing)

**10 AWG** Stranded (105x30) BC Conductors • TC Braid Shield (85% Coverage) • Color Code: Black w/numbers + Green/Yellow ground

**PVC Insulation • PVC Inner Jacket • Gray Oil- and Abrasion-resistant PVC Outer Jacket**

UL AWM Style 2587 (600V 90°C)	<b>7447AS</b>	4	250 †	76.2	92.8	42.2	.030	.76	Inner:	.660	16.76	546	2429
CSA AWM I/II A/B			500 †	152.4	185.5	84.3			Outer:	.035	.89		
										.065	1.65		




Temp Rating: -40° to 90°C  
(-5° to 90°C flexing)

**8 AWG** Stranded (168x30) Bare Copper Conductors • Unshielded • Color Code: Black w/numbers + Green/Yellow ground

**PVC Insulation • Gray Oil- and Abrasion-resistant PVC Jacket**

UL AWM Style 2587 (600V 90°C)	<b>7450A</b>	4	250 †	76.2	113.8	51.6	.045	1.14	.070	1.78	.715	18.16	920	4092
CSA AWM I/II A/B			500 †	152.4	228.0	103.5								




Temp Rating: -40° to 90°C  
(-5° to 90°C flexing)

**8 AWG** Stranded (168x30) BC Conductors • TC Braid Shield (85% Coverage) • Color Code: Black w/numbers + Green/Yellow ground

**PVC Insulation • PVC Inner Jacket • Gray Oil- and Abrasion-resistant PVC Outer Jacket**

UL AWM Style 2587 (600V 90°C)	<b>7450AS</b>	4	250 †	76.2	141.3	64.1	.045	1.14	Inner:	.815	20.70	872	3879
CSA AWM I/II A/B			500 †	152.4	281.0	127.6			Outer:	.040	1.02		
										.065	1.65		




Temp Rating: -40° to 90°C  
(-5° to 90°C flexing)

**6 AWG** Stranded (266x30) Bare Copper Conductors • Unshielded • Color Code: Black w/numbers + Green/Yellow ground

**PVC Insulation • Gray Oil- and Abrasion-resistant PVC Jacket**

UL AWM Style 2587 (600V 90°C)	<b>7453A</b>	4	250 †	76.2	185.0	84.0	.060	1.52	.085	2.16	.925	23.50	1472	6548
CSA AWM I/II A/B														



Temp Rating: -40° to 90°C  
(-5° to 90°C flexing)

BC = Bare Copper • TC = Tinned Copper

\*Based on proper installation techniques in a C-track cable guide.


†Final put-up length may vary ±10% from length shown.



# Belden Infinity® Flexible Automation Cable

300V Flex Data Cables

(1 Million Flex Cycles\*)

Description	Part No.	No. of Pairs	UL NEC/ C(UL) CEC Type	RS Type	Color Code	Standard Lengths		Standard Unit Weight		Nominal OD		Maximum Capacitance		Nom. Imped. (Ω)
						Ft.	m	Lbs.	kg	Inch	mm	pF/Ft.	pF/m	
<b>Flex Data • 24 AWG</b> Stranded (41x40) BC Condrs. • Twisted Pairs • Overall Beldfoil® (100% Coverage) + TC Braid Shield (85% Coverage)**														
<b>Foam Polyethylene Insulation with Skin • Green Oil-resistant PVC Jacket</b>														
	7200A	1	NEC: CM CEC: CM	232 485	White, Blue	500 1000	152.4 304.8	17.0 38.0	7.7 17.3	.240	6.10	15.0	49.2	120
	7201A	2	NEC: CM CEC: CM	232 485	See Color Code Chart (below)	500 1000	152.4 304.8	31.0 60.0	14.1 27.2	.322	8.18	15.0	49.2	120
	7202A	3	NEC: CM CEC: CM	232 485	See Color Code Chart (below)	500 1000	152.4 304.8	33.5 68.0	15.2 30.9	.347	8.81	15.0	49.2	120
	7203A	4	NEC: CM CEC: CM	232 485	See Color Code Chart (below)	500 1000	152.4 304.8	39.0 79.0	17.7 35.9	.362	9.20	15.0	49.2	120
	7205A	1	NEC: CM CEC: CM	232 422	White, Blue	500 1000	152.4 304.8	17.5 38.0	7.9 17.3	.232	5.89	14.0	45.9	100
	7206A	1	NEC: CM CEC: CM	232 485	White, Blue	1000	304.8	59.0	26.8	.302	7.67	10.0	32.8	150

Temp Rating: -20° to 60°C (-5° to 60°C flexing)

BC = Bare Copper • TC = Tinned Copper

\*Based on proper installation techniques in a C-track cable guide.

\*\*24 AWG stranded (41x40) tinned copper drain wire.

### Color Codes: Flex Data

Pair No.	Color Combination
1	White/Blue Stripe & Blue/White Stripe
2	White/Orange Stripe & Orange/White Stripe
3	White/Green Stripe & Green/White Stripe
4	White/Brown Stripe & Brown/White Stripe

# Belden Infinity® Flexible Automation Cable

## 75 Ohm Flex Vision Coax Cables


(1 Million Flex Cycles\*)

Description	Part No.	UL NEC/ C(UL) CEC Type	Standard Lengths		Standard Unit Weight		Nom. DCR		Nominal Core OD		Nominal OD		Nom. Imp. (Ω)	Nom. Vel. of Prop.	Nominal Capacitance		Nominal Attenuation		
			Ft.	m	Lbs.	kg	Conductor	Shield	Inch	mm	Inch	mm			pF/Ft.	pF/m	MHz	dB/100 Ft.	dB/100m

**Sub-Mini Type • 30 AWG** Stranded (7x38) Tinned Cadmium Bronze Conductor • Tinned Copper “French Braid” Shield (95% Coverage)

**Foam Polyethylene Insulation • Matte Blue Belflex® Jacket**

UL AWM	<b>7500A</b>	CEC:	250†	76.2	3.0	1.4	108.0Ω/M'	13.3Ω/M'	.056	1.42	.110	2.79	75	78%	16.7	54.8	2.2	.9	2.95
Style 1354		FT1	500†	152.4	5.0	2.3	354.3Ω/km	43.6Ω/km									5	1.4	4.59
30V 80°C			1000†	304.8	9.0	4.1											10	2.0	6.56
CSA AWM I/II A/B																	30	3.4	11.16
																	50	4.4	14.44
																	100	6.4	21.00



**Mini Type • 25 AWG** Stranded (19x38) Bare Copper Conductor • Tinned Copper “French Braid” Shield (95% Coverage)

**Foam Polyethylene Insulation • Matte Blue Belflex Jacket**

UL AWM	<b>7501A</b>	CEC:	500†	152.4	7.5	3.4	35.0Ω/M'	9.1Ω/M'	.090	2.29	.146	3.71	75	77%	17.7	58.1	2.2	.6	1.97
Style 1354		FT1	1000†	304.8	14.0	6.4	114.8Ω/km	29.9Ω/km									5	.9	2.95
30V 80°C																	10	1.3	4.27
CSA AWM I/II A/B																	30	2.2	7.22
																	50	2.9	9.52
																	100	4.2	13.78



**RG-59 Type • 22 AWG** Stranded (19x34) Bare Copper Conductor • Tinned Copper “French Braid” Shield (95% Coverage)

**Foam Polyethylene Insulation • Matte Blue Belflex Jacket**

UL AWM	<b>7502A</b>	CEC:	250†	76.2	10.5	4.8	13.4Ω/M'	6.4Ω/M'	.146	3.71	.242	6.15	75	79%	18.0	59.1	2.2	.4	1.31
Style 1354		FT1	500†	152.4	15.0	6.8	44.0Ω/km	21.0Ω/km									5	.5	1.64
30V 80°C			1000†	304.8	34.0	15.4											10	.8	2.63
CSA AWM I/II A/B																	30	1.4	4.59
																	50	1.8	5.91
																	100	2.7	8.86



**RG-6/U Type • 20 AWG** Stranded (7x15x40) Bare Copper Conductor • Tinned Copper “French Braid” Shield (95% Coverage)

**Foam Polyethylene Insulation • Matte Blue Belflex Jacket**

UL AWM	<b>7503A</b>	CEC:	250†	76.2	12.0	5.5	8.1Ω/M'	11.0Ω/M'	.185	4.70	.275	6.99	75	80%	17.3	56.8	2.2	.3	0.98
Style 1354		FT1	500†	152.4	18.0	8.2	26.6Ω/km	36.1Ω/km									5	.4	1.31
30V 80°C			1000†	304.8	40.0	18.2											10	.6	1.97
CSA AWM I/II A/B																	30	1.1	3.61
																	50	1.5	4.92
																	100	2.2	7.22



**RG-11 Type • 16 AWG** Stranded (7x37x40) Bare Copper Conductor • Tinned Copper “French Braid” Shield (95% Coverage)

**Foam Polyethylene Insulation • Matte Blue Belflex Jacket**

UL AWM	<b>7504A</b>	CEC:	1000†	304.8	84.0	38.1	3.5Ω/M'	3.6Ω/M'	.285	7.24	.405	10.29	75	81%	17.3	56.8	2.2	.2	0.66
Style 1354		FT1					11.5Ω/km	11.8Ω/km									5	.3	0.98
30V 80°C																	10	.4	1.31
CSA AWM I/II A/B																	30	.8	2.63
																	50	1.0	3.28
																	100	1.5	4.92



BC = Bare Copper • DCR = DC Resistance • TC = Tinned Copper

\*Based on proper installation techniques in a C-track cable guide.

†Final put-up length may vary ±10% from length shown.

# UL Instrumentation Cable

## 300V Power-Limited Tray Cables — Overview

### Construction

Soft annealed bare or tinned copper with PVC flame retardant insulation and jacket. Other insulation and jacket options are available (see table below). Communication wire included on all multi-pair/multi-triad 1000 and 3000 series part numbers, 22 AWG (7x30) bare copper, orange PVC insulation. Nylon rip cord included in all PVC/PVC instrumentation cables.

### Other Construction Options:

UL Listed for PLTC	
Insulation/Jacket	Max. Temp Rating
XLPE/PVC	90°C
XLPE/CPE	90°C
PVC/PVC	105°C
PVC/CPE	105°C
PE/PVC	75°C
FPE/PVC	75°C
TPE/TPE	105°C
XLPE/Haloarrest®	90°C

### Armoring Capabilities

Belden also has the capability to protect electronic, instrumentation and control cables with interlocking or continuous armor and smooth or corrugated protective metal tapes.

To Specify Part Number		
<b>1</b>	<b>2</b>	<b>3456</b>
Overall Jacket Type	Armor Type	Core Trade Number

### Overall Jacket

Code	Material
1	PVC
3	CPE
4	TPE
5	HDPE
6	Oil Res II
7	Haloarrest® I

### Armor

Code	Material
2	Aluminum Interlock
3	Steel Interlock
8	Continuously Corrugated Aluminum

### Application

Cable jackets are resistant to sunlight, moisture and vapor penetration. PVC/PVC constructions, with 3 conductors or more and 20 AWG or larger, are suitable for direct burial.

### Unshielded

Twisted non-shielded pairs and triads provide a minimal OD allowing greater tray and conduit fill. Non-shielded instrument pairs may be utilized when recommended by the instrument manufacturer and used in a metallic conduit.

### Overall Shield

Recommended for use in instrumentation applications where signals are transmitted in excess of 100 millivolts except in areas where high voltage and current sources create excessive noise interference. The Beldfoil® shield with drain wire provides 100% coverage for maximum shield effectiveness.

### Individually Shielded and Overall Shielded

Individually shielded pairs or triads with an overall shield are recommended for use in instrumentation applications where optimum noise rejection is required. Individual pair/triad shields are fully isolated from each other and contain a separate drain wire for grounding, to provide maximum protection from crosstalk and common mode interference. Cables with an overall shield provide additional electrostatic noise protection.

### Specifications

- UL Subject 13
- UL Subject 2250
- NEC Article 725 Class 2 and Class 3 Circuits
- NEC Type PLTC Listed, which is approved for cable tray use in Class 1, Division 2, hazardous areas and non-hazardous areas, cable trays, raceways, conduit and supported by messenger wires.
- Sunlight-resistant.
- Oil-resistant per UL Class 43
- NEC Type ITC per Article 727. ITC cables may carry up to 5 amps at 150V, which is significantly greater than that allowed for PLTC only cables. ITC cables may also be installed in specific applications, per the NEC, in addition to those allowed for PLTC.
- UL 1685 (UL 1581) Vertical Tray Flame Test comparable to IEEE 383-1974 (70,000 BTU/hr.) Flame Test.
- PVC/PVC constructions are CMG, FT4, IEEE 1202 and IEEE 383-2003 rated, and meet ICEA T-29-520 Flame Test.
- Design options — call 1-800-BELDEN-1 or 1-800-BELDEN-3.

### PLTC-ER

As an option, Belden offers all PVC insulated, PVC jacketed instrumentation cables, and several other insulation and jackets, with a PLTC-ER (Exposed Run) rating, formerly referred to as Open Wiring.

Per NEC Article 725, a PLTC-ER rated cable may be installed in an industrial establishment between a cable tray and the utilization equipment or device. A PLTC-ER rated cable must meet the crush and impact requirements of UL Type MC cable. By eliminating the need for metal conduit and/or armor, using a PLTC-ER rated cable results in savings in both installation and maintenance.

Standard lengths may be subject to tolerance. Custom lengths may be available upon request. Contact the Belden Electronics Division Customer Service Department for additional information. 1-800-BELDEN-1 or 1-800-BELDEN-3.

# UL Instrumentation Cable

## 300V Power-Limited Tray Cables


### Industrial Grade Sunlight- and Oil-Resistant Jackets

Description	Part No.	No. of Pairs	Color Code	Standard Lengths		Standard Unit Weight		Jacket Thickness		Nominal OD		Maximum Pull Tension		Minimum Bend Radius	
				Ft.	m	Lbs.	kg	Inch	mm	Inch	mm	Lbs.	N	Inch	mm

**22 AWG Pairs** Stranded (7x30) Tinned Copper Conductors • Twisted Pairs


**Unshielded • PVC Insulation • Chrome PVC Jacket**

NEC: PLTC, ITC, CMG CEC: CMG FT4 IEEE 1202/383 ICEA T-29-520	<b>9407</b>	1	E2	U-500 U-1000	U-152.4 U-304.8	10.0 19.0	4.3 8.2	.037	.94	.198	5.03	19	84	2.00	50.80
---	-------------	---	----	-----------------	--------------------	--------------	------------	------	-----	------	------	----	----	------	-------



**Overall Beldfoil® Shield (100% Coverage) • PVC Insulation • Chrome PVC Jacket**


NEC: PLTC, ITC, CMG CEC: CMG FT4 IEEE 1202/383 ICEA T-29-520	<b>9322</b>	1	E2	U-500 U-1000	U-152.4 U-304.8	11.0 22.0	5.0 10.0	.037	.94	.201	5.10	28	124	2.00	50.80
	<b>9512</b>	2	E2	500 1000	152.4 304.8	22.0 42.0	10.0 19.1	.042	1.07	.310	7.82	46	204	3.00	76.20
	<b>9513</b>	3	E2	500 1000	152.4 304.8	26.5 51.0	11.6 23.2	.042	1.07	.324	8.23	63	280	3.25	82.55
	<b>9514</b>	4	E2	500 1000	152.4 304.8	33.0 67.0	14.8 30.5	.042	1.07	.356	9.04	80	355	3.50	88.90
	<b>9516</b>	6	E2	500 1000	152.4 304.8	45.0 89.0	20.4 40.4	.053	1.35	.418	10.62	118	524	4.25	107.95
	<b>9520</b>	9	E2	500 1000	152.4 304.8	64.5 121.0	29.3 55.0	.053	1.35	.482	12.29	172	765	4.75	120.65
	<b>9521</b>	11	E2	500 1000	152.4 304.8	73.0 147.0	32.7 66.4	.053	1.35	.506	12.85	200	889	5.35	135.89
	<b>9524</b>	15	E2	500 1000	152.4 304.8	89.5 178.0	40.7 80.9	.053	1.35	.594	15.09	280	1245	6.00	152.40
	<b>9526</b>	19	E2	500 1000	152.4 304.8	114.5 224.0	52.0 101.8	.063	1.60	.644	16.36	350	1557	6.33	160.78
	<b>9527</b>	27	E2	500 1000 †	152.4 304.8	156.5 321.0	71.1 145.9	.063	1.60	.763	19.38	500	2224	7.50	190.50



**22 AWG Pairs** Stranded (7x30) Bare Copper Conductors\* • Twisted Pairs

**Overall Beldfoil Shield (100% Coverage) • PVC Insulation • PVC Jacket (Black or Chrome)**

NEC: PLTC, ITC, CMG CEC: CMG FT4 IEEE 1202/383 ICEA T-29-520	<b>3000A**</b>	2	E1	Bulk††	Bulk	—	—	.043	1.09	.310	7.87	46	204	3.00	76.20
	<b>3004A**</b>	4	E1	Bulk††	Bulk	—	—	.042	1.07	.357	9.01	80	355	3.50	88.90
	<b>3006A**</b>	8	E1	Bulk††	Bulk	—	—	.053	1.35	.450	11.43	172	765	4.75	120.65
	<b>3008A**</b>	12	E1	Bulk††	Bulk	—	—	.053	1.35	.536	13.61	210	934	5.00	127.00
	<b>3010A**</b>	16	E1	Bulk††	Bulk	—	—	.053	1.35	.594	15.09	290	1290	6.00	152.40
	<b>3012A**</b>	24	E1	Bulk††	Bulk	—	—	.065	1.65	.749	19.02	440	1957	7.50	190.50
	<b>3014A**</b>	50	E1	Bulk††	Bulk	—	—	.075	1.91	1.017	25.80	915	4070	9.50	241.30



PVC = Polyvinyl Chloride

\*For tinned copper conductors, order with B suffix.

\*\*For Exposed Run rated cable (3000 series only), order with E suffix, e.g. 3000AE.

†Final put-up length may vary ±10% from length shown.

††Bulk = Check length available for specific construction.

E1, E2 = Refer to Industrial Technical Information section for color code. Alternate color coding available upon request.

Multiple pair or triad cables have each pair/triad numbered for ease of identification.



# UL Instrumentation Cable


## 300V Power-Limited Tray Cables

### Industrial Grade Sunlight- and Oil-Resistant Jackets

Description	Part No.	No. of Pairs/Triads	Color Code	Standard Lengths		Standard Unit Weight		Jacket Thickness		Nominal OD		Maximum Pull Tension		Minimum Bend Radius	
				Ft.	m	Lbs.	kg	Inch	mm	Inch	mm	Lbs.	N	Inch	mm


**22 AWG Pairs Stranded (7x30) Tinned Copper Conductors • Twisted Pairs**

Individually Shielded • PVC Insulation • Chrome PVC Jacket															
NEC: PLTC, ITC, CMG CEC: CMG FT4 IEEE 1202/383 ICEA T-29-520	9328	2	E2	500	152.4	23.5	10.2	.042	1.07	.323	8.20	54	240	3.00	76.20
				1000	304.8	46.0	20.9								
	9329	3	E2	500	152.4	29.5	13.4	.042	1.07	.341	8.66	54	240	3.50	88.90
				1000	304.8	60.0	27.3								
	9330	4	E2	500	152.4	39.0	17.7	.042	1.07	.372	9.45	110	489	3.50	88.90
				1000	304.8	75.0	34.0								
	9331	6	E2	500	152.4	55.0	24.5	.053	1.35	.457	11.61	101	449	4.33	109.98
				1000	304.8	111.0	50.4								
	9332	9	E2	500	152.4	75.0	34.1	.053	1.35	.530	13.46	160	711	5.00	127.00
				1000	304.8	145.0	65.9								
	9333	11	E2	500	152.4	89.0	40.5	.053	1.35	.592	15.04	160	711	5.50	139.70
				1000	304.8	177.0	80.5								
	9335	19	E2	500	152.4	141.5	64.3	.063	1.60	.711	18.06	264	1174	6.50	165.10
				1000	304.8	287.0	130.5								




**22 AWG Pairs Stranded (7x30) Bare Copper Conductors\* • Twisted Pairs**

Individually Shielded + Overall Beldfoil® Shield (100% Coverage) • PVC Insulation • PVC Jacket (Black or Chrome)															
NEC: PLTC, ITC, CMG CEC: CMG FT4 IEEE 1202/383 ICEA T-29-520	3001A <sup>†</sup>	2	E1	Bulk <sup>††</sup>	Bulk	—	—	.042	1.07	.324	8.23	54	240	3.25	82.55
	3005A <sup>†</sup>	4	E1	Bulk <sup>††</sup>	Bulk	—	—	.043	1.09	.360	9.14	115	511	3.50	88.90
	3007A <sup>†</sup>	8	E1	Bulk <sup>††</sup>	Bulk	—	—	.053	1.35	.497	12.62	250	1112	5.25	133.35
	3009A <sup>†</sup>	12	E1	Bulk <sup>††</sup>	Bulk	—	—	.053	1.35	.570	14.48	300	1334	5.75	146.05
	3011A <sup>†</sup>	16	E1	Bulk <sup>††</sup>	Bulk	—	—	.064	1.63	.674	17.12	350	1557	6.25	158.75
	3013A <sup>†</sup>	24	E1	Bulk <sup>††</sup>	Bulk	—	—	.065	1.65	.800	20.32	540	2402	8.00	203.20
	3015A <sup>†</sup>	50	E1	Bulk <sup>††</sup>	Bulk	—	—	.075	1.91	1.050	26.67	1330	5916	10.50	266.70




**22 AWG Triads Stranded (7x30) Tinned Copper Conductors • Twisted Triads**

Unshielded • PVC Insulation • Chrome PVC Jacket															
NEC: PLTC, ITC, CMG CEC: CMG FT4 IEEE 1202/383 ICEA T-29-520	9491	1	E1	U-500	U-152.4	12.5	5.7	.037	.94	.208	5.28	29	129	2.00	50.80
				U-1000	U-304.8	23.0	10.4								




Overall Beldfoil Shield (100% Coverage) • PVC Insulation • Chrome PVC Jacket															
NEC: PLTC, ITC, CMG CEC: CMG FT4 IEEE 1202/383 ICEA T-29-520	9363	1	E1	U-500	U-152.4	13.5	6.1	.037	.94	.208	5.28	29	129	2.00	50.80
				U-1000	U-304.8	26.0	11.8								




**22 AWG Triads Stranded (7x30) Bare Copper Conductors\* • Twisted Triads**

Overall Beldfoil Shield (100% Coverage) • PVC Insulation • PVC Jacket (Black or Chrome)															
NEC: PLTC, ITC, CMG CEC: CMG FT4 IEEE 1202/383 ICEA T-29-520	3002A	2	E1	Bulk <sup>††</sup>	Bulk	—	—	.043	1.09	.330	8.38	62	275	3.50	88.90



For Exposed Run rated cable, order 3002AE

Individually Shielded + Overall Beldfoil Shield (100% Coverage) • PVC Insulation • PVC Jacket (Black or Chrome)															
NEC: PLTC, ITC, CMG CEC: CMG FT4 IEEE 1202/383 ICEA T-29-520	3003A	2	E1	Bulk <sup>††</sup>	Bulk	—	—	.043	1.09	.330	8.38	82	364	3.25	82.55



For Exposed Run rated cable, order 3003AE

\*For tinned copper conductors, order with B suffix.

†For Exposed Run rated 3000 series cables, order with "E" suffix, e.g. 3001AE.

E1, E2 = Refer to Technical Information section for color code. Alternate color coding available upon request.

Multiple pair or triad cables have each pair/triad numbered for ease of identification.

††Bulk = Check length available for specific construction.



For more information, contact Belden Technical Support: 1-800-BELDEN-1 • www.belden.com



# UL Instrumentation Cable

## 300V Power-Limited Tray Cables

### Industrial Grade Sunlight- and Oil-Resistant Jackets

Description	Part No.	No. of Pairs	Color Code	Standard Lengths		Standard Unit Weight		Jacket Thickness		Nominal OD		Maximum Pull Tension		Minimum Bend Radius	
				Ft.	m	Lbs.	kg	Inch	mm	Inch	mm	Lbs.	N	Inch	mm

**20 AWG Pairs** Stranded (19x32) Tinned Copper Conductors • Twisted Pairs

**Unshielded • PVC Insulation • Chrome PVC Jacket**

NEC: PLTC, ITC, CMG CEC: CMG FT4 IEEE 1202/383 ICEA T-29-520	<b>9408</b>	1	E2	U-500 U-1000	304.8 U-304.8	12.0 23.0	5.5 10.4	.037	.94	.214	5.44	31	138	2.00	50.80
---	-------------	---	----	-----------------	------------------	--------------	-------------	------	-----	------	------	----	-----	------	-------



Rip Cord

**Overall Beldfoil® Shield (100% Coverage) • PVC Insulation • Chrome PVC Jacket**

NEC: PLTC, ITC, CMG CEC: CMG FT4 IEEE 1202/383 ICEA T-29-520	<b>9320</b>	1	E2	U-500 U-1000	304.8 U-304.8	14.5 28.0	6.6 12.7	.037	.94	.217	5.51	40	178	2.00	50.80
---	-------------	---	----	-----------------	------------------	--------------	-------------	------	-----	------	------	----	-----	------	-------




Rip Cord  
Drain Wire

**20 AWG Pairs** Stranded (7x28) Bare Copper Conductors • Twisted Pairs

**Overall Beldfoil Shield (100% Coverage) • PVC Insulation • Black PVC Jacket** (See chart below for other options)

NEC: PLTC, ITC, CMG CEC: CMG FT4 IEEE 1202/383 ICEA T-29-520	<b>1033A</b>	1	E1	1000 10000 †	304.8 3048.0	30.0 270.0	13.6 122.5	.037	.94	.213	5.41	42	187	2.25	57.15
	<b>3016A</b>	2	E1	Bulk ††	Bulk	—	—	.042	1.07	.332	8.43	92	409	3.75	95.25
	<b>1056A</b>	4	E1	10000 †	3048.0	820.0	372.0	.053	1.35	.408	10.36	135	601	4.25	107.95
	<b>1057A</b>	8	E1	10000 †	3048.0	1410.0	640.2	.053	1.35	.472	11.99	247	1099	5.00	127.00
	<b>1058A</b>	12	E1	7500 †	2286.0	1455.0	660.0	.053	1.35	.564	14.33	359	1597	6.00	152.40
	<b>1059A</b>	16	E1	5000 †	1524.0	1275.0	578.9	.064	1.63	.649	16.48	232	1032	6.50	165.10
	<b>1060A</b>	24	E1	5000 †	1524.0	1735.0	787.7	.064	1.63	.786	19.96	695	3092	8.25	209.55
	<b>1061A</b>	36	E1	2500 †	762.0	1300.0	590.2	.074	1.88	.960	24.38	1031	4587	10.00	254.00
	<b>1062A</b>	50	E1	2500 †	762.0	1825.0	827.8	.074	1.88	1.117	28.37	1423	6330	11.50	292.10



Rip Cord  
Drain Wire  
Communication Wire

**Individually Shielded + Overall Beldfoil Shield (100% Coverage) • PVC Insulation • Black PVC Jacket** (Other options below)

NEC: PLTC, ITC, CMG CEC: CMG FT4 IEEE 1202/383 ICEA T-29-520	<b>1075A</b>	2	E1	10000 †	3048.0	650.0	294.8	.042	1.07	.337	8.56	97	432	3.75	95.25
	<b>1076A</b>	4	E1	7500 †	2286.0	787.5	357.5	.053	1.35	.411	10.44	171	761	4.50	114.30
	<b>1077A</b>	8	E1	7500 †	2286.0	1297.5	588.6	.053	1.35	.514	13.06	320	1424	5.50	139.70
	<b>1078A</b>	12	E1	7500 †	2286.0	1942.5	881.1	.064	1.63	.637	16.18	468	2082	6.75	171.45
	<b>1079A</b>	16	E1	5000 †	1524.0	1555.0	705.4	.064	1.63	.704	17.88	617	2745	7.50	190.50
	<b>1091A</b>	20	E1	Bulk ††	Bulk	—	—	.064	1.63	.780	19.81	765	3403	8.25	209.55
	<b>1080A</b>	24	E1	2500 †	762.0	1142.5	518.2	.074	1.88	.863	21.92	914	4066	9.00	228.60
	<b>1081A</b>	36	E1	2000 †	609.6	1436.0	651.9	.074	1.88	1.035	26.29	1359	6046	10.50	266.70
	<b>1082A</b>	50	E1	2000 †	609.6	1858.0	843.5	.074	1.88	1.215	30.86	1878	8355	12.75	323.85

F-R = Flame-retardant

†Final put-up length may vary ±10% from length shown.

††Bulk = Check length available for specific construction.

E1, E2 = Refer to Technical Information section for color code.

Alternate color coding available upon request.

Multiple pair or triad cables have each pair/triad numbered for ease of identification.

**Conductor, Insulation and Jacket Options\*\***

To Specify:			Bare	Tinned	Insulation/Jacket
<b>1234</b>	<b>A</b>	<b>E</b>	<b>A</b>	<b>B</b>	PVC/PVC
Start with Part No.	Add or replace letter code for desired conductor, insulation & jacket	Add for Exposed Run rating if desired			
			<b>C</b>	<b>D</b>	XLPE/PVC
			<b>K</b>	<b>L</b>	TPE/TPE
			<b>Q</b>	<b>R</b>	XLPE/CPE
			<b>S</b>	<b>T</b>	XLPE/Haloarrest®

\*\*For 1000 and 3000 Series cables only.



# UL Instrumentation Cable

## 300V Power-Limited Tray Cables


### Industrial Grade Sunlight- and Oil-Resistant Jackets

Description	Part No.	No. of Triads	Color Code	Standard Lengths		Standard Unit Weight		Jacket Thickness		Nominal OD		Maximum Pull Tension		Minimum Bend Radius	
				Ft.	m	Lbs.	kg	Inch	mm	Inch	mm	Lbs.	N	Inch	mm

**20 AWG Triads Stranded (19x32) Tinned Copper Conductors • Twisted Triads**


**Unshielded • PVC Insulation • Chrome PVC Jacket**

NEC: PLTC, ITC, CMG CEC: CMG FT4 IEEE 1202/383 ICEA T-29-520	<b>9492</b>	1	E1	U-500 U-1000	U-152.4 U-304.8	15.5 29.0	7.0 13.2	.037	.94	.225	5.72	46	205	2.25	57.15
---	-------------	---	----	-----------------	--------------------	--------------	-------------	------	-----	------	------	----	-----	------	-------



**Overall Beldfoil® Shield (100% Coverage) • PVC Insulation • Chrome PVC Jacket**


NEC: PLTC, ITC, CMG CEC: CMG FT4 IEEE 1202/383 ICEA T-29-520	<b>9364</b>	1	E1	U-500 U-1000	U-152.4 U-304.8	17.0 32.0	7.7 14.5	.037	.94	.228	5.79	46	205	2.25	57.15
---	-------------	---	----	-----------------	--------------------	--------------	-------------	------	-----	------	------	----	-----	------	-------



**20 AWG Triads Stranded (7x28) Bare Copper Conductors • Twisted Triads**


**Overall Beldfoil Shield (100% Coverage) • PVC Insulation • Black PVC Jacket (See chart below for other options)**

NEC: PLTC, ITC, CMG CEC: CMG FT4 IEEE 1202/383 ICEA T-29-520	<b>1526A</b>	1	E1	10000 <sup>†</sup>	3048.0	310.0	140.6	.037	.94	.215	5.46	42	187	2.20	55.88
	<b>3017A</b>	2	E1	Bulk <sup>††</sup>	Bulk	—	—	.055	1.40	.360	9.14	97	432	3.60	91.44
	<b>3020A</b>	4	E1	Bulk <sup>††</sup>	Bulk	—	—	.055	1.40	.470	11.94	174	774	4.75	120.65
	<b>3021A</b>	8	E1	Bulk <sup>††</sup>	Bulk	—	—	.055	1.40	.560	14.22	330	1468	5.00	127.00
	<b>3022A</b>	12	E1	Bulk <sup>††</sup>	Bulk	—	—	.066	1.68	.710	18.03	485	2158	7.00	177.80
	<b>3023A</b>	16	E1	Bulk <sup>††</sup>	Bulk	—	—	.064	1.63	.821	20.85	600	2669	7.75	196.85
	<b>3024A</b>	24	E1	Bulk <sup>††</sup>	Bulk	—	—	.074	1.88	1.031	26.19	920	4093	9.25	234.95



**Individually Shielded + Overall Beldfoil Shield (100% Coverage) • PVC Insulation • Black PVC Jacket (Other options below)**

NEC: PLTC, ITC, CMG CEC: CMG FT4 IEEE 1202/383 ICEA T-29-520	<b>3018A</b>	2	E1	Bulk <sup>††</sup>	Bulk	—	—	.055	1.40	.372	9.45	102	454	3.75	95.25
	<b>1083A</b>	4	E1	10000 <sup>†</sup>	3048.0	1410.8	640.9	.053	1.35	.451	11.46	228	1014	4.50	114.30
	<b>1084A</b>	8	E1	7500 <sup>†</sup>	2286.0	1755.0	796.1	.064	1.63	.575	10.81	432	1922	5.75	146.05
	<b>1085A</b>	12	E1	5000 <sup>†</sup>	1524.0	1735.0	787.0	.064	1.63	.714	18.14	636	2829	7.15	181.61
	<b>1092A</b>	16	E1	Bulk <sup>††</sup>	Bulk	—	—	.064	1.63	.793	20.14	841	3741	7.90	200.66
	<b>1086A</b>	24	E1	2500 <sup>†</sup>	762.0	1602.5	726.9	.074	1.88	.992	25.20	1250	5561	9.90	251.46
	<b>3067A</b>	36	E1	Bulk <sup>††</sup>	Bulk	—	—	.074	1.88	1.292	32.82	1875	6273	13.00	330.20



<sup>†</sup>Final put-up length may vary ±10% from length shown.  
<sup>††</sup>Bulk = Check length available for specific construction.

E1 = Refer to Technical Information section for color code.  
Alternate color coding available upon request.

Multiple pair or triad cables have each pair/triad numbered for ease of identification.

**Conductor, Insulation and Jacket Options\*\***

To Specify:		
<b>1234</b>	<b>A</b>	<b>E</b>
Start with Part No.	Add or replace letter code for desired conductor, insulation & jacket	Add for Exposed Run rating if desired

Bare	Tinned	Insulation/Jacket
<b>A</b>	<b>B</b>	PVC/PVC
<b>C</b>	<b>D</b>	XLPE/PVC
<b>K</b>	<b>L</b>	TPE/TPE
<b>Q</b>	<b>R</b>	XLPE/CPE
<b>S</b>	<b>T</b>	XLPE/Haloarrest®

\*\*For 1000 and 3000 Series cables only.



# UL Instrumentation Cable

## 300V Power-Limited Tray Cables


### Industrial Grade Sunlight- and Oil-Resistant Jackets

Description	Part No.	No. of Pairs	Color Code	Standard Lengths		Standard Unit Weight		Jacket Thickness		Nominal OD		Maximum Pull Tension		Minimum Bend Radius	
				Ft.	m	Lbs.	kg	Inch	mm	Inch	mm	Lbs.	N	Inch	mm

**18 AWG Pairs** Stranded (19x30) Tinned Copper Conductors • Twisted Pairs


**Unshielded • PVC Insulation • Chrome PVC Jacket**

NEC: PLTC, ITC, CMG CEC: CMG FT4 IEEE 1202/383 ICEA T-29-520	<b>9409</b>	1	E2	U-500 U-1000	U-152.4 U-304.8	15.0 28.0	6.8 12.7	.037 .94	.230 5.84	49 218	2.25 57.15
---	-------------	---	----	-----------------	--------------------	--------------	-------------	-------------	--------------	-----------	---------------




**Overall Beldfoil® Shield (100% Coverage) • PVC Insulation • Chrome PVC Jacket**

NEC: PLTC, ITC, CMG CEC: CMG FT4 IEEE 1202/383 ICEA T-29-520	<b>9318</b>	1	E2	U-500 U-1000	U-152.4 U-304.8	17.5 33.0	7.9 15.0	.037 .94	.233 5.92	60 267	2.25 57.15
	<b>9552</b>	2	E2	500 1000	152.4 304.8	35.5 69.0	16.1 31.4	.042 1.07	.368 9.34	65 289	3.70 93.98
	<b>9553</b>	3	E2	500 1000	152.4 304.8	49.5 98.0	22.0 49.4	.053 1.35	.411 10.44	145 645	4.10 104.14
	<b>9554</b>	4	E2	500 1000	152.4 304.8	57.0 112.0	25.8 50.8	.053 1.35	.447 11.35	187 832	4.50 114.30
	<b>9556</b>	6	E2	500 1000	152.4 304.8	78.5 153.0	35.7 69.5	.053 1.35	.497 12.62	270 1201	5.00 127.00
	<b>9559</b>	9	E2	500 1000	152.4 304.8	108.0 215.0	49.0 97.6	.053 1.35	.579 14.71	395 1757	5.80 147.32
	<b>9563</b>	11	E2	500 1000	152.4 304.8	133.0 270.0	60.4 122.5	.063 1.60	.665 16.89	478 2126	6.75 171.45
	<b>9565</b>	15	E2	500 1000	152.4 304.8	169.0 342.0	76.8 155.5	.063 1.60	.739 18.77	640 2847	7.50 190.50



**Individually Shielded (100% Coverage) • PVC Insulation • Chrome PVC Jacket**

NEC: PLTC, ITC, CMG CEC: CMG FT4 IEEE 1202/383 ICEA T-29-520	<b>9368</b>	2	E2	500 1000	152.4 304.8	37.5 73.0	17.0 33.2	.042 1.07	.378 9.60	125 556	3.75 95.25
	<b>9369</b>	3	E2	500 1000	152.4 304.8	55.0 109.0	25.0 49.5	.053 1.35	.423 10.74	220 979	4.25 107.95
	<b>3029A</b>	4	E1	Bulk †	Bulk	—	—	.053 1.35	.461 11.71	296 1317	4.50 114.30
	<b>9388</b>	4	E2	500 1000	152.4 304.8	71.5 135.0	32.5 61.4	.053 1.35	.461 11.71	296 1317	4.60 116.84
	<b>9389</b>	6	E2	500 1000	152.4 304.8	97.0 190.0	44.1 86.4	.053 1.35	.538 13.67	440 1957	5.25 133.35
	<b>9390</b>	9	E2	500 1000	152.4 304.8	137.5 270.0	63.0 123.6	.064 1.63	.652 16.56	666 2963	6.50 165.10
	<b>9391</b>	11	E2	500 1000	152.4 304.8	158.5 321.0	72.0 145.9	.064 1.63	.729 18.52	815 3626	7.25 184.15
	<b>9392</b>	15	E2	500 1000	152.4 304.8	209.0 428.0	95.0 194.5	.064 1.63	.808 20.52	1100 4893	8.00 203.20



E1, E2 = Refer to Technical Information section for color code.  
Alternate color coding available upon request.

Multiple pair or triad cables have each pair/triad numbered for ease of identification.

†Bulk = Check length available for specific construction.

**Conductor, Insulation and Jacket Options\*\***

To Specify:			Bare	Tinned	Insulation/Jacket
<b>1234</b>	<b>A</b>	<b>E</b>	<b>A</b>	<b>B</b>	PVC/PVC
Start with Part No.	Add or replace letter code for desired conductor, insulation & jacket	Add for Exposed Run rating if desired			
			<b>C</b>	<b>D</b>	XLPE/PVC
			<b>K</b>	<b>L</b>	TPE/TPE
			<b>Q</b>	<b>R</b>	XLPE/CPE
			<b>S</b>	<b>T</b>	XLPE/Haloarrest®

\*\*For 1000 and 3000 Series cables only.



# UL Instrumentation Cable

## 300V Power-Limited Tray Cables


### Industrial Grade Sunlight- and Oil-Resistant Jackets

Description	Part No.	No. of Pairs	Color Code	Standard Lengths		Standard Unit Weight		Jacket Thickness		Nominal OD		Maximum Pull Tension		Minimum Bend Radius	
				Ft.	m	Lbs.	kg	Inch	mm	Inch	mm	Lbs.	N	Inch	mm

**18 AWG Pairs** Stranded (7x26) Bare Copper Conductors • Twisted Pairs

**Overall Beldfoil® Shield (100% Coverage) • PVC Insulation • Black PVC Jacket** (See chart below for other options)


NEC: PLTC, ITC, CMG  
CEC: CMG FT4  
IEEE 1202/383  
ICEA T-29-520



<b>1032A</b>	1	E1	1000 10000 †	304.8 3048.0	38.0 380.0	17.2 172.5	.037	.94	.233	5.92	67	298	2.50	63.50
<b>3025A</b>	2	E1	10000 †	3048.0	760.0	344.7	.042	1.07	.375	9.53	121	538	3.50	88.90
<b>1529A</b>	3	E1	7500 †	2286.0	735.0	333.4	.053	1.35	.415	10.54	165	734	4.25	107.95
<b>1466A</b>	4	E1	7500 †	2286.0	892.5	404.8	.053	1.35	.452	11.48	211	939	4.50	114.30
<b>1467A</b>	8	E1	7500 †	2286.0	1477.5	670.8	.053	1.35	.523	13.28	390	1735	5.50	139.70
<b>1468A</b>	12	E1	5000 †	1524.0	1375.0	624.3	.064	1.63	.673	17.09	560	2491	6.75	171.45
<b>3034A</b>	16	E1	Bulk ††	Bulk	—	—	.066	1.68	.713	18.11	640	2847	7.25	184.15
<b>1471A</b>	24	E1	2500 †	762.0	1292.5	586.3	.074	1.88	.932	23.67	1105	4916	9.25	234.95
<b>1472A</b>	36	E1	1250 †	381.0	910.0	413.1	.074	1.88	1.062	26.97	1644	7313	10.50	266.70
<b>3041A</b>	50	E1	Bulk ††	Bulk	—	—	.074	1.88	1.240	31.50	2240	10049	12.75	323.85

**Individually Shielded + Overall Beldfoil (100% Coverage) • PVC Insulation • Black PVC Jacket** (Other options below)

NEC: PLTC, ITC, CMG  
CEC: CMG FT4  
IEEE 1202/383  
ICEA T-29-520



<b>1474A</b>	2	E1	7500 †	2286.0	720.0	326.9	.053	1.35	.408	10.16	149	663	4.00	101.60
<b>1475A</b>	4	E1	7500 †	2286.0	1065.0	483.1	.053	1.35	.468	11.89	267	1188	4.75	120.65
<b>1476A</b>	8	E1	5000 †	1524.0	1185.0	538.0	.053	1.35	.594	15.10	501	2229	6.00	152.40
<b>1477A</b>	12	E1	5000 †	1524.0	1740.0	789.3	.064	1.63	.737	18.72	779	3465	7.25	184.15
<b>3035A</b>	16	E1	Bulk ††	Bulk	—	—	.064	1.63	.836	21.20	725	3225	8.50	215.90
<b>1480A</b>	24	E1	2500 † 5000 †	762.0 1524.0	1712.5 3390.0	777.5 1539.1	.074	1.88	1.019	25.88	1443	6419	10.25	260.35
<b>1481A</b>	36	E1	Bulk ††	Bulk	—	—	.074	1.88	1.163	29.54	2148	9556	11.75	298.45
<b>3042A</b>	50	E1	Bulk ††	Bulk	—	—	.084	2.13	1.389	35.28	2935	13057	14.00	355.60

E1 = Refer to Technical Information section for color code.  
Alternate color coding available upon request.

Multiple pair or triad cables have each pair/triad numbered for ease of identification.

†Final put-up length may vary ±10% from length shown.

††Bulk = Check length available for specific construction.

**Conductor, Insulation and Jacket Options\*\***

To Specify:		
<b>1234</b>	<b>A</b>	<b>E</b>
Start with Part No.	Add or replace letter code for desired conductor, insulation & jacket	Add for Exposed Run rating if desired

Bare	Tinned	Insulation/Jacket
<b>A</b>	<b>B</b>	PVC/PVC
<b>C</b>	<b>D</b>	XLPE/PVC
<b>K</b>	<b>L</b>	TPE/TPE
<b>Q</b>	<b>R</b>	XLPE/CPE
<b>S</b>	<b>T</b>	XLPE/Haloarrest®

\*\*For 1000 and 3000 Series cables only.



For more information, contact Belden Technical Support: 1-800-BELDEN-1 • www.belden.com

# UL Instrumentation Cable

## 300V Power-Limited Tray Cables

### Industrial Grade Sunlight- and Oil-Resistant Jackets

Description	Part No.	No. of Triads	Color Code	Standard Lengths		Standard Unit Weight		Jacket Thickness		Nominal OD		Maximum Pull Tension		Minimum Bend Radius	
				Ft.	m	Lbs.	kg	Inch	mm	Inch	mm	Lbs.	N	Inch	mm

**18 AWG Triads Stranded (19x30) Tinned Copper Conductors • Twisted Triads**

**Unshielded • PVC Insulation • Chrome PVC Jacket**

NEC: PLTC, ITC, CMG CEC: CMG FT4 IEEE 1202/383 ICEA T-29-520	<b>9493</b>	1	E1	U-500 U-1000	U-152.4 U-304.8	20.0 38.0	9.1 17.2	.037	.94	.242	6.15	62	276	2.25	57.15
---	-------------	---	----	-----------------	--------------------	--------------	-------------	------	-----	------	------	----	-----	------	-------



Rip Cord

**Overall Beldfoil® Shield (100% Coverage) • PVC Insulation • Chrome PVC Jacket**

NEC: PLTC, ITC, CMG CEC: CMG FT4 IEEE 1202/383 ICEA T-29-520	<b>9365</b>	1	E1	U-500 U-1000	U-152.4 U-304.8	22.0 43.0	10.0 19.5	.037	.94	.245	6.22	74	329	2.50	63.50
---	-------------	---	----	-----------------	--------------------	--------------	--------------	------	-----	------	------	----	-----	------	-------




Rip Cord  
Drain Wire

**18 AWG Triads Stranded (7x26) Bare Copper Conductors • Twisted Triads**

**Overall Beldfoil Shield (100% Coverage) • PVC Insulation • Black PVC Jacket (See chart below for other options)**


NEC: PLTC, ITC, CMG CEC: CMG FT4 IEEE 1202/383 ICEA T-29-520	<b>1036A</b>	1	E1	1000 10000 †	304.8 3048.0	43.0 430.0	19.5 195.1	.037	.94	.236	5.99	90	400	2.40	60.96
	<b>3027A</b>	2	E1	Bulk ††	Bulk	—	—	.055	1.40	.420	10.67	165	734	4.25	107.95
	<b>3030A</b>	4	E1	Bulk ††	Bulk	—	—	.055	1.40	.521	13.20	240	1068	4.50	114.30
	<b>3032A</b>	8	E1	Bulk ††	Bulk	—	—	.064	1.63	.580	14.70	501	2229	5.75	146.05
	<b>3036A</b>	16	E1	Bulk ††	Bulk	—	—	.077	1.96	.900	22.86	1050	4671	9.00	228.60
	<b>3038A</b>	24	E1	Bulk ††	Bulk	—	—	.077	1.96	1.020	25.91	1450	6450	10.25	260.35



Rip Cord  
Drain Wire  
Communication Wire

**Individually Shielded + Overall Beldfoil (100% Coverage) • PVC Insulation • Black PVC Jacket (Other options below)**

NEC: PLTC, ITC, CMG CEC: CMG FT4 IEEE 1202/383 ICEA T-29-520	<b>3028A</b>	2	E1	Bulk ††	Bulk	—	—	.055	1.40	.450	11.43	175	779	4.50	114.30
	<b>3031A</b>	4	E1	Bulk ††	Bulk	—	—	.053	1.35	.533	13.50	255	1134	5.25	133.35
	<b>3033A</b>	8	E1	Bulk ††	Bulk	—	—	.064	1.63	.654	16.50	560	2491	6.50	165.10
	<b>3068A</b>	12	E1	Bulk ††	Bulk	—	—	.063	1.60	.840	21.30	800	3559	8.50	215.90
	<b>3037A</b>	16	E1	Bulk ††	Bulk	—	—	.074	1.88	.974	24.70	1320	5872	10.50	266.70
	<b>3039A</b>	24	E1	Bulk ††	Bulk	—	—	.074	1.88	1.200	30.50	1620	7207	11.25	285.75



Rip Cord  
Drain Wires  
Communication Wire

E1 = Refer to Technical Information section for color code.  
Alternate color coding available upon request.

Multiple pair or triad cables have each pair/triad numbered for ease of identification.

†Final put-up length may vary ±10% from length shown.

††Bulk = Check length available for specific construction.

**Conductor, Insulation and Jacket Options\*\***

To Specify:	Bare	Tinned	Insulation/Jacket
<b>1234</b>	<b>A</b>	<b>B</b>	PVC/PVC
Start with Part No.	Add or replace letter code for desired conductor, insulation & jacket	Add for Exposed Run rating if desired	
	<b>C</b>	<b>D</b>	XLPE/PVC
	<b>K</b>	<b>L</b>	TPE/TPE
	<b>Q</b>	<b>R</b>	XLPE/CPE
	<b>S</b>	<b>T</b>	XLPE/Haloarrest®

\*\*For 1000 and 3000 Series cables only.



# UL Instrumentation Cable

## 300V Power-Limited Tray Cables


### Industrial Grade Sunlight- and Oil-Resistant Jackets

Description	Part No.	No. of Pairs	Color Code	Standard Lengths		Standard Unit Weight		Jacket Thickness		Nominal OD		Maximum Pull Tension		Minimum Bend Radius	
				Ft.	m	Lbs.	kg	Inch	mm	Inch	mm	Lbs.	N	Inch	mm

**16 AWG Pairs** Stranded (19x29) Tinned Copper Conductors • Twisted Pairs


**Unshielded • PVC Insulation • Chrome PVC Jacket**

NEC: PLTC, ITC, CMG CEC: CMG FT4 IEEE 1202/383 ICEA T-29-520	<b>9410</b>	1	E2	U-500 U-1000	U-152.4 U-304.8	18.5 36.0	8.4 16.3	.037	.94	.254	6.45	78	347	2.50	63.50
---	-------------	---	----	-----------------	--------------------	--------------	-------------	------	-----	------	------	----	-----	------	-------



**Overall Beldfoil® Shield (100% Coverage) • PVC Insulation • Chrome PVC Jacket**


NEC: PLTC, ITC, CMG CEC: CMG FT4 IEEE 1202/383 ICEA T-29-520	<b>9316</b>	1	E2	U-500 U-1000	U-152.4 U-304.8	21.5 41.0	9.8 18.6	.037	.94	.256	6.50	90	400	2.50	63.50
---	-------------	---	----	-----------------	--------------------	--------------	-------------	------	-----	------	------	----	-----	------	-------



**16 AWG Pairs** Stranded (7x24) Bare Copper Conductors • Twisted Pairs


**Unshielded • PVC Insulation • Black PVC Jacket** (See chart below for other insulation and jacket options)

NEC: PLTC, ITC, CMG CEC: CMG FT4 IEEE 1202/383 ICEA T-29-520	<b>1035A</b>	1	E1	1000 10000 †	304.8 3048.0	40.0 400.0	18.1 181.4	.037	.94	.254	6.45	71	318	2.50	63.50
---	--------------	---	----	-----------------	-----------------	---------------	---------------	------	-----	------	------	----	-----	------	-------



**Overall Beldfoil Shield (100% Coverage) • PVC Insulation • Black PVC Jacket** (See chart below for other options)

NEC: PLTC, ITC, CMG CEC: CMG FT4 IEEE 1202/383 ICEA T-29-520	<b>1030A</b>	1	E1	1000 10000 †	304.8 3048.0	46.0 480.0	20.9 217.7	.037	.94	.257	6.53	94	418	2.50	63.50
	<b>3043A</b>	2	E1	Bulk ††	Bulk	—	—	.053	1.35	.437	11.10	83	369	4.50	114.30
	<b>1528A</b>	3	E1	7500 †	2286.0	967.5	438.9	.053	1.35	.457	11.61	250	1112	4.75	120.65
	<b>1484A</b>	4	E1	7500 †	2286.0	1200.0	544.8	.053	1.35	.495	12.57	330	1468	5.00	127.00
	<b>1485A</b>	8	E1	7500 †	2286.0	2010.0	911.7	.053	1.35	.597	15.16	616	2740	6.00	152.40
	<b>1486A</b>	12	E1	5000 †	1524.0	1965.0	892.1	.064	1.63	.741	18.80	892	3968	7.50	190.50
	<b>3050A</b>	16	E1	Bulk ††	Bulk	—	—	.064	1.63	.831	21.10	661	2940	8.50	215.90
	<b>1489A</b>	24	E1	1250 †	381.0	923.8	419.4	.074	1.88	1.032	26.20	1749	7780	10.50	266.70
	<b>1490A</b>	36	E1	1250 †	381.0	1313.8	596.4	.074	1.88	1.178	29.80	2606	11592	11.75	298.45
	<b>3056A</b>	50	E1	Bulk ††	Bulk	—	—	.088	2.24	1.550	39.37	3615	16082	15.50	393.70



**Individually Shielded + Overall Beldfoil Shield (100% Coverage) • PVC Insulation • Black PVC Jacket** (Options below)

NEC: PLTC, ITC, CMG CEC: CMG FT4 IEEE 1202/383 ICEA T-29-520	<b>1492A</b>	2	E1	7500 †	2286.0	885.0	401.8	.053	1.35	.450	11.43	232	1032	4.50	114.30
	<b>1493A</b>	4	E1	7500 †	2286.0	1387.5	629.4	.055	1.40	.512	13.11	420	1868	5.00	127.00
	<b>1494A</b>	8	E1	5000 †	1524.0	1640.0	743.9	.066	1.68	.687	17.50	795	3537	7.00	177.80
	<b>1495A</b>	12	E1	2500 †	762.0	1202.5	545.5	.066	1.68	.822	20.73	1170	5205	8.25	209.55
	<b>3051A</b>	16	E1	Bulk ††	Bulk	—	—	.074	1.88	.936	23.77	661	2940	10.00	254.00
	<b>1498A</b>	24	E1	5000 †	1524.0	4340.0	1968.6	.074	1.88	1.149	29.18	2296	10214	11.50	292.10
	<b>1499A</b>	36	E1	Bulk ††	Bulk	—	—	.084	2.13	1.334	33.88	3167	14088	13.50	342.90
	<b>3057A</b>	50	E1	Bulk ††	Bulk	—	—	.088	2.24	1.600	40.64	2066	9190	16.00	406.40

E1, E2 = Refer to Technical Information section for color code.  
Alternate color coding available upon request.

Multiple pair or triad cables have each pair/triad numbered for ease of identification.

†Final put-up length may vary ±10% from length shown.

††Bulk = Check length available for specific construction.

**Conductor, Insulation and Jacket Options\*\***

To Specify:		
<b>1234</b>	<b>A</b>	<b>E</b>
Start with Part No.	Add or replace letter code for desired conductor, insulation & jacket	Add for Exposed Run rating if desired

Bare	Tinned	Insulation/Jacket
<b>A</b>	<b>B</b>	PVC/PVC
<b>C</b>	<b>D</b>	XLPE/PVC
<b>K</b>	<b>L</b>	TPE/TPE
<b>Q</b>	<b>R</b>	XLPE/CPE
<b>S</b>	<b>T</b>	XLPE/Haloarrest®

\*\*For 1000 and 3000 Series cables only.



For more information, contact Belden Technical Support: 1-800-BELDEN-1 • www.belden.com



# UL Instrumentation Cable

## 300V Power-Limited Tray Cables


### Industrial Grade Sunlight- and Oil-Resistant Jackets

Description	Part No.	No. of Triads	Color Code	Standard Lengths		Standard Unit Weight		Jacket Thickness		Nominal OD		Maximum Pull Tension		Minimum Bend Radius	
				Ft.	m	Lbs.	kg	Inch	mm	Inch	mm	Lbs.	N	Inch	mm

**16 AWG Triads Stranded (19x29) Tinned Copper Conductors • Twisted Triads**


**Unshielded • PVC Insulation • Chrome PVC Jacket**

NEC: PLTC, ITC, CMG CEC: CMG FT4 IEEE 1202/383 ICEA T-29-520	<b>9494</b>	1	E1	U-500 U-1000	U-152.4 U-304.8	24.5 48.0	11.1 21.8	.037	.94	.268	6.81	91	405	2.75	69.85
---	-------------	---	----	-----------------	--------------------	--------------	--------------	------	-----	------	------	----	-----	------	-------



**Overall Beldfoil® Shield (100% Coverage) • PVC Insulation • Chrome PVC Jacket**


NEC: PLTC, ITC, CMG CEC: CMG FT4 IEEE 1202/383 ICEA T-29-520	<b>9366</b>	1	E1	U-500 U-1000	U-152.4 U-304.8	27.5 54.0	12.5 24.5	.037	.94	.270	6.86	116	516	2.75	69.85
---	-------------	---	----	-----------------	--------------------	--------------	--------------	------	-----	------	------	-----	-----	------	-------



**16 AWG Triads Stranded (7x24) Bare Copper Conductors • Twisted Triads**


**Unshielded • PVC Insulation • Black PVC Jacket (See chart below for other options)**

NEC: PLTC, ITC, CMG CEC: CMG FT4 IEEE 1202/383 ICEA T-29-520	<b>1034A</b>	1	E1	1000 4000 †	304.8 1219.2	51.0 208.0	23.2 94.4	.037	.94	.268	6.81	107	476	2.75	69.85
---	--------------	---	----	----------------	-----------------	---------------	--------------	------	-----	------	------	-----	-----	------	-------



**Overall Beldfoil Shield (100% Coverage) • PVC Insulation • Black PVC Jacket (See chart below for other options)**

NEC: PLTC, ITC, CMG CEC: CMG FT4 IEEE 1202/383 ICEA T-29-520	<b>1031A</b>	1	E1	1000 10000 †	304.8 3048.0	58.0 610.0	26.4 276.7	.037	.94	.271	6.88	130	578	2.75	69.85
	<b>3044A</b>	2	E1	Bulk ††	Bulk	—	—	.053	1.35	.483	12.27	259	1152	4.75	120.65
	<b>3046A</b>	4	E1	Bulk ††	Bulk	—	—	.053	1.35	.570	14.40	473	2104	5.75	146.05
	<b>3048A</b>	8	E1	Bulk ††	Bulk	—	—	.063	1.60	.760	19.30	902	4013	7.50	190.50
	<b>3052A</b>	16	E1	Bulk ††	Bulk	—	—	.074	1.88	1.032	26.21	1758	7821	11.25	285.75
	<b>3054A</b>	24	E1	Bulk ††	Bulk	—	—	.074	1.88	1.180	29.90	2615	11633	11.75	298.45

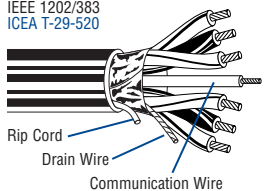

**Individually Shielded + Overall Beldfoil Shield (100% Coverage) • PVC Insulation • Black PVC Jacket (Options below)**

NEC: PLTC, ITC, CMG CEC: CMG FT4 IEEE 1202/383 ICEA T-29-520	<b>3045A</b>	2	E1	Bulk ††	Bulk	—	—	.053	1.35	.506	12.80	304	1352	5.00	127.00
	<b>3047A</b>	4	E1	Bulk ††	Bulk	—	—	.053	1.35	.569	14.45	563	2505	6.00	152.40
	<b>3049A</b>	8	E1	Bulk ††	Bulk	—	—	.064	1.63	.764	19.41	1081	4809	8.00	203.20
	<b>3069A</b>	12	E1	Bulk ††	Bulk	—	—	.074	1.88	.998	25.35	1500	6673	10.00	254.00
	<b>3053A</b>	16	E1	Bulk ††	Bulk	—	—	.074	1.88	1.150	29.20	2117	9418	11.50	292.10
	<b>3055A</b>	24	E1	Bulk ††	Bulk	—	—	.084	2.13	1.320	33.53	3153	14026	13.25	336.55



E1 = Refer to Technical Information section for color code.  
Alternate color coding available upon request.

Multiple pair or triad cables have each pair/triad numbered for ease of identification.

†Final put-up length may vary ±10% from length shown.

††Bulk = Check length available for specific construction.

**Conductor, Insulation and Jacket Options\*\***

To Specify:	Bare	Tinned	Insulation/Jacket
<b>1234</b>	<b>A</b>	<b>B</b>	PVC/PVC
<b>5</b>	<b>C</b>	<b>D</b>	XLPE/PVC
<b>6</b>	<b>K</b>	<b>L</b>	TPE/TPE
<b>7</b>	<b>Q</b>	<b>R</b>	XLPE/CPE
<b>8</b>	<b>S</b>	<b>T</b>	XLPE/Haloarrest®

\*\*For 1000 and 3000 Series cables only.



# UL Instrumentation Cable

## 300V Power-Limited Tray Cables


### Industrial Grade Sunlight- and Oil-Resistant Jackets

Description	Part No.	No. of Pairs/Triads	Color Code	Standard Lengths		Standard Unit Weight		Jacket Thickness		Nominal OD		Maximum Pull Tension		Minimum Bend Radius	
				Ft.	m	Lbs.	kg	Inch	mm	Inch	mm	Lbs.	N	Inch	mm

**14 AWG Pairs** Stranded (42x30) Tinned Copper Conductors • Twisted Pairs


**Unshielded • PVC Insulation • Chrome PVC Jacket**

NEC: PLTC, ITC, CL3R CEC: FT4 IEEE 1202/383 ICEA T-29-520	<b>9411</b>	1	E2	U-500 1000	U-152.4 304.8	28.0 60.0	12.7 27.3	.042	1.07	.322	8.18	124	552	3.25	82.55
--	-------------	---	----	---------------	------------------	--------------	--------------	------	------	------	------	-----	-----	------	-------



**Overall Beldfoil® Shield (100% Coverage) • PVC Insulation • Chrome PVC Jacket**


NEC: PLTC, ITC, CL3R CEC: FT4 IEEE 1202/383 ICEA T-29-520	<b>9314</b>	1	E2	U-500 1000	U-152.4 304.8	32.5 66.0	14.7 29.9	.042	1.07	.324	8.23	140	623	3.25	82.55
--	-------------	---	----	---------------	------------------	--------------	--------------	------	------	------	------	-----	-----	------	-------



**14 AWG Triads** Stranded (42x30) Tinned Copper Conductors • Twisted Triads


**Unshielded • PVC Insulation • Chrome PVC Jacket**

NEC: PLTC, ITC, CL3R CEC: FT4 IEEE 1202/383 ICEA T-29-520	<b>9495</b>	1	E1	500 1000	152.4 304.8	43.5 86.0	19.7 39.0	.042	1.07	.340	8.64	186	827	3.50	88.90
--	-------------	---	----	-------------	----------------	--------------	--------------	------	------	------	------	-----	-----	------	-------



**Overall Beldfoil Shield (100% Coverage) • PVC Insulation • Chrome PVC Jacket**

NEC: PLTC, ITC, CL3R CEC: FT4 IEEE 1202/383 ICEA T-29-520	<b>9367</b>	1	E1	500 1000	152.4 304.8	43.5 88.0	19.7 40.0	.042	1.07	.343	8.71	188	836	3.50	88.90
--	-------------	---	----	-------------	----------------	--------------	--------------	------	------	------	------	-----	-----	------	-------



E1, E2 = Refer to Technical Information section for color code.  
Alternate color coding available upon request.

# UL Instrumentation Cable

300V Power-Limited Tray Cables


Industrial Grade Sunlight- and Oil-Resistant Jackets

Description	Part No.	No. of Pairs/Triads	Color Code	Standard Lengths		Standard Unit Weight		Jacket Thickness		Nominal OD		Maximum Pull Tension		Minimum Bend Radius	
				Ft.	m	Lbs.	kg	Inch	mm	Inch	mm	Lbs.	N	Inch	mm

**12 AWG Pairs** Stranded (65x30) Tinned Copper Conductors • Twisted Pairs


**Unshielded • PVC Insulation • Chrome PVC Jacket**

NEC: ITC, CL3R CEC: FT4 IEEE 1202/383 ICEA T-29-520	<b>9412</b>	1	E2	500	152.4	41.5	18.8	.042	1.07	.370	9.40	197	876	4.25	107.95
				1000	304.8	83.0	37.7								



**Overall Beldfoil® Shield (100% Coverage) • PVC Insulation • Chrome PVC Jacket**


NEC: PLTC, ITC, CL3R CEC: FT4 IEEE 1202/383 ICEA T-29-520	<b>9312</b>	1	E2	500	152.4	49.0	22.3	.042	1.07	.373	9.47	225	1001	4.25	107.95
				1000	304.8	96.0	43.6								



**12 AWG Triads** Stranded (7x20) Bare Copper Conductors • Twisted Triads

**Overall Beldfoil® Shield (100% Coverage) • PVC Insulation • Black PVC Jacket** (See chart below for other options)

NEC: PLTC, ITC, CL3R CEC: FT4 IEEE 1202/383 ICEA T-29-520	<b>3102A</b>	1	E1	Bulk †	Bulk	—	—	.053	1.35	.432	11.00	315	1401	3.50	88.90
--	--------------	---	----	--------	------	---	---	------	------	------	-------	-----	------	------	-------



E1, E2 = Refer to Technical Information section for color code.  
Alternate color coding available upon request.

†Bulk = Check length available for specific construction.

**Conductor, Insulation and Jacket Options\*\***

To Specify:			Bare	Tinned	Insulation/Jacket
<b>1234</b>	<b>A</b>	<b>E</b>	<b>A</b>	<b>B</b>	PVC/PVC
<b>C</b>	<b>D</b>		<b>C</b>	<b>D</b>	XLPE/PVC
<b>K</b>	<b>L</b>		<b>K</b>	<b>L</b>	TPE/TPE
<b>Q</b>	<b>R</b>		<b>Q</b>	<b>R</b>	XLPE/CPE
<b>S</b>	<b>T</b>		<b>S</b>	<b>T</b>	XLPE/Haloarrest®

\*\*For 1000 and 3000 Series cables only.



For more information, contact Belden Technical Support: 1-800-BELDEN-1 • www.belden.com

# UL Instrumentation Cable

## Thermocouple Extension Cables and Thermocouple Wire — Overview

### Construction Thermocouple Extension Cable

Conductor material determined by the thermocouple extension wire type. FEP or PVC insulated with FEP or PVC jacket. Nylon rip cord included in all PVC-jacketed thermocouple extension cables. Communication wire included on all multi-pair, PVC constructions — 22 AWG (7x30) bare copper orange PVC insulation.

NOTE: The temperature ranges in Table A are applicable only to the thermocouple conductors and not to the cable. The cable must never be exposed to temperatures higher than the maximum temperature ratings shown in Table B.

**Table B: Other Insulation/Jacket Options**

UL Listed for PLTC	
Insulation/Jacket	Max. Temp Rating
XLPE/PVC	90°C
XLPE/CPE	90°C
PVC/PVC	105°C
PVC/CPE	105°C
PE/PVC	75°C
FPE/PVC	75°C
TPE/TPE	105°C
XLPE/Haloarrest®	90°C
FEP/FEP	200°C

### Application

#### Unshielded

Parallel non-shielded extension wire may be utilized in low noise environments when recommended by the instrument manufacturer.

#### Overall Shield

Recommended, except in areas where high voltage and current sources create excessive noise interference. The Beldfoil® shield with drain wire provides 100% coverage for maximum shield effectiveness.

#### Individually Shielded

Individually shielded pairs are recommended for use in applications where optimum noise rejection is required.

### PVC Insulated, PVC Jacketed Cable Specifications

- UL Subject 13
- UL 1685 (UL 1581) Vertical Tray Flame Test comparable to IEEE 383-1974 (70,000 BTU) Flame Test
- ANSI/MC 96.1-1982
- NEC CMG
- NEC Type PLTC Listed, which is approved for cable tray use in Class 1, Division 2, hazardous areas and non-hazardous areas, cable trays, raceways, conduit and supported by messenger wires.

- NEC Type ITC Listed, which is approved for cable tray use, raceways hazardous locations according to Articles 501, 502, 503 and 504; or as aerial on a cable messenger, and under raised floors in control rooms and rack rooms where arranged to prevent damage to the cable. Usages are allowed based on qualified persons servicing all installations.
- PVC/PVC constructions are CMG, FT4, IEEE 1202 and IEEE 383-2003 rated, and meet ICEA T-29-520 Flame Test.
- UL 1277 TC versions approved for use in Class 1 trays available as special.

### Shielded Twisted Pair (FEP insulated, FEP jacketed cable specifications)

- UL Subject 13
- NFPA 262 (UL 910 Steiner Tunnel Flame Test) comparable to FT6 Flame Test
- ANSI/MC 96.1-1982
- NEC Type CL3P/PLTC Listed, which is approved for use in ducts, plenums and other space used for environmental air.
- UL 1277 TC versions approved for use in Class 1 trays available as special.

### Thermocouple Wire

Conductor material determined by the thermocouple type. FEP insulated and jacketed flat constructions.

FEP thermocouple wire is impervious to chemical attack and is flame retardant.

**Table A: Thermocouple Identification and Limits of Error — Reference Junction 0°C\***

ANSI Symbol	Temperature Range (°C) (conductor only)	Limits of Error Standard (°C)	Jacket Color	Insulation Color Code		Conductor Identification	
				Positive (+)	Negative (-)	Positive (+)	Negative (-)
E	0 to 340 340 to 540	±1.7°C ±.50%	Brown	Purple	Red	Chromel® Non-magnetic	Constantan Silver Color
J	0 to 293 293 to 480	±2.2°C ±.75%	Brown	White	Red	Iron Magnetic	Constantan Non-magnetic
K	0 to 293 293 to 980	±2.2°C ±.75%	Brown	Yellow	Red	Chromel Non-magnetic	Alumel® Magnetic
T	0 to 133 133 to 260	±1.0°C ±.75%	Brown	Blue	Red	Copper Copper Color	Constantan Non-magnetic
EX	0 to 200	±1.7°C	Purple	Purple	Red	Chromel	Constantan
JX	0 to 200	±2.2°C	Black	White	Red	Iron	Constantan
KX	0 to 200	±2.2°C	Yellow	Yellow	Red	Chromel	Alumel
TX	0 to 100	±1.0°C	Blue	Blue	Red	Copper	Constantan

Limits of error per ANSI MC96.1-1982. Limits shown do not include system or installation error. Percentages refer to the temperature being measured.

\*The Temperature Range and Limits of Error are for standard grade thermocouples, Reference ANSI MC96.1-1982 for special grade thermocouples. The Temperature Ranges for type E, J, K and T thermocouple wires listed above pertain to 20 AWG wire.

Additional constructions available upon request.

Standard lengths may be subject to tolerance. Custom lengths may be available upon request. Contact the Belden Electronics Division Customer Service Department for additional information. 1-800-BELDEN-1



# UL Instrumentation Cable

## Thermocouple Extension Cables


### Industrial Grade Sunlight- and Oil-Resistant Jackets

Description	Part No.	ANSI Type	No. of Pairs	Color Code	Jacket Color	Standard Lengths		Standard Unit Weight		Insulation Thickness		Nominal OD	
						Ft.	m	Lbs.	kg	Inch	mm	Inch	mm

**20 AWG Pairs** Solid Conductors • (See chart on page 18.53 for conductor specifications by ANSI Type)


**Overall Beldfoil® Shield (100% Coverage) • PVC Insulation • PVC Jacket**

300V 105°C NEC: PLTC, ITC, CMG CEC: CMG FT4 ICEA T-29-520 IEEE 1202/383	<b>3111A</b>	JX	1	White, Red	Black	5000 †	1524.0	115.0	52.2	.016	.41	.206	5.23
	<b>3112A</b>	KX	1	Yellow, Red	Yellow	5000 †	1524.0	120.0	54.5	.016	.41	.206	5.23
	<b>3113A</b>	TX	1	Blue, Red	Blue	5000 †	1524.0	115.0	52.2	.016	.41	.206	5.23



**Individually Shielded + Overall Beldfoil Shield (100% Coverage) • PVC Insulation • PVC Jacket**

300V 105°C NEC: PLTC, ITC, CMG CEC: CMG FT4 ICEA T-29-520 IEEE 1202/383	<b>3115A</b>	JX	2	White, Red	Black	5000 †	1524.0	315.0	143.0	.016	.41	.332	8.43
	<b>1006A</b>	JX	4	White, Red	Black	5000 †	1524.0	480.0	217.9	.016	.41	.383	9.73
	<b>1012A</b>	KX	4	Yellow, Red	Yellow	5000 †	1524.0	530.0	240.6	.016	.41	.383	9.73
	<b>1013A</b>	KX	8	Yellow, Red	Yellow	5000 †	1524.0	825.0	374.6	.016	.41	.503	12.78
	<b>1014A</b>	KX	12	Yellow, Red	Yellow	5000 †	1524.0	1195.0	542.5	.016	.41	.603	15.32



**16 AWG Pairs** Solid Conductors • (See chart on page 18.53 for conductor specifications by ANSI Type)

**Overall Beldfoil Shield (100% Coverage) • PVC Insulation • PVC Jacket**

300V 105°C NEC: PLTC, ITC, CMG CEC: CMG FT4 ICEA T-29-520 IEEE 1202/383	<b>1101A</b>	EX	1	Purple, Red	Purple	10000 †	3048.0	450.0	204.3	.017	.43	.248	6.30
	<b>1000A</b>	JX	1	White, Red	Black	1000	304.8	42.0	19.1	.017	.43	.248	6.30
						10000 †	3048.0	420.0	190.7				
	<b>1018A</b>	KX	1	Yellow, Red	Yellow	1000	304.8	42.0	19.1	.017	.43	.248	6.30
						10000 †	3048.0	420.0	190.7				
	<b>1023A</b>	TX	1	Blue, Red	Blue	10000 †	3048.0	450.0	204.3	.017	.43	.248	6.30



Multiple pair cables have each pair numbered for ease of identification.


†Final put-up length may vary ±10% from length shown.

# UL Instrumentation Cable


High-Temperature Thermocouple Extension Cables and Thermocouple Wire  
Industrial Grade Sunlight- and Oil-Resistant Jackets


Description	Part No.	ANSI Type	No. of Pairs/Cond.	Color Code	Jacket Color	Standard Lengths		Standard Unit Weight		Insulation Thickness		Nominal OD	
						Ft.	m	Lbs.	kg	Inch	mm	Inch	mm

**High-Temp Extension Cable • 20 AWG Solid Conductors • (See chart on page 18.53 for conductor specifications by ANSI Type)**


<b>Plenum • Unshielded • FEP Insulation • FEP Jacket</b>													
300V 200°C NEC: PLTC, CL3P 	83932	KX	2/c	Yellow, Red	Yellow	500 †	152.4	6.5	3.0	.010	.25	.076	1.93
						1000 †	304.8	12.0	5.4			x	x
	83934	TX	2/c	Blue, Red	Blue	1000 †	304.8	13.0	6.0	.010	.25	.076	1.93
												x	x
												.128	3.25

**High-Temp Extension Cable • 20 AWG Stranded (7x28) Conductors • (See chart on page 18.53 for conductor specifications by ANSI Type)**


<b>Plenum • Unshielded • FEP Insulation • FEP Jacket</b>													
300V 200°C NEC: PLTC, CL3P 	83930	JX	2/c	White, Red	Black	500 †	152.4	7.5	3.4	.010	.25	.082	2.08
						1000 †	304.8	13.0	6.0			x	x
												.140	3.56

<b>Plenum • Overall Beldfoil® Shield (100% Coverage) • FEP Insulation • FEP Jacket</b>													
300V 200°C NEC: PLTC, CL3P 	83955	EX	1 pr.	Purple, Red	Purple	500 †	152.4	9.0	4.1	.010	.25	.145	3.68
						1000 †	304.8	16.0	7.3				
	83950	JX	1 pr.	White, Red	Black	500 †	152.4	9.5	4.3	.010	.25	.145	3.68
						1000 †	304.8	16.0	7.3				
	83952	KX	1 pr.	Yellow, Red	Yellow	500 †	152.4	9.5	4.3	.010	.25	.145	3.68
						1000 †	304.8	16.0	7.3				
	83954	TX	1 pr.	Blue, Red	Blue	500 †	152.4	9.0	4.1	.010	.25	.145	3.68
						1000 †	304.8	17.0	7.7				


**High-Temp Extension Cable • 16 AWG Pairs Solid Conductors • (See chart on page 18.53 for conductor specifications by ANSI Type)**

<b>Plenum • Overall Beldfoil Shield (100% Coverage) • FEP Insulation • FEP Jacket</b>													
300V 200°C NEC: PLTC, CL3P 	1114A	EX	1	Purple, Red	Purple	5000 †	1524.0	160.0	72.6	.010	.25	.172	4.37
						1115A	JX	1	White, Red	Black	5000 †	1524.0	155.0
	1116A	KX	1	Yellow, Red	Yellow	5000 †	1524.0	160.0	72.6	.010	.25	.171	4.34
	1117A	TX	1	Blue, Red	Blue	5000 †	1524.0	160.0	72.6	.010	.25	.172	4.37

**High-Temp Extension Cable • 16 AWG Pairs Stranded (7x24) Conductors • (See chart on page 18.53 for conductor specifications by ANSI Type)**

<b>Plenum • Overall Beldfoil Shield (100% Coverage) • FEP Insulation • FEP Jacket</b>													
300V 200°C NEC: PLTC, CL3P 	83951	JX	1	White, Red	Black	500 †	152.4	16.0	7.3	.010	.25	.189	4.80
						1000 †	304.8	35.0	15.9				
	83953	KX	1	Yellow, Red	Yellow	500 †	152.4	16.0	7.3	.010	.25	.187	4.75
						1000 †	304.8	32.0	14.5				

**High-Temp Thermocouple Wire • 20 AWG Solid Conductors • (See chart on page 18.53 for conductor specifications by ANSI Type)**

<b>Plenum • Unshielded • FEP Insulation • FEP Jacket</b>													
300V 200°C NEC: PLTC, CL3P 	83915	E	2/c	Purple, Red	Brown	500 †	152.4	7.0	3.2	.010	.25	.076	1.93
						1000 †	304.8	13.0	6.0			x	x
	83900	J	2/c	White, Red	Brown	100	30.5	2.1	1.0	.010	.25	.076	1.93
						500 †	152.4	7.0	3.2			x	x
						1000 †	304.8	13.0	6.0			.128	3.25
	83905	K	2/c	Yellow, Red	Brown	100	30.5	2.1	1.0	.010	.25	.076	1.93
						500 †	152.4	7.0	3.2			x	x
						1000 †	304.8	12.0	5.4			.128	3.25
	83910	T	2/c	Blue, Red	Brown	100	30.5	2.1	1.0	.010	.25	.076	1.93
						500 †	152.4	7.0	3.2			x	x
						1000 †	304.8	12.0	5.4			.128	3.25

FEP = Fluorinated Ethylene-propylene

Multiple pair cables have each pair numbered for ease of identification.

†Final put-up length may vary ±10% from length shown.



# UL Instrumentation Cable

## 600V Tray Cables – Overview

### Tray Cable Construction Options

UL Listed for MC and TC				
Insulation/Jacket	Max. Temp Rating		Flame Tests	Ratings*
	Wet	Dry		
PVC-Nylon/PVC (THHN or THWN) 14 AWG & larger	75°C	90°C	UL 1685 FT4/IEEE 1202/383 ICEA T-29-520	ICEA S-73-532 ICEA S-61-402
PVC-Nylon/PVC (TFN or TFFN) 16 & 18 AWG	N/A	90°C	UL 1685 FT4/IEEE 1202/383 ICEA T-29-520	ICEA S-73-532 ICEA S-61-402
XLPE/PVC or CPE (XHHW-2) 14 AWG & larger	90°C	90°C	UL 1685 FT4/IEEE 1202/383 VW-1 rated singles ICEA T-29-520	ICEA S-73-532 ICEA S-66-524
XLPE/PVC or CPE (RFH-2) 16 & 18 AWG	75°C	75°C	UL 1685 FT4/IEEE 1202/383 VW-1 rated singles ICEA T-29-520	ICEA S-73-532 ICEA S-66-524 ICEA S-82-552
FRPO/PVC 18 AWG & larger	—	75°C	UL 1685	
TPE/TPE	75°C	90°C	UL 1685	
FRPO/PVC	75°C	90°C	UL 1685	
XLPE/Haloarrest® (XHHW-2) 14 AWG & larger	90°C	90°C	UL 1685 ICEA T-29-520 FT4/IEEE 1202/383	TC-LS
XLPE/Haloarrest (RFH-2) 16 & 18 AWG	75°C	75°C	UL 1685 ICEA T-29-520 FT4/IEEE 1202/383	TC-LS
FEP/PVC	90°C	90°C	UL 1685	

CPE = Chlorinated Polyethylene • FEP = Fluorinated Ethylene-propylene • FRPO = Flame-retardant Polyolefin • PVC = Polyvinyl Chloride • TPE = Thermoplastic Elastomer • XLPE = Cross-linked Polyethylene

\*Applicable to TC-rated cables only.

### Construction

Soft annealed bare or tinned copper conductors. PVC insulated with a nylon overcoat, 90°C PVC Jacket, TFN, TFFN or THHN style singles. Nylon rip cord included in all PVC-Nylon/PVC instrumentation cables.

### Application

These cables are suitable for installation in wet or dry locations. Cable jackets are resistant to sunlight, moisture and vapor penetration. The cables can be used in raceways, and (supported by messenger wire), outdoor applications and direct burial applications.

### Unshielded

Twisted non-shielded instrument pairs provide a minimal OD allowing greater tray and conduit fill. Non-shielded instrument pairs may be utilized when recommended by the instrument manufacturer and used in a metallic conduit.

### Overall Shield

Recommended for use in instrumentation applications where signals are transmitted in excess of 100 millivolts except in areas where high voltage and current sources creates excessive noise interference.

The Beldfoil® shield with drain wire provides 100% coverage for maximum shield effectiveness. Copper tape shield available upon request.

### Individually Shielded and Overall Shielded

Individually shielded pairs or triads with an overall shield are recommended for use in instrumentation applications where optimum noise rejection is required. Individual pair/triad shields are fully isolated from each other and contain a separate drain wire for grounding, to provide maximum protection from crosstalk and common mode interference. Cables with an overall shield provide additional electrostatic noise protection.

### Conductor, Insulation and Jacket Options\*

To Specify:	Bare	Tinned	Insulation/Jacket
<b>A</b>	<b>B</b>		PVC-Nylon/PVC
<b>C</b>	<b>D</b>		XLPE/PVC
<b>E</b>	<b>F</b>		FRPO/PVC
<b>G</b>	<b>H</b>		XLPE/TPE
<b>K</b>	<b>L</b>		TPE/TPE
<b>M</b>	<b>N</b>		PVC-Nylon/Oil Res II
<b>Q</b>	<b>R</b>		XLPE/CPE
<b>S</b>	<b>T</b>		XLPE/Haloarrest

\*For 1000 and 3000 Series cables only.

**To Specify:**

**1234 A**

Start with Part No. 1234  
Add or replace letter code A

### Specifications

- UL Subject 1277 TC
- UL 1685 (UL 1581) Vertical Tray Flame Test comparable to IEEE 383-1974 (70,000 BTU/hr.) Flame Test
- NEC Type TC Listed, which is approved for cable tray use in Class 1, Division 2 areas, per NEC Articles 340, 318 and 501 and for Class 1 circuits as permitted in Article 725
- PVC-nylon/PVC constructions are NEC Type NPLF Listed, which is approved for use in Non Power-Limited Fire Protective Signaling circuits, per NEC Article 760
- PVC-Nylon/PVC, XLPE/PVC and XLPE/CPE constructed cables meet IEEE 1202/IEEE 383-2003/FT4 (70,000 BTU) Flame Test
- XLPE/Haloarrest cables are UL 1277 TC-LS rated

### TC-ER Rated Cables

As an option, Belden offers all PVC-nylon/PVC, XLPE/PVC and XLPE/CPE jacketed tray cables with a TC-ER (Exposed Run) rating, formerly referred to as Open Wiring.

Per NEC Article 336, a TC-ER rated cable may be installed in an industrial establishment between a cable tray and the utilization equipment or device. A TC-ER rated cable must meet the crush and impact requirements of UL Type MC cable. By eliminating the need for metal conduit and/or armor, using a TC-ER rated cable results in savings in both installation and maintenance.

### MC Cable Ratings Optional

Customize any 600V TC instrumentation cable, with armor and a full-sized ground. See chart below to specify.

**To Specify MC Rated Cable**

<b>1</b>	<b>2</b>	<b>3456</b>	<b>A</b>
Overall Jacket Type	Armor Type	Core 4-digit Part No. 600V TC Instrumentation	Conductor, Insulation, Inner Jacket Type

### Overall Jacket

Code	Material
1	PVC
3	CPE
4	TPE
5	HDPE
6	Oil Res II
7	Haloarrest

### Armor

Code	Material
2	Aluminum Interlock
3	Steel Interlock

Standard lengths may be subject to tolerance. Custom lengths may be available upon request. Contact the Belden Electronics Division Customer Service Department for additional information. 1-800-BELDEN-1.



# UL Instrumentation Cable

## 600V Tray Cables


### Industrial Grade Sunlight- and Oil-Resistant Jackets

Description	Part No.	No. of Pairs	Color Code	Standard Lengths		Standard Unit Weight		Jacket Thickness		Nominal OD		Maximum Pull Tension		Minimum Bend Radius	
				Ft.	m	Lbs.	kg	Inch	mm	Inch	mm	Lbs.	N	Inch	mm

**18 AWG Pairs** Stranded (19x30) Tinned Copper Conductors • Twisted Pairs


**Unshielded • PVC/Nylon Insulation • Black PVC Jacket**

NEC: TC, NPLF ICEA S-73-532, ICEA S-61-402 ICEA T-29-520 FT4/IEEE 1202/383	<b>9486</b>	1	E2	1000	304.8	43.0	19.5	.048	1.22	.275	6.99	50	222	2.75	69.85
---	-------------	---	----	------	-------	------	------	------	------	------	------	----	-----	------	-------



**Overall Beldfoil® Shield (100% Coverage) • PVC/Nylon Insulation • Black PVC Jacket**


NEC: TC, NPLF ICEA S-73-532, ICEA S-61-402 ICEA T-29-520 FT4/IEEE 1202/383	<b>9341</b>	1	E2	500	152.4	22.0	10.0	.048	1.22	.276	7.01	63	280	2.75	69.85
				1000	304.8	43.0	19.5								



**18 AWG Pairs** Stranded (7x26) Bare Copper Conductors • Twisted Pairs


**Overall Beldfoil Shield (100% Coverage) • PVC/Nylon Insulation • Black PVC Jacket** (See chart below for other options)

NEC: TC, NPLF ICEA S-73-532 ICEA S-61-402 ICEA T-29-520 FT4/IEEE 1202/383	<b>1120A</b>	1	E2	10000 †	3048.0	450.0	204.3	.048	1.22	.278	7.06	59	262	2.80	71.12
	<b>3088A</b>	1	E1	10000 †	3048.0	510.0	231.3	.048	1.22	.278	7.06	67	298	2.80	71.12
	<b>1063A</b>	2	E1	10000 †	3048.0	790.0	358.3	.053	1.35	.407	10.34	112	498	4.10	104.14
	<b>1064A</b>	4	E1	7500 †	2286.0	892.5	404.8	.053	1.35	.470	11.94	202	899	4.70	119.38
	<b>1065A</b>	8	E1	7500 †	2286.0	1650.0	748.4	.064	1.63	.599	15.21	381	1695	6.00	152.40
	<b>1066A</b>	12	E1	5000 †	1524.0	1520.0	689.5	.064	1.63	.717	18.21	560	2491	7.20	182.88
	<b>1067A</b>	16	E1	5000 †	1524.0	1905.0	864.1	.064	1.63	.793	20.14	739	3287	8.00	203.20
	<b>1068A</b>	24	E1	2500 †	762.0	1487.5	674.7	.084	2.13	1.017	25.83	1098	4884	10.30	261.62
	<b>1087A</b>	36	E1	1250 †	381.0	1005.0	455.9	.084	2.13	1.178	29.97	1635	7273	11.70	297.18
	<b>1088A</b>	50	E1	Bulk ††	Bulk	—	—	.084	2.13	1.446	36.73	2262	10062	14.50	368.30



**Individually Shielded + Overall Beldfoil Shield (100% Coverage) • PVC/Nylon Insulation • Black PVC Jacket** (Options below)

NEC: TC, NPLF ICEA S-73-532 ICEA S-61-402 ICEA T-29-520 FT4/IEEE 1202/383	<b>1048A</b>	2	E1	7500 †	2286.0	622.5	282.4	.048	1.22	.381	9.68	140	623	3.80	96.52
	<b>1049A</b>	4	E1	7500 †	2286.0	1057.5	479.7	.053	1.35	.489	12.42	258	1148	4.90	124.46
	<b>1050A</b>	8	E1	7500 †	2286.0	1965.0	891.3	.064	1.63	.654	16.61	350	1557	6.60	167.64
	<b>1051A</b>	12	E1	5000 †	1524.0	1915.0	868.6	.064	1.63	.785	19.94	728	3238	7.90	200.66
	<b>1052A</b>	16	E1	2500 †	762.0	1267.5	574.9	.084	2.13	.898	22.81	963	4284	9.00	228.60
	<b>1053A</b>	24	E1	2500 †	762.0	1907.5	865.2	.084	2.13	1.115	28.32	1434	6379	11.10	281.94
	<b>1054A</b>	36	E1	1250 †	381.0	1270.0	576.1	.084	2.13	1.299	32.99	2139	9515	13.00	330.20
	<b>1038A</b>	50	E1	Bulk ††	Bulk	—	—	.084	2.13	1.527	38.79	2962	13176	15.30	388.62



E1, E2 = Refer to Technical Information section for color code. Alternate color coding available upon request. Multiple pair or triad cables have each pair/triad numbered for ease of identification.

†Final put-up length may vary ±10% from length shown.  
 ††Bulk = Check length available for specific construction.

**Conductor, Insulation and Jacket Options\*\***

To Specify:		
<b>1234</b>	<b>A</b>	<b>E</b>
Start with Part No.	Add or replace letter code for desired conductor, insulation & jacket	Add for Exposed Run rating if desired

Bare	Tinned	Insulation/Jacket
<b>A</b>	<b>B</b>	PVC-Nylon/PVC
<b>C</b>	<b>D</b>	XLPE/PVC
<b>E</b>	<b>F</b>	FRPO/PVC
<b>G</b>	<b>H</b>	XLPE/TPE
<b>K</b>	<b>L</b>	TPE/TPE
<b>M</b>	<b>N</b>	PVC-Nylon/Oil Res II
<b>Q</b>	<b>R</b>	XLPE/CPE
<b>S</b>	<b>T</b>	XLPE/Haloarrest®

\*\*For 1000 and 3000 Series cables only.



For more information, contact Belden Technical Support: 1-800-BELDEN-1 • www.belden.com

# UL Instrumentation Cable

## 600V Tray Cables


### Industrial Grade Sunlight- and Oil-Resistant Jackets

Description	Part No.	No. of Pairs/Triads	Color Code	Standard Lengths		Standard Unit Weight		Jacket Thickness		Nominal OD		Maximum Pull Tension		Minimum Bend Radius	
				Ft.	m	Lbs.	kg	Inch	mm	Inch	mm	Lbs.	N	Inch	mm

**18 AWG Pairs** Stranded (7x26) Bare Copper Conductors • Twisted Pairs


**Overall Beldfoil Shield (100% Coverage) • PVC/Nylon Insulation • Black PVC Jacket (Green Ground)**

<b>NEC:</b> TC-ER, NPLF ICEA S-73-532 ICEA S-61-402 ICEA T-29-520 FT4/IEEE 1202/383	<b>3088AE</b>	1	E1	1000	3048.0	63.0	28.6	.048	1.22	.340	8.64	80	356	3.40	86.36
				5000†	1524.0	320.0	145.3								



**Overall Beldfoil Shield (100% Coverage) • XLPE Insulation • Black PVC Jacket (Green Ground)**

<b>NEC:</b> TC-ER, NPLF ICEA S-73-532 ICEA S-66-524 ICEA T-29-520 FT4/IEEE 1202/383	<b>3088CE</b>	1	E1	1000	3048.0	66.0	30.0	.048	1.22	.340	8.64	80	356	3.40	86.36
				5000†	1524.0	375.0	170.3								




**18 AWG Triads** Stranded (7x26) Bare Copper Conductors • Twisted Triads

**Overall Beldfoil® Shield (100% Coverage) • PVC/Nylon Insulation • Black PVC Jacket (See chart below for other options)**

<b>NEC:</b> TC, NPLF ICEA S-73-532 ICEA S-61-402 ICEA T-29-520 FT4/IEEE 1202/383	<b>1121A</b>	1	E2	500†	152.4	27.5	12.5	.048	1.22	.282	7.16	90	400	2.75	69.85	
				1000†	304.8	53.0	24.0									
				10000†	3048.0	560.0	254.0									

	<b>3089A</b>	1	E1	10000†	3048.0	590.0	267.6	.048	1.22	.284	7.21	90	400	2.75	69.85
--	--------------	---	----	--------	--------	-------	-------	------	------	------	------	----	-----	------	-------



**Individually Shielded + Overall Beldfoil Shield (100% Coverage) • PVC/Nylon Insulation • Black PVC Jacket (Options below)**

<b>NEC:</b> TC, NPLF ICEA S-73-532 ICEA S-61-402 ICEA T-29-520 FT4/IEEE 1202/383	<b>3064A</b>	2	E1	Bulk††	Bulk	—	—	.048	1.22	.493	12.52	185	823	4.75	120.65
	<b>1093A</b>	4	E1	7500†	2286.0	1545.0	700.8	.063	1.60	.577	14.66	347	1544	6.00	152.40
	<b>1094A</b>	8	E1	5000†	1524.0	1755.0	796.1	.063	1.60	.745	18.92	672	2989	7.50	190.50
	<b>1095A</b>	12	E1	2500†	762.0	1320.0	598.8	.084	2.13	.944	23.98	997	4435	9.75	247.65
				5000†	1524.0	2875.0	1304.1								
	<b>3066A</b>	16	E1	Bulk††	Bulk	—	—	.084	2.13	1.046	26.57	1322	5881	10.50	266.70

	<b>1096A</b>	24	E1	Bulk††	Bulk	—	—	.084	2.13	1.284	32.61	1971	8767	13.00	330.20
--	--------------	----	----	--------	------	---	---	------	------	-------	-------	------	------	-------	--------



E1, E2 = Refer to Technical Information section for color code.  
 Alternate color coding available upon request.

Multiple pair or triad cables have each pair/triad numbered for ease of identification.

†Final put-up length may vary ±10% from length shown.

††Bulk = Check length available for specific construction.

**Conductor, Insulation and Jacket Options**

To Specify:			Bare	Tinned	Insulation/Jacket
<b>1234</b>	<b>A</b>	<b>E</b>	<b>A</b>	<b>B</b>	PVC-Nylon/PVC
Start with Part No.	Add or replace letter code for desired conductor, insulation & jacket	Add for Exposed Run rating if desired	<b>C</b>	<b>D</b>	XLPE/PVC
			<b>E</b>	<b>F</b>	FRPO/PVC
			<b>G</b>	<b>H</b>	XLPE/TPE
			<b>K</b>	<b>L</b>	TPE/TPE
			<b>M</b>	<b>N</b>	PVC-Nylon/Oil Res II
			<b>Q</b>	<b>R</b>	XLPE/CPE
			<b>S</b>	<b>T</b>	XLPE/Haloarrest®



# UL Instrumentation Cable

## 600V Tray Cables


### Industrial Grade Sunlight- and Oil-Resistant Jackets

Description	Part No.	No. of Pairs	Color Code	Standard Lengths		Standard Unit Weight		Jacket Thickness		Nominal OD		Maximum Pull Tension		Minimum Bend Radius	
				Ft.	m	Lbs.	kg	Inch	mm	Inch	mm	Lbs.	N	Inch	mm

**16 AWG Pairs** Stranded (19x29) Tinned Copper Conductors • Twisted Pairs


**Unshielded • PVC/Nylon Insulation • Black PVC Jacket**

NEC: TC, NPLF ICEA S-73-532, ICEA S-61-402 ICEA T-29-520 FT4/IEEE 1202/383	<b>9487</b>	1	E2	500	152.4	25.5	11.6	.048	1.22	.295	7.49	70	311	3.00	76.20
				1000	304.8	54.0	24.5								



**Overall Beldfoil® Shield (100% Coverage) • PVC/Nylon Insulation • Black PVC Jacket**


NEC: TC, NPLF ICEA S-73-532, ICEA S-61-402 ICEA T-29-520 FT4/IEEE 1202/383	<b>9342</b>	1	E2	500	152.4	27.5	12.7	.048	1.22	.296	7.52	105	467	3.00	76.20
				1000	304.8	56.0	25.4								



**16 AWG Pairs** Stranded (7x24) Bare Copper Conductors • Twisted Pairs


**Overall Beldfoil Shield (100% Coverage) • PVC/Nylon Insulation • Black PVC Jacket** (See chart below for other options)

NEC: TC, NPLF ICEA S-73-532 ICEA S-61-402 ICEA T-29-520 FT4/IEEE 1202/383	<b>1118A</b>	1	E2	10000 †	3048.0	550.0	249.5	.047	1.19	.294	7.47	105	467	3.00	76.20
	<b>3090A</b>	1	E1	2500 †	762.0	150.0	68.0	.047	1.19	.295	7.49	105	467	3.00	76.20
	<b>1069A</b>	2	E1	7500 †	2286.0	712.5	323.2	.047	1.19	.456	11.58	179	796	4.60	116.84
	<b>1527A</b>	3	E1	7500 †	2286.0	1042.5	472.9	.047	1.19	.482	12.24	241	1072	4.80	121.92
	<b>1070A</b>	4	E1	7500 †	2286.0	1357.5	615.8	.063	1.60	.560	14.22	321	1428	5.60	142.24
	<b>1071A</b>	8	E1	7500 †	2286.0	2242.5	1017.2	.063	1.60	.676	17.17	607	2700	6.80	172.72
	<b>1072A</b>	12	E1	5000 †	1524.0	1047.5	475.2	.063	1.60	.812	20.63	893	3972	8.10	205.74
	<b>1073A</b>	16	E1	2500 †	762.0	1442.5	654.3	.085	2.16	.946	24.03	1178	5240	9.30	236.22
	<b>1074A</b>	24	E1	1250 †	381.0	2115.0	959.4	.085	2.16	1.158	29.41	1749	7780	11.60	294.64
	<b>1089A</b>	36	E1	1250 †	381.0	1388.7	629.9	.085	2.16	1.321	33.55	2606	11592	13.20	335.28
	<b>1090A</b>	50	E1	Bulk ††	Bulk	—	—	.085	2.16	1.551	39.40	3606	16040	15.50	393.70



**Individually Shielded + Overall Beldfoil Shield (100% Coverage) • PVC/Nylon Insulation • Black PVC Jacket** (Options below)

NEC: TC, NPLF ICEA S-73-532 ICEA S-61-402 ICEA T-29-520 FT4/IEEE 1202/383	<b>1055A</b>	2	E1	7500 †	2286.0	885.0	401.8	.047	1.19	.476	12.09	223	992	4.16	105.66
	<b>1037A</b>	3	E1	7500 †	2286.0	1072.5	486.5	.047	1.19	.504	12.80	290	1290	5.00	127.0
	<b>1039A</b>	4	E1	7500 †	2286.0	1472.5	667.9	.063	1.60	.584	14.83	411	1828	5.80	147.32
	<b>1040A</b>	6	E1	5000 †	1524.0	1435.0	650.9	.063	1.60	.682	17.32	428	1904	6.80	172.72
	<b>1041A</b>	8	E1	5000 †	1524.0	1805.0	818.8	.063	1.60	.738	18.75	786	3496	7.40	187.96
	<b>1042A</b>	12	E1	2500 †	762.0	1327.5	602.2	.085	2.16	.935	23.75	1161	5164	9.40	238.76
	<b>1043A</b>	16	E1	2500 †	762.0	1765.0	800.6	.085	2.16	1.035	26.29	1537	6837	10.40	264.16
	<b>1044A</b>	20	E1	2500 †	762.0	2062.5	935.6	.085	2.16	1.146	29.11	1912	8505	11.50	292.10
	<b>1045A</b>	24	E1	1250 †	381.0	1241.3	563.1	.085	2.16	1.272	32.31	2287	10173	12.70	322.58
	<b>1046A</b>	36	E1	Bulk ††	Bulk	—	—	.085	2.16	1.454	36.93	3413	15182	14.50	368.30
	<b>1047A</b>	50	E1	Bulk ††	Bulk	—	—	.120	3.05	1.781	45.24	4726	21022	17.80	452.12



E1, E2 = Refer to Technical Information section for color code.  
Alternate color coding available upon request.

Multiple pair or triad cables have each pair/triad numbered for ease of identification.

†Final put-up length may vary ±10% from length shown.

††Bulk = Check length available for specific construction.

**To Specify:**

<b>1234</b>	<b>A</b>	<b>E</b>
Start with Part No.	Add or replace letter code for desired conductor, insulation & jacket	Add for Exposed Run rating if desired

**Conductor, Insulation and Jacket Options\*\***

Bare	Tinned	Insulation/Jacket
<b>A</b>	<b>B</b>	PVC-Nylon/PVC
<b>C</b>	<b>D</b>	XLPE/PVC
<b>E</b>	<b>F</b>	FRPO/PVC
<b>G</b>	<b>H</b>	XLPE/TPE
<b>K</b>	<b>L</b>	TPE/TPE
<b>M</b>	<b>N</b>	PVC-Nylon/Oil Res II
<b>Q</b>	<b>R</b>	XLPE/CPE
<b>S</b>	<b>T</b>	XLPE/Haloarrest®

\*\*For 1000 and 3000 Series cables only.



For more information, contact Belden Technical Support: 1-800-BELDEN-1 • www.belden.com

# UL Instrumentation Cable

## 600V Tray Cables


### Industrial Grade Sunlight- and Oil-Resistant Jackets

Description	Part No.	No. of Pairs/Triads	Color Code	Standard Lengths		Standard Unit Weight		Jacket Thickness		Nominal OD		Maximum Pull Tension		Minimum Bend Radius	
				Ft.	m	Lbs.	kg	Inch	mm	Inch	mm	Lbs.	N	Inch	mm

**16 AWG Pairs** Stranded (7x24) Bare Copper Conductors • Twisted Pairs


**Overall Beldfoil Shield (100% Coverage) • PVC/Nylon Insulation • Black PVC Jacket (Green Ground)**

NEC: TC-ER, NPLF ICEA S-73-532 ICEA S-61-402 ICEA T-29-520 FT4/IEEE 1202/383	3090AE	1	E1	1000	304.8	65.0	29.5	.048	1.22	.390	9.91	130	578	3.90	99.06
				5000 †	1524.0	340.0	154.4								



**Overall Beldfoil Shield (100% Coverage) • XLPE Insulation • Black PVC Jacket (Green Ground)**


NEC: TC-ER, NPLF ICEA S-73-532 ICEA S-66-524 ICEA T-29-520 FT4/IEEE 1202/383	3090CE	1	E1	1000	3048.0	81.0	39.8	.048	1.22	.390	9.91	130	578	3.90	99.06
				5000 †	1524.0	450.0	204.3								



**16 AWG Triads** Stranded (7x24) Bare Copper Conductors • Twisted Triads


**Overall Beldfoil® Shield (100% Coverage) • PVC/Nylon Insulation • Black PVC Jacket (See chart below for other options)**

NEC: TC, NPLF ICEA S-73-532 ICEA S-61-402 ICEA T-29-520 FT4/IEEE 1202/383	1119A	1	E2	500 †	152.4	35.0	15.9	.047	1.19	.310	7.87	129	574	3.10	78.74		
				1000 †	304.8	68.0	30.9										
				10000 †	3048.0	700.0	317.5										
				3091A	1	E1	10000 †	3048.0	750.0	340.2	.047	1.19	.310	7.87	129	574	3.10



**Individually Shielded + Overall Beldfoil Shield (100% Coverage) • PVC/Nylon Insulation • Black PVC Jacket (Options below)**

NEC: TC, NPLF ICEA S-73-532 ICEA S-61-402 ICEA T-29-520 FT4/IEEE 1202/383	1097A	4	E1	5000 †	1524.0	1415.0	641.8	.063	1.60	.640	16.26	554	2464	6.40	162.56
	1098A	8	E1	2500 †	762.0	1350.0	612.4	.085	2.16	.872	22.15	1072	4768	8.70	220.98
	1099A	12	E1	2500 †	762.0	1875.0	850.5	.085	2.16	1.047	26.59	1590	7073	10.50	266.70
	3118A	16	E1	Bulk ††	Bulk	—	—	.084	2.13	1.234	31.34	1771	7878	12.25	311.15
	1100A	24	E1	Bulk ††	Bulk	—	—	.085	2.16	1.434	36.42	3144	13985	14.30	363.22
	3130A	36	E1	Bulk ††	Bulk	—	—	.110	2.79	1.773	45.03	3600	16013	18.00	457.20



E1, E2 = Refer to Technical Information section for color code.

Alternate color coding available upon request.

Multiple pair or triad cables have each pair/triad numbered for ease of identification.

†Final put-up length may vary ±10% from length shown.

††Bulk = Check length available for specific construction.

**Conductor, Insulation and Jacket Options**

To Specify:			Bare	Tinned	Insulation/Jacket
<b>1234</b>	<b>A</b>	<b>E</b>	<b>A</b>	<b>B</b>	PVC-Nylon/PVC
Start with Part No.	Add or replace letter code for desired conductor, insulation & jacket	Add for Exposed Run rating if desired	<b>C</b>	<b>D</b>	XLPE/PVC
			<b>E</b>	<b>F</b>	FRPO/PVC
			<b>G</b>	<b>H</b>	XLPE/TPE
			<b>K</b>	<b>L</b>	TPE/TPE
			<b>M</b>	<b>N</b>	PVC-Nylon/Oil Res II
			<b>Q</b>	<b>R</b>	XLPE/CPE
			<b>S</b>	<b>T</b>	XLPE/Haloarrest®



# UL Instrumentation Cable

## 600V Tray Cables


### Industrial Grade Sunlight- and Oil-Resistant Jackets

Description	Part No.	No. of Pairs/Triads	Color Code	Standard Lengths		Standard Unit Weight		Jacket Thickness		Nominal OD		Maximum Pull Tension		Minimum Bend Radius	
				Ft.	m	Lbs.	kg	Inch	mm	Inch	mm	Lbs.	N	Inch	mm

**14 AWG Pairs** Stranded (42x30) Tinned Copper Conductors • Twisted Pairs


**Unshielded • PVC/Nylon Insulation • Black PVC Jacket**

NEC: TC, NPLF ICEA S-73-532 ICEA S-61-402 ICEA T-29-520 FT4/IEEE 1202/383	<b>9488</b>	1	E2	1000	304.8	77.0	34.9	.048	1.22	.359	9.12	107	476	3.75	95.25
---	-------------	---	----	------	-------	------	------	------	------	------	------	-----	-----	------	-------



**Overall Beldfoil® Shield (100% Coverage) • PVC/Nylon Insulation • Black PVC Jacket**


NEC: TC, NPLF ICEA S-73-532 ICEA S-61-402 ICEA T-29-520 FT4/IEEE 1202/383	<b>9343</b>	1	E2	500	152.4	42.5	19.1	.048	1.22	.358	9.09	160	712	3.75	95.25
				1000	304.8	86.0	39.0								



**14 AWG Pairs** Stranded (7x22) Bare Copper Conductors • Twisted Pairs

**Overall Beldfoil Shield (100% Coverage) • PVC/Nylon Insulation • Black PVC Jacket** (See chart below for other options)


NEC: TC, NPLF ICEA S-73-532 ICEA S-61-402 ICEA T-29-520 FT4/IEEE 1202/383	<b>3080A</b>	1	E1	Bulk*	Bulk*	—	—	.048	1.22	.342	8.69	160	712	3.50	88.90
---	--------------	---	----	-------	-------	---	---	------	------	------	------	-----	-----	------	-------



**14 AWG Triads** Stranded (7x22) Bare Copper Conductors • Twisted Triads

**Overall Beldfoil Shield (100% Coverage) • PVC/Nylon Insulation • Black PVC Jacket** (See chart below for other options)

NEC: TC, NPLF ICEA S-73-532 ICEA S-61-402 ICEA T-29-520 FT4/IEEE 1202/383	<b>3081A</b>	1	E1	Bulk*	Bulk*	—	—	.048	1.22	.361	9.17	200	890	3.50	88.90
---	--------------	---	----	-------	-------	---	---	------	------	------	------	-----	-----	------	-------



E1, E2 = Refer to Technical Information section for color code.  
 Alternate color coding available upon request.

\*Bulk = Check length available for specific construction.

To Specify:		
<b>1234</b>	<b>A</b>	<b>E</b>
Start with Part No.	Add or replace letter code for desired conductor, insulation & jacket	Add for Exposed Run rating if desired

**Conductor, Insulation and Jacket Options\*\***

Bare	Tinned	Insulation/Jacket
<b>A</b>	<b>B</b>	PVC-Nylon/PVC
<b>C</b>	<b>D</b>	XLPE/PVC
<b>E</b>	<b>F</b>	FRPO/PVC
<b>G</b>	<b>H</b>	XLPE/TPE
<b>K</b>	<b>L</b>	TPE/TPE
<b>M</b>	<b>N</b>	PVC-Nylon/Oil Res II
<b>Q</b>	<b>R</b>	XLPE/CPE
<b>S</b>	<b>T</b>	XLPE/Haloarrest®

\*\*For 1000 and 3000 Series cables only.



For more information, contact Belden Technical Support: 1-800-BELDEN-1 • www.belden.com



# UL Instrumentation Cable

## 600V Tray Cables


### Industrial Grade Sunlight- and Oil-Resistant Jackets

Description	Part No.	No. of Pairs/Triads	Color Code	Standard Lengths		Standard Unit Weight		Jacket Thickness		Nominal OD		Maximum Pull Tension		Minimum Bend Radius	
				Ft.	m	Lbs.	kg	Inch	mm	Inch	mm	Lbs.	N	Inch	mm

**12 AWG Pairs** Stranded (37x27) Tinned Copper Conductors • Twisted Pairs


**Unshielded • PVC/Nylon Insulation • Black PVC Jacket**

NEC: TC, NPLF ICEA S-73-532 ICEA S-61-402 ICEA T-29-520 FT4/IEEE 1202/383	<b>9489</b>	1	E2	1000	304.8	88.0	39.9	.045	1.14	.380	9.65	170	756	3.75	95.25
---	-------------	---	----	------	-------	------	------	------	------	------	------	-----	-----	------	-------



**Overall Beldfoil® Shield (100% Coverage) • PVC/Nylon Insulation • Black PVC Jacket**


NEC: TC, NPLF ICEA S-73-532 ICEA S-61-402 ICEA T-29-520 FT4/IEEE 1202/383	<b>9344</b>	1	E2	500	152.4	54.0	24.5	.045	1.14	.384	9.75	253	1125	3.75	95.25
				1000	304.8	111.0	50.4								



**12 AWG Pairs** Stranded (7x20) Bare Copper Conductors • Twisted Pairs

**Overall Beldfoil Shield (100% Coverage) • PVC/Nylon Insulation • Black PVC Jacket** (See chart below for other options)


NEC: TC, NPLF ICEA S-73-532 ICEA S-61-402 ICEA T-29-520 FT4/IEEE 1202/383	<b>3103A</b>	1	E1	Bulk*	Bulk*	—	—	.048	1.22	.380	9.65	253	1125	3.80	96.52
---	--------------	---	----	-------	-------	---	---	------	------	------	------	-----	------	------	-------



**12 AWG Triads** Stranded (7x20) Bare Copper Conductors • Twisted Triads

**Overall Beldfoil Shield (100% Coverage) • PVC/Nylon Insulation • Black PVC Jacket** (See chart below for other options)

NEC: TC, NPLF ICEA S-73-532 ICEA S-61-402 ICEA T-29-520 FT4/IEEE 1202/383	<b>3104A</b>	1	E1	Bulk*	Bulk*	—	—	.048	1.22	.401	10.19	315	1401	4.00	101.60
---	--------------	---	----	-------	-------	---	---	------	------	------	-------	-----	------	------	--------



E1, E2 = Refer to Technical Information section for color code.  
 Alternate color coding available upon request.

\*Bulk = Check length available for specific construction.

**Conductor, Insulation and Jacket Options\*\***

To Specify:			Bare	Tinned	Insulation/Jacket
<b>1234</b>	<b>A</b>	<b>E</b>	<b>A</b>	<b>B</b>	PVC-Nylon/PVC
Start with Part No.	Add or replace letter code for desired conductor, insulation & jacket	Add for Exposed Run rating if desired	<b>C</b>	<b>D</b>	XLPE/PVC
			<b>E</b>	<b>F</b>	FRPO/PVC
			<b>G</b>	<b>H</b>	XLPE/TPE
			<b>K</b>	<b>L</b>	TPE/TPE
			<b>M</b>	<b>N</b>	PVC-Nylon/Oil Res II
			<b>Q</b>	<b>R</b>	XLPE/CPE
			<b>S</b>	<b>T</b>	XLPE/Haloarrest®

\*\*For 1000 and 3000 Series cables only.



# UL Control Cable

## 600V Type TC Cables — Overview

### Introduction

Belden offers a wide selection of UL-rated 600V Tray Cable for a variety of control applications.

Multi-conductor versions are available as standards from 18 to 1 AWG. 1/0 through 4/0 are also available as custom made constructions. These are unshielded and shielded versions that come with various insulation and jacket combinations.

These TC cables are installed in cable trays, ducts and conduit and can be used in direct burial applications. They are extensively used in manufacturing facilities, especially in the process industries such as petrochemical, steel, pulp and paper, cement and mining.

These flexible, space efficient cables can be substantially more economical than traditional wiring methods.

### Construction

Soft annealed bare or tinned copper conductors, with various insulation and jacketing options as seen in chart below.

### Application

These cables are suitable for installation in wet or dry locations. Cable jackets are resistant to sunlight, moisture and vapor penetration. The cables can be used in raceways (supported by messenger wire), outdoor applications and direct burial applications.

### Unshielded

Cabled non-shielded conductors provide a minimal O.D. allowing greater tray and conduit fill. Non-shielded control cable may be utilized when recommended by the equipment manufacturer and used in a metallic conduit.

### Overall Shield

Recommended for use in control applications where signals are transmitted in excess of 100 millivolts, except in areas where high voltage and current sources create excessive noise interference. The Beldfoil® shield with drain wire provides 100% coverage for maximum shield effectiveness. Copper tape shield available upon request.

Only 2-conductor round constructions can be shielded. Flat constructions cannot be shielded.

### Tray Cable Construction Options

Insulation/Jacket	UL Listed for MC and TC		Flame Tests	Ratings*
	Max. Temp Rating			
	Wet	Dry		
PVC-Nylon/PVC (THHN or THWN) 14 AWG & larger	75°C	90°C	UL 1685 FT4/IEEE 1202/383 ICEA T-29-520	ICEA S-73-532 ICEA S-95-658 ICEA S-61-402
PVC-Nylon/PVC (TFN or TFFN) 16 & 18 AWG	NA	90°C	UL 1685 FT4/IEEE 1202/383 ICEA T-29-520	ICEA S-73-532 ICEA S-95-658 ICEA S-61-402
XLPE/PVC or CPE (XHHW-2) 14 AWG & larger	90°C	90°C	UL 1685 FT4/IEEE 1202/383 VW-1 rated singles ICEA T-29-520	ICEA S-73-532 ICEA S-95-658 ICEA S-66-524
XLPE/PVC or CPE (RFH-2) 16 & 18 AWG	75°C	75°C	UL 1685 FT4/IEEE 1202/383 VW-1 rated singles ICEA T-29-520	ICEA S-73-532 ICEA S-95-658 ICEA S-66-524
FRPO/PVC 18 AWG & larger	—	75°C	UL 1685	
TPE/TPE	75°C	90°C	UL 1685	
FRPO/PVC	75°C	90°C	UL 1685	
XLPE/Haloarrest® (XHHW-2) 14 AWG & larger	90°C	90°C	UL 1685 FT4/IEEE 1202/383 ICEA T-29-520	TC-LS
XLPE/Haloarrest (RFH-2) 16 & 18 AWG	75°C	75°C	UL 1685 FT4/IEEE 1202/383 ICEA T-29-520	TC-LS
FEP/PVC	90°C	90°C	UL 1685	

CPE = Chlorinated Polyethylene • FEP = Fluorinated Ethylene-propylene • FRPO = Flame-retardant Polyolefin • PVC = Polyvinyl Chloride • TPE = Thermoplastic Elastomer • XLPE = Cross-linked Polyethylene

\*Applicable to TC-rated cables only.

### Ground Wire

- Non-insulated, bare copper ground wires are included for constructions 8 through 1 AWG. Non-insulated, bare copper, full sized ground wires may be requested on other constructions.
- All shielded PVC-Nylon/PVC constructions include full sized ground (drain) wires.

### Color Code

Multi-conductor control cables (10 AWG to 18 AWG) are printed alpha-numerically in addition to being color coded per ICEA Table E2.

8 AWG and larger are black and numbered per ICEA Method 4.

Refer to Technical Information Section for ICEA color code charts.

### Specifications

- UL Subject 1277 Type TC
- XLPE/Haloarrest jacketed cables are UL 1277 TC-LS rated
- UL Subject 1424 (per outline for NPLF requirements dated May 3, 1979)
- UL 1685 (UL 1581) Vertical Flame Test comparable to IEEE 383-1974 (70,000 BTU/hr) Flame Test

- Approved for cable tray use in Class 1, Division 2 areas, per NEC Articles 340, 318 and 501, and for Class 1 circuits as permitted in Article 725
- PVC-Nylon/PVC, XLPE/PVC and XLPE/CPE constructed cables meet IEEE 1202/IEEE 383-2003/FT4 (70,000 BTU/hr) Flame Test

### TC-ER Rated Cables

As an option, Belden offers all PVC-nylon/PVC, XLPE/PVC and XLPE/CPE jacketed tray cables with a TC-ER (Exposed Run) rating, formerly referred to as Open Wiring.

Per NEC Article 336, a TC-ER rated cable may be installed in an industrial establishment between a cable tray and the utilization equipment or device. A TC-ER rated cable must meet the crush and impact requirements of UL Type MC cable. By eliminating the need for metal conduit and/or armor, using a TC-ER rated cable results in savings in both installation and maintenance.

Standard lengths may be subject to tolerance. Custom lengths may be available upon request. Contact the Belden Electronics Division Customer Service Department for additional information. 1-800-BELDEN-1

# UL Control Cable

600V Type TC Cables


Industrial Grade Sunlight- and Oil-Resistant Jackets

Description	Part No.	No. of Cond.	Color Code	Standard Lengths		Weight		Jacket Thickness		Nominal OD		Maximum Pull Tension		Minimum Bend Radius	
				Ft.	m	Lbs./1000'	kg/km	Inch	mm	Inch	mm	Lbs.	N	Inch	mm

**18 AWG Multi-conductor** Stranded (7x26) Bare Copper Conductors

**PVC/Nylon Insulation and PVC Jacket Constructions** (See chart below for other options)

NEC: TC, NPLF  
 FT4/IEEE 1202/383  
 ICEA S-73-532  
 ICEA S-95-658  
 ICEA S-61-402  
 ICEA T-29-520




<b>27916A</b> <sup>†</sup>	2	E2	Bulk	Bulk	33.0	49.1	.045	1.14	.180 x .266	4.57 x 6.76	44	195.8	2.7	68.58
<b>27325A</b> <sup>††</sup>	2	E2	Bulk	Bulk	34.0	50.6	.045	1.14	.270	6.86	44	195.8	2.7	68.58
<b>27334A</b>	3	E2	Bulk	Bulk	45.0	67.0	.045	1.14	.280	7.11	66	293.7	2.8	71.12
<b>27326A</b>	4	E2	Bulk	Bulk	52.0	77.4	.045	1.14	.310	7.87	88	391.6	3.1	78.74
<b>27335A</b>	5	E2	Bulk	Bulk	62.0	92.3	.045	1.14	.330	8.38	110	489.5	3.3	83.82
<b>27600A</b>	6	E2	Bulk	Bulk	72.0	107.2	.045	1.14	.350	8.89	132	587.4	3.5	88.90
<b>27327A</b>	7	E2	Bulk	Bulk	79.0	117.6	.045	1.14	.350	8.89	154	685.3	3.5	88.90
<b>27601A</b>	8	E2	Bulk	Bulk	89.0	132.5	.045	1.14	.390	9.83	176	783.2	3.8	96.52
<b>27336A</b>	9	E2	Bulk	Bulk	104.0	154.8	.045	1.14	.410	10.41	198	881.1	4.1	104.14
<b>27328A</b>	10	E2	Bulk	Bulk	111.0	165.2	.060	1.52	.450	11.43	220	979.0	4.5	114.30
<b>27602A</b>	11	E2	Bulk	Bulk	—	—	.060	1.52	.450	11.43	242	1076.9	4.5	114.30
<b>27329A</b>	12	E2	Bulk	Bulk	127.0	189.0	.060	1.52	.450	11.43	264	1174.8	4.5	114.30
<b>27603A</b>	13	E2	Bulk	Bulk	142.0	211.3	.060	1.52	.470	11.94	286	1272.7	4.7	119.38
<b>27604A</b>	14	E2	Bulk	Bulk	—	—	.060	1.52	.480	12.19	308	1370.6	4.8	121.92
<b>27605A</b>	15	E2	Bulk	Bulk	175.0	260.4	.060	1.52	.510	12.95	330	1468.5	5.1	129.54
<b>27606A</b>	16	E2	Bulk	Bulk	167.0	248.5	.060	1.52	.500	12.70	352	1566.4	5.0	127.00
<b>27607A</b>	17	E2	Bulk	Bulk	—	—	.060	1.52	.570	14.48	374	1664.3	5.7	144.78
<b>27608A</b>	18	E2	Bulk	Bulk	196.0	291.7	.060	1.52	.570	14.48	396	1762.2	5.7	144.78
<b>27609A</b>	19	E2	Bulk	Bulk	202.0	300.6	.060	1.52	.570	14.48	418	1860.1	5.7	144.78
<b>27610A</b>	20	E2	Bulk	Bulk	214.0	318.5	.060	1.52	.600	15.24	440	1958.0	5.9	149.86
<b>27611A</b>	25	E2	Bulk	Bulk	258.0	384.0	.060	1.52	.660	16.76	550	2447.5	6.6	167.64
<b>27612A</b>	30	E2	Bulk	Bulk	300.0	446.5	.060	1.52	.690	17.53	660	2937.0	6.6	167.64
<b>27613A</b>	37	E2	Bulk	Bulk	360.0	535.8	.080	2.03	.740	18.80	814	3622.3	7.4	187.96
<b>27614A</b>	50	E2	Bulk	Bulk	511.0	760.5	.080	2.03	.910	23.11	1100	4895.0	9.1	231.14
<b>27632A</b>	60	E2	Bulk	Bulk	627.0	933.1	.080	2.03	.960	24.38	1320	5874.0	9.6	243.84

**18 AWG Multi-conductor** Stranded (7x26) Bare Copper Conductors • Overall Beldfoil® Shield (100% Coverage) with Drain Wire

**PVC/Nylon Insulation and PVC Jacket Constructions** (See chart below for other options)

NEC: TC, NPLF  
 FT4/IEEE 1202/383  
 ICEA S-73-532  
 ICEA S-95-658  
 ICEA S-61-402  
 ICEA T-29-520



<b>27325AS</b>	2	E2	Bulk	Bulk	34.0	50.6	.045	1.14	.270	6.86	67	298	2.70	68.58
<b>27334AS</b>	3	E2	Bulk	Bulk	45.0	67.0	.045	1.14	.280	7.11	90	400	2.80	71.12
<b>27326AS</b>	4	E2	Bulk	Bulk	60.0	89.3	.045	1.14	.300	7.62	112	498	3.10	81.28

E2 = Refer to Technical Information section for color code.

<sup>†</sup> Flat construction; overall shield not available.

<sup>††</sup> Twisted Conductors.

Bulk = 5000 ft. or 10,000 ft. put-up one piece, ±10%. Check length available for specific construction.

**Conductor, Insulation and Jacket Options**

To Specify:		
<b>12345</b>	<b>A</b>	<b>S</b>
Start with core Part No.	add Conductor, Insulation, Jacket type	add "S" for optional Beldfoil Shield

Bare	Tinned	Insulation/Jacket
<b>A</b>	<b>B</b>	PVC-Nylon/PVC
<b>C</b>	<b>D</b>	XLPE/PVC
<b>E</b>	<b>F</b>	FRPO/PVC
<b>G</b>	<b>H</b>	XLPE/TPE
<b>K</b>	<b>L</b>	TPE/TPE
<b>M</b>	<b>N</b>	PVC-Nylon/Oil Res II
<b>Q</b>	<b>R</b>	XLPE/CPE
<b>S</b>	<b>T</b>	XLPE/Haloarrest®

Note: To specify TC-ER (Exposed Run) rated control cable, simply replace the second digit of the part number from a Z to an 8. For example: 2Z080A with TC-ER rating becomes 28080A.



# UL Control Cable


600V Type TC Cables

Industrial Grade Sunlight- and Oil-Resistant Jackets

Description	Part No.	No. of Cond.	Color Code	Standard Lengths		Weight		Jacket Thickness		Nominal OD		Maximum Pull Tension		Minimum Bend Radius	
				Ft.	m	Lbs./1000'	kg/km	Inch	mm	Inch	mm	Lbs.	N	Inch	mm


**16 AWG Multi-conductor** Stranded (7x24) Bare Copper Conductors

PVC/Nylon Insulation and PVC Jacket Constructions (See chart below for other options)															
NEC: TC, NPLF FT4/IEEE 1202/383 ICEA S-73-532 ICEA S-95-658 ICEA S-61-402 ICEA T-29-520	27917A†	2	E2	Bulk	Bulk	42.0	62.5	.045	1.14	.190 x .290	4.83 x 7.37	70	312	2.9	73.66
	27337A††	2	E2	Bulk	Bulk	45.0	67.0	.045	1.14	.299	7.60	70	312	2.9	73.66
	27331A	3	E2	Bulk	Bulk	55.0	81.9	.045	1.14	.307	7.80	105	467	3.1	78.74
	27338A	4	E2	Bulk	Bulk	69.0	102.7	.045	1.14	.332	8.18	140	623	3.3	83.82
	27339A	5	E2	Bulk	Bulk	83.0	123.5	.045	1.14	.360	9.14	175	779	3.6	91.44
	27615A	6	E2	Bulk	Bulk	96.0	142.9	.045	1.14	.390	9.91	210	935	3.9	99.06
	27323A	7	E2	Bulk	Bulk	106.0	157.7	.045	1.14	.390	9.91	245	1090	3.9	99.06
	27616A	8	E2	Bulk	Bulk	122.0	181.6	.045	1.14	.420	10.67	280	1246	4.2	106.68
	27340A	9	E2	Bulk	Bulk	138.0	200.4	.045	1.14	.450	11.43	315	1402	4.5	114.30
	27617A	10	E2	Bulk	Bulk	149.0	221.7	.045	1.14	.490	12.45	350	1558	4.9	124.46
	27618A	11	E2	Bulk	Bulk	161.0	239.6	.045	1.14	.490	12.45	385	1713	4.9	124.46
	27341A	12	E2	Bulk	Bulk	174.0	258.9	.045	1.14	.500	12.70	420	1869	5.0	127.00
	27619A	13	E2	Bulk	Bulk	203.0	302.1	.045	1.14	.570	14.48	455	2025	5.7	144.78
	27620A	14	E2	Bulk	Bulk	223.0	331.8	.045	1.14	.570	14.48	490	2181	5.7	144.78
	27621A	15	E2	Bulk	Bulk	229.0	340.8	.060	1.52	.590	14.99	525	2336	5.9	149.86
	27330A	16	E2	Bulk	Bulk	241.0	358.7	.045	1.14	.600	15.24	560	2492	6.0	152.40
	27622A	17	E2	Bulk	Bulk	267.0	397.3	.060	1.52	.630	16.00	595	2648	6.3	160.02
	27623A	18	E2	Bulk	Bulk	—	—	.060	1.52	.630	16.00	630	2804	6.3	160.02
	27624A	19	E2	Bulk	Bulk	287.0	427.1	.060	1.52	.630	16.00	665	2959	6.3	160.02
	27625A	20	E2	Bulk	Bulk	304.0	452.4	.060	1.52	.660	16.76	700	3115	6.6	167.64
	27324A	25	E2	Bulk	Bulk	367.0	546.1	.080	2.03	.730	18.54	875	3894	7.3	185.42
	27626A	30	E2	Bulk	Bulk	428.0	636.9	.080	2.03	.770	19.56	1050	4673	7.7	195.58
	27627A	37	E2	Bulk	Bulk	514.0	764.8	.080	2.03	.830	21.08	1295	5763	8.3	210.82
	27628A	50	E2	Bulk	Bulk	723.0	1075.8	.080	2.03	1.000	25.40	1750	7788	10.0	254.00
	27633A	60	E2	Bulk	Bulk	844.0	1255.9	.080	2.03	1.100	27.94	2100	9345	11.0	279.40



**16 AWG Multi-conductor** Stranded (7x24) Bare Copper Conductors • Overall Beldfoil® Shield (100% Coverage) with Drain Wire

PVC/Nylon Insulation and PVC Jacket Constructions (See chart below for other options)															
NEC: TC, NPLF FT4/IEEE 1202/383 ICEA S-73-532 ICEA S-95-658 ICEA S-61-402 ICEA T-29-520	27337AS	2	E2	Bulk	Bulk	45.0	67.0	.045	1.14	.302	7.67	94	418	3.00	76.20
	27331AS	3	E2	Bulk	Bulk	55.0	81.8	.045	1.14	.320	8.13	130	578	3.20	81.28



E2 = Refer to Technical Information section for color code.

† Flat construction; overall shield not available.

†† Twisted Conductors.

Bulk = 5000 ft. or 10,000 ft. put-up one piece, ±10%. Check length available for specific construction.

To Specify:		
<b>12345</b>	<b>A</b>	<b>S</b>
Start with core Part No.	add Conductor, Insulation, Jacket type	add "S" for optional Beldfoil Shield

Note: To specify TC-ER (Exposed Run) rated control cable, simply replace the second digit of the part number from a 7 to an 8. For example: 27080A with TC-ER rating becomes 28080A.

**Conductor, Insulation and Jacket Options**

Bare	Tinned	Insulation/Jacket
<b>A</b>	<b>B</b>	PVC-Nylon/PVC
<b>C</b>	<b>D</b>	XLPE/PVC
<b>E</b>	<b>F</b>	FRPO/PVC
<b>G</b>	<b>H</b>	XLPE/TPE
<b>K</b>	<b>L</b>	TPE/TPE
<b>M</b>	<b>N</b>	PVC-Nylon/Oil Res II
<b>Q</b>	<b>R</b>	XLPE/CPE
<b>S</b>	<b>T</b>	XLPE/Haloarrest®



For more information, contact Belden Technical Support: 1-800-BELDEN-1 • www.belden.com

# UL Control Cable

600V Type TC Cables


Industrial Grade Sunlight- and Oil-Resistant Jackets

Description	Part No.	No. of Cond.	Color Code	Standard Lengths		Weight		Jacket Thickness		Nominal OD		Maximum Pull Tension		Minimum Bend Radius	
				Ft.	m	Lbs./1000'	kg/km	Inch	mm	Inch	mm	Lbs.	N	Inch	mm

**14 AWG Multi-conductor** Stranded (7x22) Bare Copper Conductors

**PVC/Nylon Insulation and PVC Jacket Constructions** (See chart below for other options)


NEC: TC, NPLF FT4/IEEE 1202/383 ICEA S-73-532 ICEA S-95-658 ICEA S-61-402 ICEA T-29-520	<b>27080A</b> †	2	E2	1000 Bulk	304.8 Bulk	61.0 61.0	27.7 27.7	.045	1.14	.210 x .320	5.33 x 8.13	108	481	3.5	88.90
	<b>27636A</b> ††	2	E2	Bulk	Bulk	62.0	92.3	.045	1.14	.320	8.13	108	481	3.2	81.28
	<b>27081A</b>	3	E2	1000 Bulk	304.8 Bulk	86.0 86.0	39.0 39.0	.045	1.14	.340	8.64	162	721	3.4	86.36
	<b>27082A</b>	4	E2	1000 Bulk	304.8 Bulk	110.0 110.0	49.9 49.9	.045	1.14	.360	9.14	216	961	3.6	91.44
	<b>27083A</b>	5	E2	Bulk	Bulk	118.0	175.6	.045	1.14	.400	10.16	270	1202	3.9	99.06
	<b>27084A</b>	6	E2	Bulk	Bulk	140.0	208.3	.045	1.14	.434	11.02	324	1442	4.3	109.22
	<b>27085A</b>	7	E2	Bulk	Bulk	153.0	227.7	.045	1.14	.433	11.00	378	1682	4.3	109.22
	<b>27086A</b>	8	E2	Bulk	Bulk	173.0	257.5	.045	1.14	.480	12.19	432	1922	4.7	119.38
	<b>27087A</b>	9	E2	Bulk	Bulk	196.0	291.7	.045	1.14	.510	12.95	486	2163	5.1	129.54
	<b>27088A</b>	10	E2	Bulk	Bulk	230.0	342.3	.060	1.52	.588	14.94	540	2403	5.7	144.78
	<b>27089A</b>	11	E2	Bulk	Bulk	251.0	373.6	.060	1.52	.595	15.11	594	2643	5.9	149.86
	<b>27090A</b>	12	E2	Bulk	Bulk	270.0	401.8	.060	1.52	.595	15.11	648	2884	5.9	149.86
	<b>27091A</b>	13	E2	Bulk	Bulk	—	—	.060	1.52	.640	16.26	702	3124	6.3	160.02
	<b>27092A</b>	14	E2	Bulk	Bulk	308.0	458.3	.060	1.52	.640	16.26	756	3364	6.3	160.02
	<b>27093A</b>	15	E2	Bulk	Bulk	330.0	491.1	.060	1.52	.670	17.02	810	3605	6.7	170.18
	<b>27094A</b>	16	E2	Bulk	Bulk	343.0	510.5	.060	1.52	.671	17.04	864	3845	6.6	167.64
	<b>27095A</b>	17	E2	Bulk	Bulk	—	—	.060	1.52	.700	17.78	918	4085	7.0	177.80
	<b>27096A</b>	18	E2	Bulk	Bulk	—	—	.060	1.52	.700	17.78	972	4325	7.0	177.80
	<b>27097A</b>	19	E2	Bulk	Bulk	396.0	589.3	.060	1.52	.705	17.91	1026	4566	7.0	177.80
	<b>27098A</b>	20	E2	Bulk	Bulk	425.0	632.5	.060	1.52	.735	18.67	1080	4806	7.4	187.96
	<b>27099A</b>	21	E2	Bulk	Bulk	438.0	651.7	.060	1.52	.740	18.80	1134	5046	7.4	187.96
	<b>27100A</b>	22	E2	Bulk	Bulk	—	—	.060	1.52	.760	19.30	1188	5287	7.6	193.04
	<b>27101A</b>	23	E2	Bulk	Bulk	—	—	.060	1.52	.760	19.30	1242	5527	7.6	193.04
	<b>27102A</b>	24	E2	Bulk	Bulk	495.0	736.7	.060	1.52	.810	20.57	1296	5767	8.1	205.74
	<b>27103A</b>	25	E2	Bulk	Bulk	560.0	833.4	.060	1.52	.810	20.57	1350	6008	8.1	205.74
	<b>27104A</b>	26	E2	Bulk	Bulk	—	—	.060	1.52	.810	20.57	1404	6248	8.1	205.74
	<b>27105A</b>	27	E2	Bulk	Bulk	587.0	873.5	.080	2.03	.870	22.10	1458	6488	8.7	220.98
	<b>27106A</b>	28	E2	Bulk	Bulk	—	—	.080	2.03	.910	23.11	1512	6728	9.1	231.14
	<b>27107A</b>	29	E2	Bulk	Bulk	680.0	1012.0	.080	2.03	.910	23.11	1566	6969	9.1	231.14
	<b>27108A</b>	30	E2	Bulk	Bulk	639.0	950.8	.080	2.03	.902	22.91	1620	7209	9.0	228.60
	<b>27629A</b>	37	E2	Bulk	Bulk	768.0	1142.9	.080	2.03	.975	24.77	1998	8891	9.7	246.38
	<b>27912A</b>	50	E2	Bulk	Bulk	1080.0	1607.3	.080	2.03	1.138	28.91	2700	12015	11.3	287.02



**14 AWG Multi-conductor** Stranded (7x22) Bare Copper Conductors • Overall Beldfoil® Shield (100% Coverage) with Drain Wire

**PVC/Nylon Insulation and PVC Jacket Constructions** (See chart below for other options)

NEC: TC, NPLF FT4/IEEE 1202/383 ICEA S-73-532, ICEA S-95-658 ICEA S-61-402, ICEA T-29-520	<b>27081AS</b>	3	E2	Bulk	Bulk	80.0	119.1	.045	1.14	.340	8.64	99	440	3.4	86.36
	<b>27082AS</b>	4	E2	Bulk	Bulk	105.0	156.3	.045	1.14	.391	9.93	273	1214	3.9	99.06



E2 = Refer to Technical Information section for color code.

† Flat construction; overall shield not available.

†† Twisted Conductors.

Bulk = 5000 ft. or 10,000 ft. put-up one piece, ±10%. Check length available for specific construction.

**Conductor, Insulation and Jacket Options**

To Specify:		
<b>12345</b>	<b>A</b>	<b>S</b>
Start with core Part No.	add Conductor, Insulation, Jacket type	add "S" for optional Beldfoil Shield

Bare	Tinned	Insulation/Jacket
<b>A</b>	<b>B</b>	PVC-Nylon/PVC
<b>C</b>	<b>D</b>	XLPE/PVC
<b>E</b>	<b>F</b>	FRPO/PVC
<b>G</b>	<b>H</b>	XLPE/TPE
<b>K</b>	<b>L</b>	TPE/TPE
<b>M</b>	<b>N</b>	PVC-Nylon/Oil Res II
<b>Q</b>	<b>R</b>	XLPE/CPE
<b>S</b>	<b>T</b>	XLPE/Haloarrest®

Note: To specify TC-ER (Exposed Run) rated control cable, simply replace the second digit of the part number from a 7 to an 8. For example: 27080A with TC-ER rating becomes 28080A.



# UL Control Cable

600V Type TC Cables


Industrial Grade Sunlight- and Oil-Resistant Jackets

Description	Part No.	No. of Cond.	Color Code	Standard Lengths		Weight		Jacket Thickness		Nominal OD		Maximum Pull Tension		Minimum Bend Radius	
				Ft.	m	Lbs./1000'	kg/km	Inch	mm	Inch	mm	Lbs.	N	Inch	mm

**12 AWG Multi-conductor** Stranded (7x20) Bare Copper Conductors

**PVC/Nylon Insulation and PVC Jacket Constructions** (See chart below for other options)

NEC: TC, NPLF  
 FT4/IEEE 1202/383  
 ICEA S-73-532  
 ICEA S-95-658  
 ICEA S-61-402  
 ICEA T-29-520



	<b>27109A</b> <sup>†</sup>	2	E2	1000 Bulk	304.8 Bulk	74.0 74.0	110.0 110.0	.045	1.14	.220 x .350	5.59 x 8.89	172	765	3.5	88.90
	<b>27641A</b> <sup>††</sup>	2	E2	Bulk	Bulk	86.0	128.0	.045	1.14	.360	9.14	172	765	3.6	91.44
	<b>27110A</b>	3	E2	1000 Bulk	304.8 Bulk	110.0 110.0	163.7 163.7	.045	1.14	.374	9.50	258	1148	3.7	93.98
	<b>27111A</b>	4	E2	1000 Bulk	304.8 Bulk	134.0 134.0	199.0 199.0	.045	1.14	.410	10.41	344	1531	4.1	104.14
	<b>27112A</b>	5	E2	Bulk	Bulk	165.0	245.6	.045	1.14	.450	11.43	430	1914	4.5	114.30
	<b>27113A</b>	6	E2	Bulk	Bulk	197.0	293.2	.045	1.14	.480	12.19	516	2296	4.8	121.92
	<b>27114A</b>	7	E2	Bulk	Bulk	216.0	321.5	.045	1.14	.480	12.19	602	2679	4.8	121.92
	<b>27115A</b>	8	E2	Bulk	Bulk	263.0	391.4	.060	1.52	.560	14.22	688	3062	5.6	142.24
	<b>27116A</b>	9	E2	Bulk	Bulk	297.0	442.0	.060	1.52	.600	15.24	774	3444	6.0	152.40
	<b>27117A</b>	10	E2	Bulk	Bulk	324.0	482.2	.060	1.52	.660	16.76	860	3827	6.6	167.64
	<b>27118A</b>	11	E2	Bulk	Bulk	—	—	.060	1.52	.670	17.02	946	4210	6.7	170.18
	<b>27119A</b>	12	E2	Bulk	Bulk	378.0	562.5	.060	1.52	.670	17.02	1032	4592	6.7	170.18
	<b>27120A</b>	13	E2	Bulk	Bulk	—	—	.060	1.52	.700	17.78	1118	4975	7.0	177.80
	<b>27121A</b>	14	E2	Bulk	Bulk	—	—	.060	1.52	.700	17.78	1204	5358	7.0	177.80
	<b>27122A</b>	15	E2	Bulk	Bulk	468.0	696.5	.060	1.52	.740	18.80	1290	5741	7.4	187.96
	<b>27123A</b>	16	E2	Bulk	Bulk	490.0	729.2	.060	1.52	.750	19.05	1376	6123	7.5	190.50
	<b>27124A</b>	17	E2	Bulk	Bulk	—	—	.060	1.52	.770	19.56	1462	6506	7.7	195.58
	<b>27125A</b>	18	E2	Bulk	Bulk	—	—	.060	1.52	.770	19.56	1548	6889	7.7	195.58
	<b>27126A</b>	19	E2	Bulk	Bulk	568.0	845.3	.060	1.52	.790	20.07	1634	7271	7.9	200.66
	<b>27127A</b>	20	E2	Bulk	Bulk	640.0	952.4	.080	2.03	.870	22.10	1720	7654	8.7	220.98
	<b>27128A</b>	21	E2	Bulk	Bulk	—	—	.080	2.03	.870	22.10	1806	8037	8.7	220.98
	<b>27129A</b>	22	E2	Bulk	Bulk	—	—	.080	2.03	.890	22.61	1892	8419	8.9	226.06
	<b>27130A</b>	23	E2	Bulk	Bulk	—	—	.080	2.03	.890	22.61	1978	8802	8.9	226.06
	<b>27131A</b>	24	E2	Bulk	Bulk	—	—	.080	2.03	.940	23.88	2064	9185	9.4	238.76
	<b>27132A</b>	25	E2	Bulk	Bulk	775.0	1153.4	.080	2.03	.960	24.38	2150	9568	9.6	243.84
	<b>27133A</b>	26	E2	Bulk	Bulk	—	—	.080	2.03	.960	24.38	2236	9950	9.6	243.84
	<b>27134A</b>	27	E2	Bulk	Bulk	828.0	1232.2	.080	2.03	.960	24.38	2322	10333	9.6	243.84
	<b>27135A</b>	28	E2	Bulk	Bulk	—	—	.080	2.03	.990	25.15	2408	10716	9.9	251.46
	<b>27136A</b>	29	E2	Bulk	Bulk	—	—	.080	2.03	.990	25.15	2494	11098	9.9	251.46
	<b>27137A</b>	30	E2	Bulk	Bulk	910.0	1354.3	.080	2.03	1.020	25.91	2580	11481	10.2	259.08
	<b>27630A</b>	37	E2	Bulk	Bulk	1100.0	1637.0	.080	2.03	1.090	27.69	3182	14160	10.9	276.86
	<b>27634A</b>	50	E2	Bulk	Bulk	1450.0	2157.9	.080	2.03	1.300	33.02	4300	19135	13.0	330.20

E2 = Refer to Technical Information section for color code.

<sup>†</sup> Flat construction; overall shield not available.

<sup>††</sup> Twisted Conductors.

Bulk = 5000 ft. or 10,000 ft. put-up one piece, ±10%. Check length available for specific construction.

**Conductor, Insulation and Jacket Options**

To Specify:		
<b>12345</b>	<b>A</b>	<b>S</b>
Start with core Part No.	add Conductor, Insulation, Jacket type	add "S" for optional Beldfoil <sup>®</sup> Shield

Bare	Tinned	Insulation/Jacket
<b>A</b>	<b>B</b>	PVC-Nylon/PVC
<b>C</b>	<b>D</b>	XLPE/PVC
<b>E</b>	<b>F</b>	FRPO/PVC
<b>G</b>	<b>H</b>	XLPE/TPE
<b>K</b>	<b>L</b>	TPE/TPE
<b>M</b>	<b>N</b>	PVC-Nylon/Oil Res II
<b>Q</b>	<b>R</b>	XLPE/CPE
<b>S</b>	<b>T</b>	XLPE/Haloarrest <sup>®</sup>

Note: To specify TC-ER (Exposed Run) rated control cable, simply replace the second digit of the part number from a Z to an 8. For example: 27080A with TC-ER rating becomes 28080A.



For more information, contact Belden Technical Support: 1-800-BELDEN-1 • www.belden.com



# UL Control Cable


## 600V Type TC Cables

### Industrial Grade Sunlight- and Oil-Resistant Jackets

Description	Part No.	No. of Cond.	Color Code	Standard Lengths		Weight		Jacket Thickness		Nominal OD		Maximum Pull Tension		Minimum Bend Radius	
				Ft.	m	Lbs./1000'	kg/km	Inch	mm	Inch	mm	Lbs.	N	Inch	mm


#### 10 AWG Multi-conductor Stranded (7x18) Bare Copper Conductors

PVC/Nylon Insulation and PVC Jacket Constructions (See chart below for other options)															
NEC: TC, NPLF FT4/IEEE 1202/383 ICEA S-73-532 ICEA S-95-658 ICEA S-61-402 ICEA T-29-520	27138A <sup>†</sup>	2	E2	Bulk	Bulk	83.0	123.5	.045	1.14	.260 x .420	6.60 x 10.67	296	1317	4.2	106.68
	27643A <sup>††</sup>	2	E2	Bulk	Bulk	131.0	195.0	.045	1.14	.420	10.67	296	1317	4.2	106.68
	27139A	3	E2	1000 Bulk	304.8 Bulk	164.0 164.0	244.0 244.0	.045	1.14	.450	11.43	444	1976	4.5	114.30
	27140A	4	E2	1000 Bulk	304.8 Bulk	216.0 216.0	321.0 321.0	.045	1.14	.490	12.45	592	2634	4.9	124.46
	27141A	5	E2	Bulk	Bulk	276.0	410.7	.060	1.52	.570	14.48	740	3293	5.7	144.78
	27142A	6	E2	Bulk	Bulk	329.0	489.6	.060	1.52	.620	15.75	888	3952	6.2	157.48
	27143A	7	E2	Bulk	Bulk	361.0	537.2	.060	1.52	.620	15.75	1036	4610	6.2	157.48
	27144A	8	E2	Bulk	Bulk	411.0	611.7	.060	1.52	.680	17.27	1184	5269	6.8	172.72
	27145A	9	E2	Bulk	Bulk	465.0	692.0	.060	1.52	.720	18.29	1332	5927	7.2	182.88
	27146A	10	E2	Bulk	Bulk	542.0	806.6	.060	1.52	.790	20.07	1480	6586	7.9	200.66
	27147A	11	E2	Bulk	Bulk	582.0	866.0	.060	1.52	.790	20.07	1628	7245	7.9	200.66
	27148A	12	E2	Bulk	Bulk	620.0	922.7	.080	2.03	.820	20.83	1776	7903	8.2	208.28



#### 8 AWG Multi-conductor Stranded (7x16) Bare Copper Conductors • 10 AWG Bare Copper Ground Wire


PVC/Nylon Insulation and PVC Jacket Constructions (See chart below for other options)															
NEC: TC, NPLF FT4/IEEE 1202/383 ICEA S-73-532 ICEA S-95-658 ICEA S-61-402 ICEA T-29-520	27149A	2	**	Bulk	Bulk	220.0	327.4	.060	1.52	.560	14.22	384	1709	5.6	142.24
	27150A	3	**	1000 Bulk	304.8 Bulk	354.0 354.0	527.0 527.0	.060	1.52	.590	14.99	576	2563	5.9	149.86
	27151A	4	**	Bulk	Bulk	394.0	327.4	.060	1.52	.650	16.51	768	3418	6.5	165.10



\*\*ICEA Method 4 Color Code

#### 6 AWG Multi-conductor Stranded (7x14) Bare Copper Conductors • 8 AWG Bare Copper Ground Wire

PVC/Nylon Insulation and PVC Jacket Constructions (See chart below for other options)															
NEC: TC, NPLF FT4/IEEE 1202/383 ICEA S-73-532 ICEA S-95-658 ICEA S-61-402 ICEA T-29-520	27152A	2	**	Bulk	Bulk	316.0	434.6	.060	1.52	.630	16.00	610	2715	6.3	160.02
	27153A	3	**	1000 Bulk	304.8 Bulk	477.0 477.0	710.0 710.0	.060	1.52	.670	17.02	915	4072	6.7	170.18
	27154A	4	**	Bulk	Bulk	519.0	759.0	.060	1.52	.730	18.54	1220	5429	7.3	185.42



\*\*ICEA Method 4 Color Code

E2 = Refer to Technical Information section for color code.

† Flat construction; overall shield not available.

†† Twisted Conductors.

Bulk = 5000 ft. or 10,000 ft. put-up one piece, ±10%. Check length available for specific construction.

#### Conductor, Insulation and Jacket Options

To Specify:		
<b>12345</b>	<b>A</b>	<b>S</b>
Start with core Part No.	add Conductor, Insulation, Jacket type	add "S" for optional Beldfoil® Shield

Bare	Tinned	Insulation/Jacket
A	B	PVC-Nylon/PVC
C	D	XLPE/PVC
E	F	FRPO/PVC
G	H	XLPE/TPE
K	L	TPE/TPE
M	N	PVC-Nylon/Oil Res II
Q	R	XLPE/CPE
S	T	XLPE/Haloarrest®

Note: To specify TC-ER (Exposed Run) rated control cable, simply replace the second digit of the part number from a Z to an 8. For example: 2Z080A with TC-ER rating becomes 28080A.



# UL Control Cable

600V Type TC Cables


Industrial Grade Sunlight- and Oil-Resistant Jackets

Description	Part No.	No. of Cond.	Color Code	Standard Lengths		Weight		Jacket Thickness		Nominal OD		Maximum Pull Tension		Minimum Bend Radius	
				Ft.	m	Lbs./1000'	kg/km	Inch	mm	Inch	mm	Lbs.	N	Inch	mm

**4 AWG Multi-conductor** Stranded (7x12) Bare Copper Conductors • 8 AWG Bare Copper Ground Wire

**PVC/Nylon Insulation and PVC Jacket Constructions** (See chart below for other options)

NEC: TC, NPLF FT4/IEEE 1202/383	<b>27155A</b>	2	**	Bulk	Bulk	455.0	677.1	.060	1.52	.770	19.56	970	4317	7.7	195.58
ICEA S-73-532	<b>27156A</b>	3	**	Bulk	Bulk	630.0	937.6	.080	2.03	.820	20.83	1455	6475	8.2	208.28
ICEA S-95-658 ICEA S-61-402 ICEA T-29-520	<b>27157A</b>	4	**	Bulk	Bulk	850.0	1265.0	.080	2.03	.950	24.13	1940	8633	9.5	241.30




\*\*ICEA Method 4 Color Code

**2 AWG Multi-conductor** Stranded (7x10) Bare Copper Conductors • 6 AWG Bare Copper Ground Wire

**PVC/Nylon Insulation and PVC Jacket Constructions** (See chart below for other options)

NEC: TC, NPLF FT4/IEEE 1202/383	<b>27158A</b>	2	**	Bulk	Bulk	716.0	1065.6	.080	2.03	.970	24.64	1544	6871	9.7	246.38
ICEA S-73-532	<b>27159A</b>	3	**	Bulk	Bulk	960.0	1428.7	.080	2.03	.990	25.15	2316	10306	9.9	251.46
ICEA S-95-658 ICEA S-61-402 ICEA T-29-520	<b>27160A</b>	4	**	Bulk	Bulk	1213.0	1805.2	.080	2.03	1.090	27.69	3088	13742	10.9	276.86




\*\*ICEA Method 4 Color Code

**1 AWG Multi-conductor** Stranded (19x14) Bare Copper Conductors • 6 AWG Bare Copper Ground Wire

**PVC/Nylon Insulation and PVC Jacket Constructions** (See chart below for other options)

NEC: TC, NPLF FT4/IEEE 1202/383	<b>27161A</b>	3	**	Bulk	Bulk	—	—	.080	2.03	1.120	28.45	2919	12990	11.2	284.48
ICEA S-73-532 ICEA S-95-658 ICEA S-61-402 ICEA T-29-520															



\*\*ICEA Method 4 Color Code

Bulk = 5000 ft. or 10,000 ft. put-up one piece, ±10%. Check length available for specific construction.

**Conductor, Insulation and Jacket Options**

To Specify:		
<b>12345</b>	<b>A</b>	<b>S</b>
Start with core Part No.	add Conductor, Insulation, Jacket type	add "S" for optional Beldfoil® Shield

Note: To specify TC-ER (Exposed Run) rated control cable, simply replace the second digit of the part number from a **Z** to an **8**. For example: **2Z080A** with TC-ER rating becomes **28080A**.


Bare	Tinned	Insulation/Jacket
<b>A</b>	<b>B</b>	PVC-Nylon/PVC
<b>C</b>	<b>D</b>	XLPE/PVC
<b>E</b>	<b>F</b>	FRPO/PVC
<b>G</b>	<b>H</b>	XLPE/TPE
<b>K</b>	<b>L</b>	TPE/TPE
<b>M</b>	<b>N</b>	PVC-Nylon/Oil Res II
<b>Q</b>	<b>R</b>	XLPE/CPE
<b>S</b>	<b>T</b>	XLPE/Haloarrest®




## UL Control Cable

### 600V Type MC Metal Clad and Teck-Style® Cables — Overview

#### Metal Clad

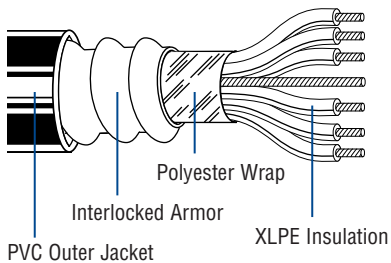

#### Teck-Style

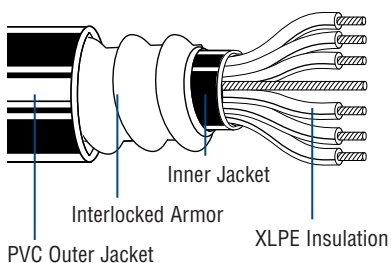

#### Introduction

Belden® Metal Clad (MC) and Teck-Style cables are designed to meet demanding industrial needs by combining rugged durability and corrosion resistance with flexibility and easy handling.

MC and Teck-Style cables are available in a wide range of constructions to meet the needs of pulp and paper, chemical, petroleum and other demanding industrial and resource industry environments. They are ideal for use in wet or dry areas; ventilated, non-ventilated or ladder-type cable troughs; ventilated flexible cableways; and for direct burial. Custom cables are available to meet exacting requirements.

Belden Type MC Cable is marked sunlight-resistant for cable tray use in direct burial designations, and cable constructions are listed to NEC Type MC.

Teck-Style cables are price-competitive, high-performance, UL and CSA dual-rated cables with a flame-retardant XHHW insulated conductor and an inner PVC jacket for mechanical moisture and corrosion protection.

#### Construction

Class B stranded bare copper conductors, cross-linked polyethylene insulation, bare copper ground wire, standard aluminum or optional galvanized steel interlocking armor, PVC outer jacket.

- Thermoset insulation — XHHW-2 conductors
- NEC conductor temperature 90°C dry and 90°C wet

#### Voltage Rating

14 AWG — 2 AWG: 600 Volt

#### Application

Type MC Cable is a general-purpose cable used in the pulp and paper, mining, petroleum and chemical industries as well as in commercial buildings.

MC Cable may be used under the following conditions:

- Exposed or concealed wiring in dry or wet conditions
- In ventilated, non-ventilated or ladder-type cable trays in dry or wet conditions
- On walls or beams
- Directly buried
- Class I and II Div. 2 and Class III Div. 1 and 2 hazardous locations

#### Minimum Bending Radius

12 times the overall cable diameter

#### Pulling Tensions

The combined use of Kellems grips and pulling eyes is recommended.

#### Design Advantages

##### Insulation Properties

- High tensile strength
- Impact- and crush-resistant
- Heat-resistant
- Excellent elongation
- Moisture-resistant
- Good low temperature properties
- 90°C dry and 90°C wet

##### Electrical Properties

- High insulation resistance
- Low dielectric loss
- High dielectric strength

##### Other Features

- Corrosion-resistant
- Versatile and flexible
- Provides cost savings as conduit and ducts are not required

#### Specifications

- UL 44
- UL 1569
- UL 1685 (UL 1581) Vertical Tray Flame Test (70,000 BTU/hr)

#### Tech-Style CSA Specifications

- CSA C22.2 #131
- FT4 Flame Test
- HAZ LOC
- CSA C22.2 #0.3 Clause 4.31 Low Acid Gas


# UL Control Cable

600V Type MC Metal Clad Cables


Industrial Grade Sunlight- and Oil-Resistant Jackets

Description	Part Number		No. of Cond.	Insulation Thickness		Outer Jacket Thickness		Armor OD		Nominal OD		Minimum Bend Radius	
	Aluminum Armor	Steel Armor		Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm

**14 AWG** Stranded (7x22) Bare Copper Conductors • 14 AWG Bare Copper Ground Wire

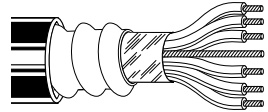Aluminum or Steel Interlocked Armor • Cross-linked Polyethylene Insulation • PVC Jacket													
NEC: MC 	27243	28243	2	.030	.76	.050	1.27	.48	12.19	.58	14.73	7.3	185.42
	27244	28244	3	.030	.76	.050	1.27	.50	12.70	.61	15.49	7.6	193.04
	27245	28245	4	.030	.76	.050	1.27	.54	13.72	.64	16.26	7.9	200.66
	27246	28246	5	.030	.76	.050	1.27	.57	14.48	.68	17.27	8.4	213.36
	27247	28247	6	.030	.76	.050	1.27	.62	15.75	.72	18.29	8.9	226.06
	27248	28248	7	.030	.76	.050	1.27	.62	15.75	.72	18.29	8.9	226.06
	27269	28269	8	.030	.76	.050	1.27	.69	17.53	.80	20.32	9.4	238.76
	27535	28535	9	.030	.76	.050	1.27	.70	17.78	.80	20.32	10.0	254.00
	27249	28249	10	.030	.76	.050	1.27	.75	19.05	.85	21.59	10.5	266.70
	27250	28250	12	.030	.76	.050	1.27	.77	19.56	.87	22.10	10.8	274.32
	27251	28251	15	.030	.76	.050	1.27	.87	22.10	.98	24.89	11.6	294.64
	27969	28969	19	.030	.76	.050	1.27	1.00	25.40	1.11	28.19	12.1	307.34
	27252	28252	20	.030	.76	.050	1.27	1.03	26.16	1.14	28.96	13.3	337.82
	27270	28270	25	.030	.76	.050	1.27	1.10	27.94	1.21	30.73	14.4	365.76
	27253	28253	30	.030	.76	.050	1.27	1.18	29.97	1.29	32.77	15.1	383.54
	27292	28292	37	.030	.76	.050	1.27	1.14	28.96	1.24	31.50	16.1	408.94
27433	28433	40	.030	.76	.050	1.27	1.28	32.51	1.40	35.56	16.7	424.18	
27434	28434	50	.030	.76	.050	1.27	1.40	35.56	1.52	38.61	18.4	467.36	

**12 AWG** Stranded (7x20) Bare Copper Conductors • 12 AWG Bare Copper Ground Wire

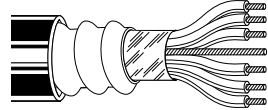Aluminum or Steel Interlocked Armor • Cross-linked Polyethylene Insulation • PVC Jacket													
NEC: MC 	27254	28254	2	.030	.76	.050	1.27	.52	13.21	.62	15.75	7.8	198.12
	27255	28255	3	.030	.76	.050	1.27	.54	13.72	.64	16.26	8.0	203.20
	27256	28256	4	.030	.76	.050	1.27	.58	14.73	.68	17.22	8.5	215.90
	27271	28271	5	.030	.76	.050	1.27	.62	15.75	.72	18.29	9.1	231.14
	27272	28272	6	.030	.76	.050	1.27	.67	17.02	.77	19.56	9.6	243.84
	27273	28273	7	.030	.76	.050	1.27	.67	17.02	.77	19.56	9.6	243.84
	27274	28274	8	.030	.76	.050	1.27	.77	19.56	.88	22.35	10.2	259.08
	27538	28538	9	.030	.76	.050	1.27	.76	19.30	.86	21.84	10.8	274.32
	27275	28275	10	.030	.76	.050	1.27	.80	20.32	.91	23.11	11.5	292.10
	27276	28276	12	.030	.76	.050	1.27	.84	21.34	.94	23.88	11.7	297.18
	27277	28277	15	.030	.76	.050	1.27	.94	23.88	1.05	26.67	13.4	340.36
	27539	28539	19	.030	.76	.055	1.40	1.05	26.67	1.16	29.46	14.0	355.60
	27278	28278	20	.030	.76	.055	1.40	1.16	29.46	1.27	32.26	14.6	370.84
	27279	28279	25	.030	.76	.055	1.40	1.26	32.00	1.37	34.80	15.8	401.32
	27280	28280	30	.030	.76	.055	1.40	1.29	32.77	1.40	35.56	16.8	426.72
	27540	28540	37	.030	.76	.055	1.40	1.44	36.58	1.55	39.37	17.8	452.12
27432	28432	40	.030	.76	.055	1.40	1.50	38.10	1.63	41.40	18.4	467.36	

Color Code: Use ICEA Table E2 with printed numbers.

Non-stocked items. Check length available for specific construction. Minimum order may apply.

# UL Control Cable


600V Type MC Metal Clad Cables

Industrial Grade Sunlight- and Oil-Resistant Jackets

Description	Part Number		No. of Cond.	Insulation Thickness		Outer Jacket Thickness		Armor OD		Nominal OD		Minimum Bend Radius	
	Aluminum Armor	Steel Armor		Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm

**10 AWG** Stranded (7x18) Bare Copper Conductors • 10 AWG Bare Copper Ground Wire

**Aluminum or Steel Interlocked Armor • Cross-linked Polyethylene Insulation • PVC Jacket**

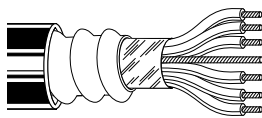	NEC: MC	27257	28257	2	.030	.76	.050	1.27	.56	14.22	.67	17.02	8.4	213.36
		27258	28258	3	.030	.76	.050	1.27	.58	14.73	.69	17.53	8.6	218.44
		27259	28259	4	.030	.76	.050	1.27	.62	15.75	.74	18.80	9.2	233.68
		27281	28281	5	.030	.76	.050	1.27	.68	17.27	.79	20.07	12.8	325.12
		27282	28282	6	.030	.76	.050	1.27	.74	18.80	.84	21.34	10.4	264.16
		27283	28283	7	.030	.76	.050	1.27	.74	18.80	.84	21.34	10.4	264.16
		27284	28284	8	.030	.76	.050	1.27	.81	20.57	.92	23.37	11.2	284.48
		27541	28541	9	.030	.76	.050	1.27	.87	22.10	.98	24.89	11.8	299.72
		27285	28285	10	.030	.76	.050	1.27	.89	22.61	1.03	26.16	13.3	337.82
		27286	28286	12	.030	.76	.050	1.27	1.01	25.65	1.12	28.45	13.7	347.98
		27287	28287	15	.030	.76	.050	1.27	1.09	27.69	1.22	30.99	14.8	375.92
		27288	28288	20	.030	.76	.055	1.40	1.22	30.99	1.35	34.29	16.2	411.48
		27289	28289	25	.030	.76	.055	1.40	1.32	33.53	1.47	37.34	17.8	452.12
		27290	28290	30	.030	.76	.055	1.40	1.42	36.07	1.55	39.37	18.6	472.44


**8 AWG** Stranded (7x16) Bare Copper Conductors • 10 AWG Bare Copper Ground Wire

**Aluminum or Steel Interlocked Armor • Cross-linked Polyethylene Insulation • PVC Jacket**

	NEC: MC	27291	28291	2	.045	1.14	.050	1.27	.70	17.78	.81	20.57	9.8	248.92
		27260	28260	3	.045	1.14	.050	1.27	.72	18.29	.82	20.83	10.2	259.08
		27261	28261	4	.045	1.14	.050	1.27	.78	19.81	.88	22.35	10.9	276.86

**6 AWG** Stranded (7x14) Bare Copper Conductors • 8 AWG Bare Copper Ground Wire

**Aluminum or Steel Interlocked Armor • Cross-linked Polyethylene Insulation • PVC Jacket**

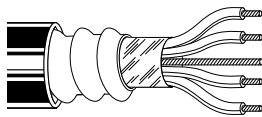	NEC: MC	27293	28293	2	.045	1.14	.050	1.27	.76	19.30	.87	22.10	10.7	271.78
		27262	28262	3	.045	1.14	.050	1.27	.80	20.32	.90	22.86	11.2	284.48
		27263	28263	4	.045	1.14	.050	1.27	.87	22.10	.97	24.64	12.1	307.34

Color Code: For sizes 14, 12, 10, use ICEA Table E2 with printed numbers.  
For sizes 8 and larger, use ICEA Method 4 with printed numbers.

Non-stocked items. Check length available for specific construction. Minimum order may apply.

# UL Control Cable

600V Type MC Metal Clad Cables


Industrial Grade Sunlight- and Oil-Resistant Jackets

Description	Part Number		No. of Cond.	Insulation Thickness		Outer Jacket Thickness		Armor OD		Nominal OD		Minimum Bend Radius	
	Aluminum Armor	Steel Armor		Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm

**4 AWG** Stranded (7x12) Bare Copper Conductors • 8 AWG Bare Copper Ground Wire

**Aluminum or Steel Interlocked Armor • Cross-linked Polyethylene Insulation • PVC Jacket**


NEC: MC	27264	28264	3	.045	1.14	.050	1.27	.90	22.86	1.00	25.40	13.1	332.74
	27265	28265	4	.045	1.14	.050	1.27	1.97	50.04	1.08	27.43	14.2	360.68



**2 AWG** Stranded (7x10) Bare Copper Conductors • 6 AWG Bare Copper Ground Wire

**Aluminum or Steel Interlocked Armor • Cross-linked Polyethylene Insulation • PVC Jacket**


NEC: MC	27267	28267	3	.045	1.14	.050	1.27	1.02	25.91	1.13	28.70	14.7	373.38
	27268	28268	4	.045	1.14	.050	1.27	1.11	28.19	1.22	30.99	16.0	406.40



**Composite 14 AWG (7x22) and 12 AWG (7x20) Stranded Bare Copper Conductors • 12 AWG Bare Copper Ground Wire**

**Aluminum or Steel Interlocked Armor • Cross-linked Polyethylene Insulation • PVC Jacket**


NEC: MC	27428	28428	3c/14	.030	.76	.050	1.27	.70	17.78	.81	20.57	9.7	246.38
			3c/12	.030	.76								



**Composite 14 AWG (7x22) and 10 AWG (7x18) Stranded Bare Copper Conductors • 10 AWG Bare Copper Ground Wire**

**Aluminum or Steel Interlocked Armor • Cross-linked Polyethylene Insulation • PVC Jacket**


NEC: MC	27429	28429	3c/14	.030	.76	.050	1.27	.74	18.80	.85	21.59	10.2	259.08
			3c/10	.030	.76								



**Composite 14 AWG (7x22) and 8 AWG (7x16) Stranded Bare Copper Conductors • 10 AWG Bare Copper Ground Wire**

**Aluminum or Steel Interlocked Armor • Cross-linked Polyethylene Insulation • PVC Jacket**


NEC: MC	27430	28430	3c/14	.030	.76	.050	1.27	.83	21.08	.94	23.88	11.2	284.48
			3c/8	.045	1.14								



**Composite 14 AWG (7x22) and 6 AWG (7x14) Stranded Bare Copper Conductors • 8 AWG Bare Copper Ground Wire**

**Aluminum or Steel Interlocked Armor • Cross-linked Polyethylene Insulation • PVC Jacket**

NEC: MC	27431	28431	3c/14	.030	.76	.050	1.27	.89	22.61	1.01	25.65	12.0	304.80
			3c/6	.045	1.14								



Color Code: For sizes 14, 12, 10, use ICEA Table E2 with printed numbers.  
For sizes 8 and larger, use ICEA Method 4 with printed numbers.

Non-stocked items. Check length available for specific construction. Minimum order may apply.



# UL Control Cable


600V Teck-Style® Cables

Dual-Rated Type MC/Teck 90

Description	Part Number		No. of Cond.	Insulation Thickness		Inner Jacket OD		Armor OD		Nominal OD		Maximum Pull Tension		Minimum Bend Radius	
	Aluminum Armor	Steel Armor		Inch	mm	Inch	mm	Inch	mm	Inch	mm	Lbs.	N	Inch	mm


**14 AWG** Stranded (7x22) Bare Copper Conductors • 14 AWG Bare Copper Ground Wire

**Aluminum or Steel Armor • Cross-linked Polyethylene Insulation • PVC Inner Jacket • PVC Outer Jacket**

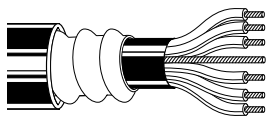NEC: MC	<b>27840</b>	<b>28840</b>	2	.030	.76	.37	9.40	.56	14.22	.67	17.02	66	294	8.0	203
	<b>27841</b>	<b>28841</b>	3	.030	.76	.39	9.91	.58	14.73	.69	17.53	98	436	8.3	211
	<b>27842</b>	<b>28842</b>	4	.030	.76	.43	10.92	.62	15.75	.73	18.54	131	583	8.7	221
	<b>27843</b>	<b>28843</b>	5	.030	.76	.47	11.94	.66	16.76	.77	19.56	164	730	9.2	234
	<b>27844</b>	<b>28844</b>	6	.030	.76	.51	12.95	.70	17.78	.81	20.57	191	850	9.7	246
	<b>27845</b>	<b>28845</b>	7	.030	.76	.51	12.95	.70	17.78	.81	20.57	225	1001	9.7	246
	<b>27846</b>	<b>28846</b>	8	.030	.76	.58	14.73	.77	19.56	.88	22.35	260	1157	10.5	267
	<b>27847</b>	<b>28847</b>	10	.030	.76	.67	17.02	.93	23.62	1.04	26.42	321	1428	12.5	318
	<b>27848</b>	<b>28848</b>	12	.030	.76	.69	17.53	.95	24.13	1.06	26.92	388	1726	10.9	277
	<b>27849</b>	<b>28849</b>	15	.030	.76	.77	19.56	1.03	26.16	1.14	28.96	481	2140	13.7	348
	<b>27850</b>	<b>28850</b>	20	.030	.76	.86	21.84	1.12	28.45	1.23	31.24	649	2887	15.3	389
	<b>27851</b>	<b>28851</b>	25	.030	.76	.92	23.37	1.18	29.97	1.30	33.02	810	3603	16.3	414
	<b>27852</b>	<b>28852</b>	30	.030	.76	.98	24.89	1.24	31.50	1.36	34.54	975	4337	17.0	432
CSA C22.2 #131 FT4 Flame Test, HAZ LOC CSA C22.2 #0.3 Clause 4.31 Low Acid Gas	<b>27885</b>	<b>28885</b>	40	.030	.76	1.09	27.69	1.35	34.29	1.47	37.34	1301	5787	18.5	470
	<b>27886</b>	<b>28886</b>	50	.030	.76	1.19	30.23	1.45	36.83	1.57	39.88	1630	7251	19.8	503

**12 AWG** Stranded (7x20) Bare Copper Conductors • 12 AWG Bare Copper Ground Wire

**Aluminum or Steel Armor • Cross-linked Polyethylene Insulation • PVC Inner Jacket • PVC Outer Jacket**

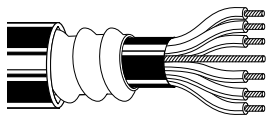NEC: MC	<b>27853</b>	<b>28853</b>	2	.030	.76	.41	10.41	.60	15.24	.71	18.03	104	463	8.5	216
	<b>27854</b>	<b>28854</b>	3	.030	.76	.43	10.92	.62	15.75	.73	18.54	156	694	8.8	224
	<b>27855</b>	<b>28855</b>	4	.030	.76	.47	11.94	.66	16.76	.77	19.56	207	921	9.2	234
	<b>27856</b>	<b>28856</b>	5	.030	.76	.52	13.21	.71	18.03	.82	20.83	260	1157	9.8	249
	<b>27857</b>	<b>28857</b>	6	.030	.76	.59	14.99	.78	19.81	.89	22.61	310	1379	10.7	272
	<b>27858</b>	<b>28858</b>	7	.030	.76	.59	14.99	.78	19.81	.89	22.61	361	1606	10.7	272
	<b>27859</b>	<b>28859</b>	8	.030	.76	.64	16.26	.83	21.08	.94	23.88	415	1846	11.3	287
	<b>27860</b>	<b>28860</b>	10	.030	.76	.75	19.05	1.01	25.65	1.12	28.45	520	2313	13.4	340
	<b>27861</b>	<b>28861</b>	12	.030	.76	.77	19.56	1.03	26.16	1.14	28.96	619	2753	13.7	348
	<b>27862</b>	<b>28862</b>	15	.030	.76	.87	22.10	1.13	28.70	1.25	31.75	718	3194	15.0	381
	<b>27863</b>	<b>28863</b>	20	.030	.76	.96	24.38	1.22	30.99	1.33	33.78	1040	4626	15.9	404
	<b>27864</b>	<b>28864</b>	25	.030	.76	1.04	26.42	1.30	33.02	1.42	36.07	1301	5787	17.0	432
CSA C22.2 #131 FT4 Flame Test, HAZ LOC CSA C22.2 #0.3 Clause 4.31 Low Acid Gas	<b>27865</b>	<b>28865</b>	30	.030	.76	1.15	29.21	1.41	35.81	1.53	38.86	1560	6939	18.3	465
	<b>27887</b>	<b>28887</b>	40	.030	.76	1.20	30.48	1.54	39.12	1.67	42.42	2020	8985	20.0	508

Color Code: Use ICEA Table E2 with printed numbers.

Non-stocked items. Check length available for specific construction. Minimum order may apply.

# UL Control Cable


## 600V Teck-Style® Cables

### Dual-Rated Type MC/Teck 90

Description	Part Number		No. of Cond.	Insulation Thickness		Inner Jacket OD		Armor OD		Nominal OD		Maximum Pull Tension		Minimum Bend Radius	
	Aluminum Armor	Steel Armor		Inch	mm	Inch	mm	Inch	mm	Inch	mm	Lbs.	N	Inch	mm

**10 AWG** Stranded (7x18) Bare Copper Conductors • 10 AWG Bare Copper Ground Wire


**Aluminum or Steel Armor • Cross-linked Polyethylene Insulation • PVC Inner Jacket • PVC Outer Jacket**

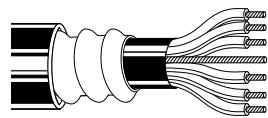	NEC: MC	<b>27866</b>	<b>28866</b>	2	.030	.76	.46	11.68	.65	16.51	.74	18.80	166	738	9.1	231
		<b>27867</b>	<b>28867</b>	3	.030	.76	.48	12.19	.67	17.02	.77	19.56	249	1108	9.4	239
		<b>27868</b>	<b>28868</b>	4	.030	.76	.56	14.22	.75	19.05	.84	21.34	330	1468	10.3	262
		<b>27869</b>	<b>28869</b>	5	.030	.76	.67	17.02	.86	21.84	.96	24.38	415	1846	11.6	295
		<b>27870</b>	<b>28870</b>	6	.030	.76	.67	17.02	.86	21.84	.96	24.38	491	2184	11.6	295
		<b>27877</b>	<b>28877</b>	7	.030	.76	.70	17.78	.90	22.86	1.00	25.40	560	2491	12.1	307
		<b>27878</b>	<b>28878</b>	8	.030	.76	.75	19.05	.95	24.13	1.05	26.67	640	2847	12.7	323
		<b>27879</b>	<b>28879</b>	10	.030	.76	.78	19.81	1.04	26.42	1.15	29.21	801	3563	13.8	351
		<b>27880</b>	<b>28880</b>	12	.030	.76	.89	22.61	1.15	29.21	1.26	32.00	960	4270	15.1	384
		<b>27881</b>	<b>28881</b>	15	.030	.76	.93	23.62	1.19	30.23	1.30	33.02	1195	5316	15.6	396
		<b>27882</b>	<b>28882</b>	20	.030	.76	1.06	26.92	1.32	33.53	1.44	36.58	1600	7117	17.3	439
		<b>27883</b>	<b>28883</b>	25	.030	.76	1.12	28.45	1.44	36.58	1.58	40.13	1990	8852	19.0	483
		<b>27884</b>	<b>28884</b>	30	.030	.76	1.28	32.51	1.54	39.12	1.67	42.42	2355	10476	20.0	508

CSA C22.2 #131  
FT4 Flame Test, HAZ LOC  
CSA C22.2 #0.3 Clause 4.31 Low Acid Gas

**8 AWG** Stranded (7x16) Bare Copper Conductors • 10 AWG Bare Copper Ground Wire


**Aluminum or Steel Armor • Cross-linked Polyethylene Insulation • PVC Inner Jacket • PVC Outer Jacket**

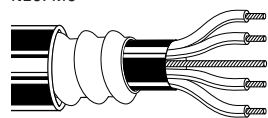	NEC: MC	<b>27871</b>	<b>28871</b>	2	.045	1.14	.59	14.99	.78	19.81	.89	22.61	264	1174	10.7	272
		<b>27872</b>	<b>28872</b>	3	.045	1.14	.62	15.75	.81	20.57	.91	23.11	396	1762	10.9	277
		<b>27873</b>	<b>28873</b>	4	.045	1.14	.68	17.27	.94	23.88	1.05	26.67	528	2349	12.6	320

CSA C22.2 #131, FT4 Flame Test, HAZ LOC, CSA C22.2 #0.3 Clause 4.31 Low Acid Gas

**6 AWG** Stranded (7x14) Bare Copper Conductors • 8 AWG Bare Copper Ground Wire


**Aluminum or Steel Armor • Cross-linked Polyethylene Insulation • PVC Inner Jacket • PVC Outer Jacket**

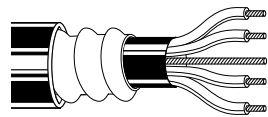	NEC: MC	<b>27874</b>	<b>28874</b>	2	.060	1.52	.71	18.03	.97	24.64	1.08	27.43	420	1868	13.0	330
		<b>27875</b>	<b>28875</b>	3	.060	1.52	.76	19.30	1.02	25.91	1.13	28.70	630	2802	13.5	343
		<b>27876</b>	<b>28876</b>	4	.060	1.52	.88	22.35	1.14	28.96	1.25	31.75	840	3737	15.0	381

CSA C22.2 #131, FT4 Flame Test, HAZ LOC, CSA C22.2 #0.3 Clause 4.31 Low Acid Gas

**4 AWG** Stranded (7x12) Bare Copper Conductors • 8 AWG Bare Copper Ground Wire

**Aluminum or Steel Armor • Cross-linked Polyethylene Insulation • PVC Inner Jacket • PVC Outer Jacket**

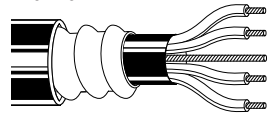	NEC: MC	<b>27894</b>	<b>28894</b>	3	.060	1.52	.91	23.11	1.17	29.72	1.29	32.77	1002	4457	15.5	394
		<b>27895</b>	<b>28895</b>	4	.060	1.52	.99	25.15	1.25	31.75	1.37	34.80	1335	5938	16.4	417

CSA C22.2 #131, FT4 Flame Test, HAZ LOC, CSA C22.2 #0.3 Clause 4.31 Low Acid Gas

**3 AWG** Stranded (7x11) Bare Copper Conductors • 6 AWG Bare Copper Ground Wire

**Aluminum or Steel Armor • Cross-linked Polyethylene Insulation • PVC Inner Jacket • PVC Outer Jacket**

	NEC: MC	<b>27896</b>	<b>28896</b>	3	.060	1.52	.96	24.38	1.22	30.99	1.33	33.78	1263	5618	16.0	406
---	---------	--------------	--------------	---	------	------	-----	-------	------	-------	------	-------	------	------	------	-----

CSA C22.2 #131, FT4 Flame Test, HAZ LOC, CSA C22.2 #0.3 Clause 4.31 Low Acid Gas

Color Code: For sizes 14, 12, 10, use ICEA Table E2 with printed numbers.  
For sizes 8 and larger, use ICEA Method 4 with printed numbers.

Non-stocked items. Check length available for specific construction. Minimum order may apply.

# UL Control Cable

600V Teck-Style® Cables


Dual-Rated Type MC/Teck 90

Description	Part Number		No. of Cond.	Insulation Thickness		Inner Jacket OD		Armor OD		Nominal OD		Maximum Pull Tension		Minimum Bend Radius	
	Aluminum Armor	Steel Armor		Inch	mm	Inch	mm	Inch	mm	Inch	mm	Lbs.	N	Inch	mm

**2 AWG Stranded (7x10) Bare Copper Conductors • 6 AWG Bare Copper Ground Wire**

**Aluminum or Steel Armor • Cross-linked Polyethylene Insulation • PVC Inner Jacket • PVC Outer Jacket**

NEC: MC	<b>27888</b>	<b>28888</b>	3	.060	1.52	1.08	27.43	1.28	32.51	1.40	35.56	1593	7086	16.8	427
	<b>27889</b>	<b>28889</b>	4	.060	1.52	1.12	28.45	1.38	35.05	1.50	38.10	2124	9448	18.0	457




CSA C22.2 #131, FT4 Flame Test, HAZ LOC, CSA C22.2 #0.3 Clause 4.31 Low Acid Gas

**Composite 14 AWG (7x22) and 12 AWG (7x20) Bare Copper Conductors • 12 AWG Bare Copper Ground Wire**

**Aluminum or Steel Armor • Cross-linked Polyethylene Insulation • PVC Inner Jacket • PVC Outer Jacket**

NEC: MC	<b>27890</b>	<b>28890</b>	3c/14	.030	.76	.56	14.22	.75	19.05	.86	21.84	202	899	10.3	262
			3c/12	.030	.76										




CSA C22.2 #131, FT4 Flame Test, HAZ LOC, CSA C22.2 #0.3 Clause 4.31 Low Acid Gas

**Composite 14 AWG (7x22) and 10 AWG (7x18) Bare Copper Conductors • 10 AWG Bare Copper Ground Wire**

**Aluminum or Steel Armor • Cross-linked Polyethylene Insulation • PVC Inner Jacket • PVC Outer Jacket**

NEC: MC	<b>27891</b>	<b>28891</b>	3c/14	.030	.76	.61	15.49	.80	20.32	.91	23.11	305	1357	10.9	277
			3c/10	.030	.76										




CSA C22.2 #131, FT4 Flame Test, HAZ LOC, CSA C22.2 #0.3 Clause 4.31 Low Acid Gas

**Composite 14 AWG (7x22) and 8 AWG (7x16) Bare Copper Conductors • 10 AWG Bare Copper Ground Wire**

**Aluminum or Steel Armor • Cross-linked Polyethylene Insulation • PVC Inner Jacket • PVC Outer Jacket**

NEC: MC	<b>27892</b>	<b>28892</b>	3c/14	.045	1.14	.70	17.78	.96	24.38	1.07	27.18	435	1935	12.8	325
			3c/8	.030	.76										




CSA C22.2 #131, FT4 Flame Test, HAZ LOC, CSA C22.2 #0.3 Clause 4.31 Low Acid Gas

**Composite 14 AWG (7x22) and 6 AWG (7x14) Bare Copper Conductors • 8 AWG Bare Copper Ground Wire**

**Aluminum or Steel Armor • Cross-linked Polyethylene Insulation • PVC Inner Jacket • PVC Outer Jacket**

NEC: MC	<b>27893</b>	<b>28893</b>	3c/14	.060	1.52	.90	22.86	1.15	29.21	1.26	32.00	655	2914	15.1	384
			3c/6	.030	.76										



CSA C22.2 #131, FT4 Flame Test, HAZ LOC, CSA C22.2 #0.3 Clause 4.31 Low Acid Gas

Color Code: For sizes 14, 12, 10, use ICEA Table E2 with printed numbers.

For sizes 8 and larger, use ICEA Method 4 with printed numbers.

Non-stocked items. Check length available for specific construction. Minimum order may apply.

# CSA Instrumentation & Thermocouple Tray Cable

300V TC/CIC

Paired and Triad Constructions

## Cable Specifications

- CSA C22.2 #239 Control and Instrumentation
- CSA C22.2 #230 Type TC
- CSA FT4 70,000 BTU Flame Test
- PVC Insulation 90°C Dry & 75°C Wet
- XLPE Insulation Optional 90°C Dry and Wet
- -40°C Cold Bend, -25°C Cold Impact
- -25°C Installation temp
- Per CEC Part 1, Suitable for use in hazardous locations:  
Class 1 – Zone 2  
Class 2 – Division 2
- Sun Res/UV resistant
- Direct Burial

## To Create a Part Number

Add suffixes for Conductor, Insulation and Jacket Type and Shielding as shown below:

**A** = Bare Copper Conductor or Thermocouple alloy, PVC insulation, PVC Jacket

**B** = Tinned Copper Conductor, PVC Insulation, PVC Jacket

**C** = Bare Copper Conductor or Thermocouple alloy, XLPE Insulation, PVC Jacket

**D** = Tinned Copper Conductor, XLPE Insulation, PVC Jacket

**1** = Overall Foil Shield + Drain Wire

**2** = Individual and Overall Foil Shield + Drain Wire

## Sample Part Number:

**22001B2** = 300V, 2-Pair 20 AWG Tinned Copper Conductor cable with PVC Insulation, PVC Jacket, with Individual and Overall Foil Shields plus Drain Wire

## Thermocouple Color Codes

ANSI Symbol	Jacket Color	Insulation Color Code	
		Positive (+)	Negative (-)
EX	Purple	Purple	Red
JX	Black	White	Red
KX	Yellow	Yellow	Red
TX	Blue	Blue	Red

## Copper Color Codes

Pairs/Triads	Color Combination
Pairs	Black & White
Triads	Black, White & Red

No. of Pairs	Part Numbers				
	7 Strand Copper	Solid EX Chromel/Constantan	Solid JX Iron/Constantan	Solid KX Chromel/Alumel	Solid TX Copper/Constantan
<b>20 AWG</b>					
1	22000	21100	21114	21128	21142
2	22001	21101	21115	21129	21143
4	22002	21102	21116	21130	21144
6	22003	21103	21117	21131	21145
8	22004	21104	21118	21132	21146
10	22005	21105	21119	21133	21147
12	22006	21106	21120	21134	21148
16	22007	21107	21121	21135	21149
20	22008	21108	21122	21136	21150
24	22009	21109	21123	21137	21151
30	22010	21110	21124	21138	21152
36	22011	21111	21125	21139	21153
40	22012	21112	21126	21140	21154
50	22013	21113	21127	21141	21155
<b>18 AWG</b>					
1	22027	21156	21170	21184	21198
2	22028	21157	21171	21185	21199
4	22029	21158	21172	21186	21200
6	22030	21159	21173	21187	21201
8	22031	21160	21174	21188	21202
10	22032	21161	21175	21189	21203
12	22033	21162	21176	21190	21204
16	22034	21163	21177	21191	21205
20	22035	21164	21178	21192	21206
24	22036	21165	21179	21193	21207
30	22037	21166	21180	21194	21208
36	22038	21167	21181	21195	21209
40	22039	21168	21182	21196	21210
50	22040	21169	21183	21197	21211
<b>16 AWG</b>					
1	22054	21212	21226	21240	21254
2	22055	21213	21227	21241	21255
4	22056	21214	21228	21242	21256
6	22057	21215	21229	21243	21257
8	22058	21216	21230	21244	21258
10	22059	21217	21231	21245	21259
12	22060	21218	21232	21246	21260
16	22061	21219	21233	21247	21261
20	22062	21220	21234	21248	21262
24	22063	21221	21235	21249	21263
30	22064	21222	21236	21250	21264
36	22065	21223	21237	21251	21265
40	22066	21224	21238	21252	21266
50	22067	21225	21239	21253	21267

## Triad Constructions, Copper Conductor

No. of Triads	Part Numbers		
	20 AWG (7 Strand)	18 AWG (7 Strand)	16 AWG (7 Strand)
1	22014	22041	22068
2	22015	22042	22069
4	22016	22043	22070
6	22017	22044	22071
8	22018	22045	22072
10	22019	22046	22073
12	22020	22047	22074
16	22021	22048	22075
20	22022	22049	22076
24	22023	22050	22077
30	22024	22051	22078
36	22025	22052	22079



# CSA Instrumentation Cable

## 300V CIC


Belden offers a complete line of high performance and high quality CSA certified instrumentation cables (300V/600V and CIC/ACIC). These cables are designed to minimize noise and signal interference to deliver clean signals in harsh petrochemical, pulp and paper and process industry environments, as well as for use in general manufacturing operations.

Contact Belden Customer Service for other options:

- 150V
- XLPE insulation (add D suffix to part number)
- Thermocouple alloy conductors
- Overall foil shield only
- Other pair and triad counts


Description	Part Number	No. of Pairs or Triads	Cable Weight		Jacket Thickness		Nominal OD	
			Lbs./1000 Ft.	kg/km	Inch	mm	Inch	mm

**20 AWG Pairs Stranded (7x28) TC Conductors • Individual Beldfoil® + Polyester Isolation Tape • Overall Beldfoil Shield (100% Coverage)**
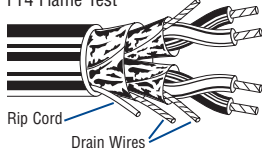
<b>PVC Insulation • Black PVC Jacket (Color Code: Black and White with Numbers)</b>								
CSA C22.2#239, Type CIC	<b>22671*</b>	1	71	106	.045	1.14	.260	6.60
CSA C22.2 #0.3 Clause 4.31 Low Acid Gas FT4 Flame Test	<b>22638</b>	2	143	213	.045	1.14	.400	10.16
	<b>22639</b>	4	217	323	.045	1.14	.460	11.68
	<b>22640</b>	6	320	476	.045	1.14	.570	14.48
	<b>22641</b>	8	405	603	.060	1.52	.610	15.49
	<b>22676</b>	12	573	853	.060	1.52	.730	18.54
	<b>22643</b>	16	722	1076	.060	1.52	.810	20.57
	<b>22647</b>	24	1103	1641	.080	2.03	1.040	26.42
	<b>22670</b>	36	1548	2304	.080	2.03	1.190	30.23


-25°C Installed  
-40°C to +105°C (Dry) (75°C Wet)

**20 AWG Triads Stranded (7x28) TC Conductors • Individual Beldfoil + Polyester Isolation Tape • Overall Beldfoil Shield (100% Coverage)**
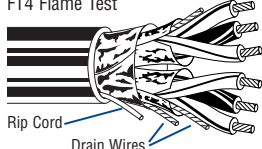
<b>PVC Insulation • Black PVC Jacket (Color Code: Black, White and Red with Numbers)</b>								
CSA C22.2#239, Type CIC	<b>22660*</b>	1	89	132	.045	1.14	.270	6.86
CSA C22.2 #0.3 Clause 4.31 Low Acid Gas FT4 Flame Test	<b>22662</b>	2	177	263	.045	1.14	.420	10.67
	<b>22663</b>	4	277	412	.045	1.14	.490	12.45
	<b>22672</b>	8	521	775	.060	1.52	.650	16.51
	<b>22673</b>	16	1000	1488	.080	2.03	.910	23.11
	<b>22674</b>	24	1414	2104	.080	2.03	1.110	28.19


-25°C Installed • -40°C to +105°C (Dry) (75°C Wet)

**18 AWG Pairs Stranded (7x26) TC Conductors • Individual Beldfoil + Polyester Isolation Tape • Overall Beldfoil Shield (100% Coverage)**
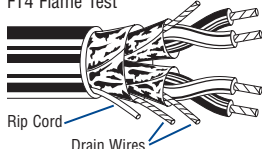
<b>PVC Insulation • Black PVC Jacket (Color Code: Black and White with Numbers)</b>								
CSA C22.2#239, Type CIC	<b>22645*</b>	1	97	144	.045	1.14	.300	7.62
CSA C22.2 #0.3 Clause 4.31 Low Acid Gas FT4 Flame Test	<b>22633</b>	2	196	292	.045	1.14	.480	12.19
	<b>22648</b>	4	338	503	.045	1.14	.580	14.73
	<b>22634</b>	6	473	704	.060	1.52	.670	17.02
	<b>22635</b>	8	570	848	.060	1.52	.730	18.54
	<b>22636</b>	12	869	1293	.060	1.52	.920	23.37
	<b>22654</b>	16	1095	1630	.080	2.03	1.020	25.91
	<b>22637</b>	24	1552	2310	.080	2.03	1.260	32.00

-25°C Installed • -40°C to +105°C (Dry) (75°C Wet)

**18 AWG Triads Stranded (7x26) TC Conductors • Individual Beldfoil + Polyester Isolation Tape • Overall Beldfoil Shield (100% Coverage)**
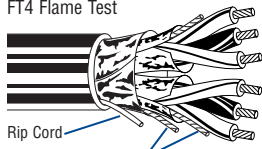
<b>PVC Insulation • Black PVC Jacket (Color Code: Black, White and Red with Numbers)</b>								
CSA C22.2#239, Type CIC	<b>22677*</b>	1	121	180	.045	1.14	.303	7.70
CSA C22.2 #0.3 Clause 4.31 Low Acid Gas FT4 Flame Test	<b>22678</b>	2	256	381	.045	1.14	.480	12.19
	<b>22679</b>	4	427	636	.060	1.52	.620	15.75
	<b>22680</b>	8	597	888	.060	1.52	.710	18.03
	<b>22681</b>	16	740	1101	.060	1.52	.770	19.56
	<b>22682</b>	24	1130	1682	.080	2.03	.980	24.89
	<b>22683</b>	16	1436	2137	.080	2.03	1.090	27.69
	<b>22684</b>	24	2049	3049	.080	2.03	1.340	34.04

-25°C Installed • -40°C to +105°C (Dry) (75°C Wet)

\*One pair/triad cables have one shield and drain wire

TC = Tinned Copper



# CSA Instrumentation Cable


## 300V CIC

Description	Part Number	No. of Pairs or Triads	Cable Weight		Jacket Thickness		Nominal OD	
			Lbs./1000 Ft.	kg/km	Inch	mm	Inch	mm

**16 AWG Pairs** Stranded (7x24) TC Conductors • Individual Beldfoil® + Polyester Isolation Tape • Overall Beldfoil Shield (100% Coverage)

**PVC Insulation • Black PVC Jacket** (Color Code: Black and White with Numbers)

CSA C22.2#239, Type CIC	<b>22646*</b>	1	122	182	.045	1.14	.320	8.13
CSA C22.2 #0.3 Clause 4.31 Low Acid Gas FT4 Flame Test	<b>22628</b>	2	262	390	.045	1.14	.520	13.21
	<b>22629</b>	4	438	652	.060	1.52	.628	15.95
	<b>22630</b>	6	603	897	.060	1.52	.740	18.80
	<b>22631</b>	8	752	1119	.060	1.52	.800	20.32
	<b>22632</b>	12	1148	1708	.080	2.03	1.010	25.65
	<b>22685</b>	16	1461	2174	.080	2.03	1.120	28.45
	<b>22686</b>	24	2091	3112	.080	2.03	1.380	35.05




-25°C Installed  
-40°C to +105°C (Dry) (75°C Wet)

**16 AWG Triads** Stranded (7x24) TC Conductors • Individual Beldfoil + Polyester Isolation Tape • Overall Beldfoil Shield (100% Coverage)

**PVC Insulation • Black PVC Jacket** (Color Code: Black, White and Red with Numbers)

CSA C22.2#239, Type CIC	<b>22603*</b>	1	152	226	.045	1.14	.329	8.36
CSA C22.2 #0.3 Clause 4.31 Low Acid Gas FT4 Flame Test	<b>22687</b>	2	344	512	.045	1.14	.580	14.73
	<b>22675</b>	4	564	839	.060	1.52	.670	17.02
	<b>22688</b>	6	819	1219	.060	1.52	.780	19.81
	<b>22689</b>	8	1063	1582	.080	2.03	.940	23.88
	<b>22690</b>	12	1524	2268	.080	2.03	1.080	27.43



-25°C Installed  
-40°C to +105°C (Dry) (75°C Wet)

TC = Tinned Copper

\*One pair/triad cables have one shield and drain wire



# CSA Instrumentation Cable


## 300V ACIC Armored Cables

Description	Part No.		No. of Pairs/Triads	Cable Weight Aluminum Armor		Cable Weight Steel Armor		Insulation Thickness		Nominal OD Inner Jacket		Nominal OD Outer Jacket	
	Aluminum Armor	Steel Armor		Lbs./1000 Ft.	kg/km	Lbs./1000 Ft.	kg/km	Inch	mm	Inch	mm	Inch	mm

**20 AWG Pairs** Stranded (7x28) TC Cond. • Individual Beldfoil® + Polyester Isolation Tape • Overall Beldfoil Shield (100% Coverage) • Drain Wires

**Interlocked Armor • PVC Insulation\* • PVC Inner Jacket • Chrome PVC Outer Jacket**

CSA C22.2#239, Type ACIC	<b>23543**</b>	<b>26530**</b>	1	140	208	230	342	.020	.51	.26	6.6	.56	14.2
CSA C22.2#174, HLBCD	<b>23534</b>	<b>26531</b>	2	206	307	325	484	.020	.51	.40	10.2	.70	17.8
CSA C22.2#0.3, Clause 4.31	<b>23514</b>	<b>26532</b>	4	255	379	390	580	.020	.51	.46	11.7	.76	19.3
Low Acid Gas	<b>23513</b>	<b>26533</b>	6	297	442	494	735	.020	.51	.57	14.5	.88	22.4
FT4 Flame Test	<b>23503</b>	<b>26534</b>	8	361	537	563	840	.020	.51	.63	16.0	.92	23.4
	<b>23521</b>	<b>26535</b>	12	480	714	694	1033	.020	.51	.75	19.1	1.06	26.9
	<b>23532</b>	<b>26536</b>	16	600	893	900	1339	.020	.51	.79	20.1	1.16	29.5
	<b>23506</b>	<b>26537</b>	24	800	1191	1175	1749	.020	.51	1.05	26.7	1.42	36.1
	<b>23544</b>	<b>26538</b>	36	1050	1563	1500	2232	.020	.51	1.14	29.0	1.57	39.9
	<b>23575</b>	<b>26546</b>	50	1468	2185	2010	2991	.020	.51	1.37	34.8	1.75	44.5




-25°C Installed  
-40°C to +105°C (Dry) (75°C Wet)

**20 AWG Triads** Stranded (7x28) TC Cond. • Individual Beldfoil + Polyester Isolation Tape • Overall Beldfoil Shield (100% Coverage) • Drain Wires

**Interlocked Armor • PVC Insulation\* • PVC Inner Jacket • Chrome PVC Outer Jacket**

CSA C22.2#239, Type ACIC	<b>23545**</b>	<b>26539**</b>	1	139	207	235	350	.020	.51	.27	6.9	.57	14.5
CSA C22.2#174, HLBCD	<b>23546</b>	<b>26540</b>	2	210	313	345	513	.020	.51	.43	10.9	.73	18.5
CSA C22.2#0.3, Clause 4.31	<b>23547</b>	<b>26541</b>	4	270	402	425	632	.020	.51	.50	12.7	.80	20.3
Low Acid Gas, FT4 Flame Test	<b>23548</b>	<b>26542</b>	8	444	661	650	967	.020	.51	.69	17.5	1.00	25.4
	<b>23571</b>	<b>26553</b>	12	632	941	970	1444	.020	.51	.82	20.8	1.24	31.5
	<b>23549</b>	<b>26543</b>	16	740	1101	1090	1622	.020	.51	.91	23.1	1.28	32.5
	<b>23550</b>	<b>26544</b>	24	990	1473	1360	2024	.020	.51	1.11	28.2	1.48	37.6




-25°C Installed • -40°C to +105°C (Dry) (75°C Wet)

**18 AWG Pairs** Stranded (7x26) TC Cond. • Individual Beldfoil + Polyester Isolation Tape • Overall Beldfoil Shield (100% Coverage) • Drain Wires

**Interlocked Armor • PVC Insulation\* • PVC Inner Jacket • Chrome PVC Outer Jacket**

CSA C22.2#239, Type ACIC	<b>23533**</b>	<b>26514**</b>	1	160	238	258	384	.025	.64	.30	7.6	.60	15.2
CSA C22.2#174, HLBCD	<b>23511</b>	<b>26515</b>	2	247	368	384	572	.025	.64	.48	12.2	.78	19.8
CSA C22.2#0.3, Clause 4.31	<b>23530</b>	<b>26516</b>	4	340	506	500	744	.025	.64	.58	14.7	.88	22.4
Low Acid Gas	<b>23528</b>	<b>26517</b>	6	420	625	644	958	.025	.64	.67	17.0	.98	24.9
FT4 Flame Test	<b>23531</b>	<b>26518</b>	8	543	808	827	1230	.025	.64	.73	18.5	1.03	26.2
	<b>23524</b>	<b>26519</b>	12	725	1079	1045	1555	.025	.64	.90	22.9	1.28	32.5
	<b>23519</b>	<b>26520</b>	16	850	1265	1210	1801	.025	.64	.99	25.1	1.37	34.8
	<b>23542</b>	<b>26521</b>	24	1100	1637	1510	2247	.025	.64	1.24	31.5	1.63	41.4
	<b>23554</b>	<b>26555</b>	36	1465	2180	1960	2917	.025	.64	1.41	35.8	1.80	45.7




-25°C Installed • -40°C to +105°C (Dry) (75°C Wet)

**18 AWG Triads** Stranded (7x26) TC Cond. • Individual Beldfoil + Polyester Isolation Tape • Overall Beldfoil Shield (100% Coverage) • Drain Wires

**Interlocked Armor • PVC Insulation\* • PVC Inner Jacket • Chrome PVC Outer Jacket**

CSA C22.2#239, Type ACIC	<b>23505**</b>	<b>26522**</b>	1	175	260	275	409	.025	.64	.33	8.4	.61	15.5
CSA C22.2#174, HLBCD	<b>23516</b>	<b>26523</b>	2	275	409	417	621	.025	.64	.51	13.0	.81	20.6
CSA C22.2#0.3, Clause 4.31	<b>23515</b>	<b>26524</b>	4	385	573	555	826	.025	.64	.62	15.7	.93	23.6
Low Acid Gas, FT4 Flame Test	<b>23508</b>	<b>26525</b>	6	535	796	780	1161	.025	.64	.75	19.1	1.11	28.2
	<b>23523</b>	<b>26526</b>	8	680	1012	995	1481	.025	.64	.81	20.6	1.18	30.0
	<b>23512</b>	<b>26527</b>	12	916	1363	1215	1808	.025	.64	1.03	26.2	1.40	35.6
	<b>23537</b>	<b>26528</b>	16	1020	1518	1400	2083	.025	.64	1.13	28.7	1.50	38.1
	<b>23536</b>	<b>26529</b>	24	1335	1987	1775	2642	.025	.64	1.37	34.8	1.80	45.7



-25°C Installed • -40°C to +105°C (Dry) (75°C Wet)

Color Code: Pairs — Black and White with Numbers.  
Triads — Black, White and Red with Numbers.

TC = Tinned Copper

\*Note: Add D suffix for XLPE insulation. Example: 23543D.  
\*\*One pair/triad cables have one foil shield and drain wire



For more information, contact **Belden Technical Support: 1-800-BELDEN-1 • www.belden.com**


# CSA Instrumentation Cable

## 300V ACIC Armored Cables

Description	Part No.		No. of Pairs/Triads	Cable Weight Aluminum Armor		Cable Weight Steel Armor		Insulation Thickness		Nominal OD Inner Jacket		Nominal OD Outer Jacket	
	Aluminum Armor	Steel Armor		Lbs. / 1000 Ft.	kg/km	Lbs. / 1000 Ft.	kg/km	Inch	mm	Inch	mm	Inch	mm

**16 AWG Pairs** Stranded (7x24) TC Conductors • Individual Beldfoil® + Polyester Isolation Tape • Overall Beldfoil Shield (100% Coverage)


**Interlocked Armor • PVC Insulation\* • PVC Inner Jacket • Chrome PVC Outer Jacket**

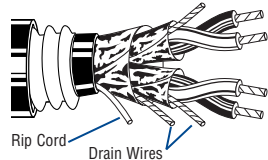CSA C22.2#239, Type ACIC	<b>23501**</b>	<b>26500**</b>	1	175	260	280	417	.025	.64	.33	8.4	.62	15.8
CSA C22.2#174, HLBCD	<b>23527</b>	<b>26501</b>	2	280	417	425	635	.025	.64	.52	13.2	.81	20.6
CSA C22.2#0.3, Clause 4.31 Low Acid Gas	<b>23509</b>	<b>26503</b>	4	395	588	570	848	.025	.64	.63	16.0	.93	23.6
FT4 Flame Test	<b>23500</b>	<b>26504</b>	6	510	759	715	1064	.025	.64	.73	18.5	1.03	26.2
	<b>23510</b>	<b>26505</b>	8	625	930	910	1354	.025	.64	.79	20.1	1.16	29.5
	<b>23525</b>	<b>26506</b>	12	875	1302	1230	1831	.025	.64	1.00	25.4	1.37	34.8
	<b>23539</b>	<b>26507</b>	16	1054	1569	1445	2151	.025	.64	1.12	28.2	1.48	37.6
	<b>23538</b>	<b>26508</b>	24	1397	2079	1840	2738	.025	.64	1.36	34.5	1.75	44.5
	<b>23568</b>	<b>26551</b>	36	1920	2857	2460	3661	.025	.64	1.60	40.6	1.97	50.0

-25°C Installed • -40°C to +105°C (Dry) (75°C Wet)

**16 AWG Triads** Stranded (7x24) TC Conductors • Individual Beldfoil + Polyester Isolation Tape • Overall Beldfoil Shield (100% Coverage)

**Interlocked Armor • PVC Insulation\* • PVC Inner Jacket • Chrome PVC Outer Jacket**

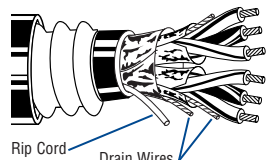CSA C22.2#239, Type ACIC	<b>23507**</b>	<b>26502**</b>	1	190	282	295	439	.025	.64	.35	8.9	.63	16.0
CSA C22.2#174, HLBCD	<b>23522</b>	<b>26509</b>	2	342	508	500	744	.025	.64	.58	14.7	.90	22.9
CSA C22.2#0.3, Clause 4.31 Low Acid Gas	<b>23520</b>	<b>26510</b>	4	450	670	640	953	.025	.64	.68	17.3	.95	24.1
FT4 Flame Test	<b>23529</b>	<b>26511</b>	6	650	967	928	1381	.025	.64	.78	19.8	1.19	30.2
	<b>23526</b>	<b>26512</b>	8	825	1228	1130	1682	.025	.64	.93	23.6	1.30	33.0
	<b>23541</b>	<b>26513</b>	12	1082	1610	1511	2249	.025	.64	1.13	28.7	1.50	38.1
	<b>23567</b>	<b>26545</b>	16	1285	1912	1705	2537	.025	.64	1.25	31.8	1.64	41.7
	<b>23578</b>	<b>26547</b>	24	1725	2567	2200	3274	.025	.64	1.58	40.1	1.95	49.5

-25°C Installed • -40°C to +105°C (Dry) (75°C Wet)

TC = Tinned Copper

\*Note: Add D suffix for XLPE insulation. Example: 23501D.

\*\*One pair/triad cables have one foil shield and drain wire

Color Code: Pairs — Black and White with Numbers.

Triads — Black, White and Red with Numbers.

# CSA Instrumentation Cable


## 600V CIC

Description	Part Number	No. of Pairs or Triads	Cable Weight		Jacket Thickness		Nominal OD	
			Lbs./1000 Ft.	kg/km	Inch	mm	Inch	mm

**18 AWG Pairs Stranded (7x26) TC Conductors • Individual Beldfoil® + Polyester Isolation Tape • Overall Beldfoil Shield (100% Coverage)**

**PVC Insulation • Black PVC Jacket (Color Code: Black and White with Numbers)**

CSA C22.2#239, Type CIC	<b>22417*</b>	1	109	162	.045	1.14	.32	8.13
CSA C22.2#0.3, Clause 4.31 Low Acid Gas FT4 Flame Test	<b>22405</b>	2	229	341	.045	1.14	.51	12.95
	<b>22404</b>	4	374	557	.060	1.52	.63	16.00
	<b>22418</b>	8	632	941	.060	1.52	.79	20.07
	<b>22421</b>	12	970	1444	.080	2.03	1.00	25.40
	<b>22419</b>	24	1741	2591	.080	2.03	1.36	34.54




-25°C Installed  
-40°C to +105°C (Dry) (75°C Wet)

**18 AWG Triads Stranded (7x26) TC Conductors • Individual Beldfoil + Polyester Isolation Tape • Overall Beldfoil Shield (100% Coverage)**

**PVC Insulation • Black PVC Jacket (Color Code: Black, White and Red with Numbers)**

CSA C22.2#239, Type CIC	<b>22442*</b>	1	131	195	.045	1.14	.34	8.64
CSA C22.2#0.3, Clause 4.31 Low Acid Gas FT4 Flame Test	<b>22443</b>	2	299	445	.060	1.52	.58	14.73
	<b>22444</b>	4	476	708	.060	1.52	.68	17.27
	<b>22445</b>	8	893	1329	.080	2.03	.88	22.35




-25°C Installed  
-40°C to +105°C (Dry) (75°C Wet)

**16 AWG Pairs Stranded (7x24) TC Conductors • Individual Beldfoil + Polyester Isolation Tape • Overall Beldfoil Shield (100% Coverage)**

**PVC Insulation • Black PVC Jacket (Color Code: Black and White with Numbers)**

CSA C22.2#239, Type CIC	<b>22416*</b>	1	129	192	.045	1.14	.34	8.64
CSA C22.2#0.3, Clause 4.31 Low Acid Gas FT4 Flame Test	<b>22409</b>	2	229	341	.045	1.14	.59	14.99
	<b>22410</b>	4	469	698	.060	1.52	.68	17.27
	<b>22446</b>	6	667	993	.060	1.52	.79	20.07
	<b>22411</b>	8	841	1252	.080	2.03	.90	22.86
	<b>22412</b>	12	1235	1838	.080	2.03	1.09	27.69
	<b>22447</b>	24	2250	3349	.080	2.03	1.49	37.85




-25°C Installed  
-40°C to +105°C (Dry) (75°C Wet)

**16 AWG Triads Stranded (7x24) TC Conductors • Individual Beldfoil + Polyester Isolation Tape • Overall Beldfoil Shield (100% Coverage)**

**PVC Insulation • Black PVC Jacket (Color Code: Black, White and Red with Numbers)**

CSA C22.2#239, Type CIC	<b>22413*</b>	1	167	249	.045	1.14	.36	9.14
CSA C22.2#0.3, Clause 4.31 Low Acid Gas FT4 Flame Test	<b>22448</b>	2	372	554	.045	1.14	.62	15.88
	<b>22414</b>	4	606	902	.060	1.52	.72	18.29
	<b>22415</b>	8	1144	1703	.080	2.03	.96	24.38



-25°C Installed  
-40°C to +105°C (Dry) (75°C Wet)

TC = Tinned Copper

\*One pair/triad cables have one foil shield and drain wire


# CSA Instrumentation Cable

## 600V ACIC Armored Cables

Description	Part No.		No. of Pairs/Triads	Cable Weight Aluminum Armor		Cable Weight Steel Armor		Insulation Thickness		Nominal OD Inner Jacket		Nominal OD Outer Jacket	
	Aluminum Armor	Steel Armor		Lbs./1000 Ft.	kg/km	Lbs./1000 Ft.	kg/km	Inch	mm	Inch	mm	Inch	mm

**18 AWG Pairs** Stranded (7x26) TC Cond. • Individual Beldfoil® + Polyester Isolation Tape • Overall Beldfoil Shield (100% Coverage)


Interlocked Armor • PVC Insulation* • PVC Inner Jacket • Chrome PVC Outer Jacket													
CSA C22.2#239, Type ACIC	24511**	25506**	1	154	229	257	382	.030	.76	.32	8.13	.61	15.49
CSA C22.2#174, HLBCD	24512	25514	2	238	354	387	575	.030	.76	.51	12.95	.82	20.83
CSA C22.2#0.3, Clause 4.31	24513	25503	4	335	499	504	750	.030	.76	.63	16.00	.93	23.62
Low Acid Gas, FT4 Flame Test	24514	25505	8	536	798	829	1233	.030	.76	.79	20.27	1.15	29.21
	24515	25501	12	739	1100	1092	1624	.030	.76	1.00	25.40	1.36	34.54
	24520	25517	24	1169	1740	1674	2490	.030	.76	1.36	34.54	1.75	44.45



-25°C Installed • -40°C to +105°C (Dry) (75°C Wet)

**18 AWG Triads** Stranded (7x26) TC Conductors • Individual Beldfoil + Polyester Isolation Tape • Overall Beldfoil Shield (100% Coverage)


Interlocked Armor • PVC Insulation* • PVC Inner Jacket • Chrome PVC Outer Jacket													
CSA C22.2#239, Type ACIC	24516**	25500**	1	166	247	276	411	.030	.76	.34	8.64	.63	16.00
CSA C22.2#174, HLBCD	24517	25522	2	293	436	455	677	.030	.76	.58	14.73	.89	22.61
CSA C22.2#0.3, Clause 4.31	24518	25520	4	391	582	572	851	.030	.76	.66	16.76	.99	25.15
Low Acid Gas, FT4 Flame Test	24519	25523	8	673	1002	988	1470	.030	.76	.88	22.35	1.29	32.77



-25°C Installed • -40°C to +105°C (Dry) (75°C Wet)

**16 AWG Pairs** Stranded (7x24) TC Cond. • Individual Beldfoil + Polyester Isolation Tape • Overall Beldfoil Shield (100% Coverage)


Interlocked Armor • PVC Insulation* • PVC Inner Jacket • Chrome PVC Outer Jacket													
CSA C22.2#239, Type ACIC	24500**	25504**	1	171	254	279	415	.030	.76	.34	8.64	.64	16.26
CSA C22.2#174, HLBCD	24505	25510	2	299	445	455	677	.030	.76	.59	14.99	.89	22.61
CSA C22.2#0.3, Clause 4.31	24502	25511	4	450	670	583	868	.030	.76	.68	17.27	.98	24.89
Low Acid Gas, FT4 Flame Test	24506	25512	6	576	857	880	1310	.030	.76	.79	20.07	1.16	29.46
	24503	25513	8	679	1010	1005	1496	.030	.76	.90	22.86	1.27	32.26
	24504	25518	12	908	1351	1280	1905	.030	.76	1.09	27.69	1.46	37.08
	24510	25519	24	1502	2235	2030	3021	.030	.76	1.49	37.85	1.88	47.75



-25°C Installed • -40°C to +105°C (Dry) (75°C Wet)

**16 AWG Triads** Stranded (7x24) TC Conductors • Individual Beldfoil + Polyester Isolation Tape • Overall Beldfoil Shield (100% Coverage)

Interlocked Armor • PVC Insulation* • PVC Inner Jacket • Chrome PVC Outer Jacket													
CSA C22.2#239, Type ACIC	24501**	25502**	1	195	290	309	460	.030	.76	.36	9.14	.66	16.76
CSA C22.2#174, HLBCD	24507	25507	2	339	505	465	692	.030	.76	.62	15.75	.94	23.88
CSA C22.2#0.3, Clause 4.31	24508	25509	4	464	691	793	1180	.030	.76	.72	18.29	1.05	26.67
Low Acid Gas, FT4 Flame Test	24509	25508	8	807	1201	1250	1860	.030	.76	.96	24.38	1.33	33.78



-25°C Installed • -40°C to +105°C (Dry) (75°C Wet)

Color Code: Pairs — Black and White with Numbers.  
Triads — Black, White and Red with Numbers.

TC = Tinned Copper

\*Note: Add D suffix for XLPE insulation. Example: 24511D.  
\*\*One pair/triad cables have one foil shield and drain wire



For more information, contact Belden Technical Support: 1-800-BELDEN-1 • www.belden.com

# CSA Control and Power Cable

## 600V and 1000V TC/CIC Multi-conductor Cables

### Cable Specifications

- CSA C22.2 #230 Type TC
- CSA C22.2 #239 Control and Instrumentation (600V only)
- CSA C22.2 #38 Type TC (1000V only)
- CSA FT4 70,000 BTU Flame Test
- 90°C Dry & Wet
- -40°C Cold Bend, -25°C Cold Impact
- -25°C Installation temp
- Per CEC Part 1, Suitable for use in hazardous locations:  
Class 1 — Zone 2  
Class 2 — Division 2
- Sunlight Resistant/UV Resistant
- Direct Burial

### To Create a Part Number

Add suffix "S" for Overall Foil Shielding

### Sample Part Number:

**21500S** = 600V CSA Tray Control Cable  
2-conductor, 14 AWG Bare Copper  
Conductor with XLPE Insulation,  
PVC Jacket, and Overall Foil Shield

### Color Codes

No. of Conductors	Color Combination
2	Black & White
3	Black, Red & Blue
4	Black, Red, Blue & White
5 or more	Black & Number Coded

No. of Conductors	Part Numbers					
	14 AWG (7 Strand)		12 AWG (7 Strand)		10 AWG (7 Strand)	
	600V	1000V	600V	1000V	600V	1000V
2	21500	21300	21550	21350	21600	21400
3	21501	21301	21551	21351	21601	21401
4	21502	21302	21552	21352	21602	21402
5	21503	21303	21553	21353	21603	21403
6	21504	21304	21554	21354	21604	21404
7	21505	21305	21555	21355	21605	21405
8	21506	21306	21556	21356	21606	21406
9	21507	21307	21557	21357	21607	21407
10	21508	21308	21558	21358	21608	21408
11	21509	21309	21559	21359	21609	21409
12	21510	21310	21560	21360	21610	21410
13	21511	21311	21561	21361	21611	21411
14	21512	21312	21562	21362	21612	21412
15	21513	21313	21563	21363	21613	21413
16	21514	21314	21564	21364	21614	21414
17	21515	21315	21565	21365	21615	21415
18	21516	21316	21566	21366	21616	21416
19	21517	21317	21567	21367	21617	21417
20	21518	21318	21568	21368	21618	21418
21	21519	21319	21569	21369	21619	21419
22	21520	21320	21570	21370	21620	21420
23	21521	21321	21571	21371	21621	21421
24	21522	21322	21572	21372	21622	21422
25	21523	21323	21573	21373	21623	21423
26	21524	21324	21574	21374	21624	21424
27	21525	21325	21575	21375	21625	21425
28	21526	21326	21576	21376	21626	21426
29	21527	21327	21577	21377	21627	21427
30	21528	21328	21578	21378	21628	21428
31	21529	21329	21579	21379	21629	21429
32	21530	21330	21580	21380	21630	21430
33	21531	21331	21581	21381	21631	21431
34	21532	21332	21582	21382	21632	21432
35	21533	21333	21583	21383	21633	21433
36	21534	21334	21584	21384	21634	21434
37	21535	21335	21585	21385	21635	21435
38	21536	21336	21586	21386	21636	21436
39	21537	21337	21587	21387	21637	21437
40	21538	21338	21588	21388	21638	21438
41	21539	21339	21589	21389	21639	21439
42	21540	21340	21590	21390	21640	21440
43	21541	21341	21591	21391	21641	21441
44	21542	21342	21592	21392	21642	21442
45	21543	21343	21593	21393	21643	21443
46	21544	21344	21594	21394	21644	21444
47	21545	21345	21595	21395	21645	21445
48	21546	21346	21596	21396	21646	21446
49	21547	21347	21597	21397	21647	21447
50	21548	21348	21598	21398	21648	21448

No. of Cond.	Part Numbers									
	8 AWG (7 Strand)		6 AWG (7 Strand)		4 AWG (7 Strand)		3 AWG (7 Strand)		2 AWG (7 Strand)	
	600V	1000V	600V	1000V	600V	1000V	600V	1000V	600V	1000V
2	21650	21450	21653	21453	21656	21456	21659	21459	21662	21462
3	21651	21451	21654	21454	21657	21457	21660	21460	21663	21463
4	21652	21452	21655	21455	21658	21458	21661	21461	21664	21464

No. of Cond.	Part Numbers									
	1 AWG (19 Strand)		1/0 AWG (19 Strand)		2/0 AWG (19 Strand)		3/0 AWG (19 Strand)		4/0 AWG (19 Strand)	
	600V	1000V	600V	1000V	600V	1000V	600V	1000V	600V	1000V
2	21665	21465	21668	21468	21671	21471	21674	21474	21677	21477
3	21666	21466	21669	21469	21672	21472	21675	21475	21678	21478
4	21667	21467	21670	21470	21673	21473	21676	21476	21679	21479



# CSA Control Cable


## 600V CIC Multi-conductor Cables

Description	Part Number	No. of Cond.	Cable Weight		Insulation Thickness		Jacket Thickness		Nominal OD	
			Lbs./1000 Ft.	kg/km	Inch	mm	Inch	mm	Inch	mm

### 14 AWG Stranded (7x22) Bare Copper Conductors

#### Cross-linked Polyethylene Insulation • Black PVC Jacket (Color Code: Black and Numbered)

CSA C22.2#131, Type CIC	<b>22100</b>	2	62	92	.030	.76	.045	1.14	.367	9.32
CSA C22.2#0.3, Clause 4.31 Low Acid Gas FT4 Flame Test	<b>22101</b>	3	81	121	.030	.76	.045	1.14	.388	9.86
	<b>22102</b>	4	101	150	.030	.76	.045	1.14	.423	10.74
	<b>22103</b>	5	122	182	.030	.76	.045	1.14	.462	11.74
	<b>22104</b>	6	143	213	.030	.76	.045	1.14	.504	12.80
	<b>22105</b>	7	160	238	.030	.76	.045	1.14	.504	12.80
	<b>22106</b>	8	197	293	.030	.76	.060	1.52	.576	14.63
	<b>22107</b>	9	220	327	.030	.76	.060	1.52	.618	15.70
	<b>22108</b>	10	226	336	.030	.76	.060	1.52	.669	17.00
	<b>22110</b>	12	279	415	.030	.76	.060	1.52	.689	17.50
	<b>22114</b>	16	357	531	.030	.76	.060	1.52	.764	19.41
	<b>22118</b>	20	467	695	.030	.76	.080	2.03	.886	22.50




-25°C Installed  
-40°C to +90°C (Dry) (75°C Wet)

### 12 AWG Stranded (7x20) Bare Copper Conductors

#### Cross-linked Polyethylene Insulation • Black PVC Jacket (Color Code: Black and Numbered)

CSA C22.2#131, Type CIC	<b>22120</b>	2	82	122	.030	.76	.045	1.14	.405	10.29
CSA C22.2#0.3, Clause 4.31 Low Acid Gas FT4 Flame Test	<b>22121</b>	3	109	162	.030	.76	.045	1.14	.429	10.90
	<b>22122</b>	4	140	208	.030	.76	.045	1.14	.469	11.91
	<b>22123</b>	5	170	253	.030	.76	.045	1.14	.515	13.08
	<b>22124</b>	6	214	319	.030	.76	.060	1.52	.591	15.01
	<b>22125</b>	7	240	357	.030	.76	.060	1.52	.591	15.01
	<b>22126</b>	8	270	402	.030	.76	.060	1.52	.639	16.23
	<b>22127</b>	9	302	449	.030	.76	.060	1.52	.687	17.45
	<b>22128</b>	10	336	500	.030	.76	.060	1.52	.745	18.92
	<b>22130</b>	12	390	580	.030	.76	.060	1.52	.768	19.51
	<b>22134</b>	16	584	869	.030	.76	.080	2.03	.893	22.68
	<b>22138</b>	20	655	975	.030	.76	.080	2.03	.992	25.20




-25°C Installed  
-40°C to +90°C (Dry) (75°C Wet)

### 10 AWG Stranded (7x18) Bare Copper Conductors

#### Cross-linked Polyethylene Insulation • Black PVC Jacket (Color Code: Black and Numbered)

CSA C22.2#131, Type CIC	<b>22140</b>	2	148	220	.030	.76	.045	1.14	.736	18.69
CSA C22.2#0.3, Clause 4.31 Low Acid Gas FT4 Flame Test	<b>22141</b>	3	189	281	.030	.76	.045	1.14	.763	19.38
	<b>22142</b>	4	248	369	.030	.76	.060	1.52	.839	21.31
	<b>22143</b>	5	293	436	.030	.76	.060	1.52	.891	22.63
	<b>22144</b>	6	338	503	.030	.76	.060	1.52	.944	23.98
	<b>22145</b>	7	378	563	.030	.76	.060	1.52	.944	23.98
	<b>22146</b>	8	424	631	.030	.76	.060	1.52	.999	25.38
	<b>22147</b>	9	469	698	.030	.76	.060	1.52	1.074	27.28
	<b>22148</b>	10	548	816	.030	.76	.080	2.03	1.182	30.02
	<b>22150</b>	12	631	939	.030	.76	.080	2.03	1.209	30.71
	<b>22152</b>	14	717	1067	.030	.76	.080	2.03	1.255	31.88
	<b>22154</b>	16	805	1198	.030	.76	.080	2.03	1.307	33.20



-25°C Installed  
-40°C to +90°C (Dry) (75°C Wet)



# CSA Control Cable


## 600V CIC Multi-conductor Cables

Description	Part Number	No. of Cond.	Cable Weight		Insulation Thickness		Jacket Thickness		Nominal OD	
			Lbs./1000 Ft.	kg/km	Inch	mm	Inch	mm	Inch	mm

**8 AWG** Stranded (7x16) Bare Copper Conductors

**Cross-linked Polyethylene Insulation • Black PVC Jacket** (Color Code: Black and Numbered)

CSA C22.2#131, Type CIC	<b>22160</b>	2	240	357	.045	1.14	.060	1.52	.863	21.92
CSA C22.2#0.3, Clause 4.31 Low Acid Gas FT4 Flame Test	<b>22161</b>	3	308	458	.045	1.14	.060	1.52	.898	22.81
	<b>22162</b>	4	379	564	.045	1.14	.060	1.52	.957	24.31




-25°C Installed  
-40°C to +90°C (Dry) (75°C Wet)

**6 AWG** Stranded (7x14) Bare Copper Conductors

**Cross-linked Polyethylene Insulation • Black PVC Jacket** (Color Code: Black and Numbered)

CSA C22.2#131, Type CIC	<b>22170</b>	2	279	415	.060	1.52	.060	1.52	.711	18.06
CSA C22.2#0.3, Clause 4.31 Low Acid Gas FT4 Flame Test	<b>22171</b>	3	383	570	.060	1.52	.060	1.52	.756	19.20




-25°C Installed  
-40°C to +90°C (Dry) (75°C Wet)

**4 AWG** Stranded (7x12) Bare Copper Conductors

**Cross-linked Polyethylene Insulation • Black PVC Jacket** (Color Code: Black and Numbered)


CSA C22.2#131, Type CIC	<b>22180</b>	2	390	580	.060	1.52	.060	1.52	.800	20.32
CSA C22.2#0.3, Clause 4.31 Low Acid Gas FT4 Flame Test	<b>22181</b>	3	580	863	.060	1.52	.080	2.03	.891	22.63



-25°C Installed  
-40°C to +90°C (Dry) (75°C Wet)

## CSA Control Cable

### 600V ACIC and Teck90 Cables — Overview

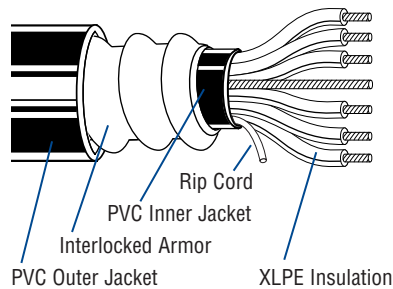

#### Introduction

Belden® Teck90 and ACIC cables are designed to meet demanding industrial needs by combining rugged durability and corrosion resistance with flexibility and easy handling.

Teck90 and ACIC Cables are available in a wide range of in-stock and custom constructions to meet the needs of pulp and paper, chemical, petroleum and other demanding industrial and resource industry environments. They are ideal for use in wet or dry areas; ventilated, non-ventilated or ladder-type cable troughs; ventilated flexible cableways; and for direct burial.

Belden Teck90 Cable is marked with “FT4,” “HL” designations, and cable constructions are certified to CSA Standard C22.2#131 and C22.2#174 for use in a wide range of hazardous locations. Both inner and outer jackets meet the acid gas evolution requirement of 14% maximum required by CSA Standard C22.2#0.3 Clause 4.31.

Custom cables are available upon request.

#### Construction

Class B stranded bare copper conductors, cross-link polyethylene insulation, bare copper ground wire, PVC inner jacket, aluminum steel interlocking armor, PVC outer jacket.

- Galvanized steel interlocking armor available as an option.

#### Voltage Rating

18 to 16 AWG — 600V ACIC

14 to 8 AWG — 600 Volts

14 to 4/0 AWG — 1000 Volts

#### Temperature Rating

-40°C to 90°C (Dry/Wet)

-25°C installed

#### Application

Teck90 and ACIC are general-purpose cables used in the pulp and paper, mining, petroleum and chemical industries as well as in commercial buildings.

Teck90 and ACIC may be used under the following conditions:

- Exposed or concealed wiring in dry or wet conditions
- In ventilated, non-ventilated or ladder-type cable trays in dry or wet conditions
- On walls or beams
- Directly buried
- CEC Class I, Division I locations

#### Minimum Bending Radius

12 times the overall cable diameter

#### Pulling Tensions

The combined use of Kellems grips and pulling eyes is recommended.

#### Design Advantages

##### Insulation Properties

- High tensile strength
- Impact- and crush-resistant
- Heat-resistant
- Excellent elongation
- Moisture-resistant
- Good low temperature properties

##### Electrical Properties

- High insulation resistance
- Low dielectric loss
- High dielectric strength

##### Other Features

- Corrosion-resistant
- Versatile and flexible
- Provides cost savings as conduit and ducts are not required
- ACIC has a blue jacket
- Rip cord for inner jacket

#### Specifications

- CSA Standard C22.2#131
- CSA Standard C22.2#174 “Cables and Cable Glands for Use in Hazardous Locations”
- CSA Standard C22.2#0.3 Clause 4.31 “Low Acid Gas”
- CSA Standard C22.2#0.3 Clause 4.11.4 “Cables with FT4 Marking”

# CSA Control Cable


## 600V ACIC Cables

Description	Part No.	No. of Cond.	Cable Weight		Inner Jacket OD		Armor OD		Outer Jacket		Maximum Pull Tension		Minimum Bend Radius	
			Lbs./1000 Ft.	kg/km	Inch	mm	Inch	mm	Inch	mm	Lbs.	N	Inch	mm

**18 AWG** Stranded (7x26) Bare Copper Conductors • 18 AWG Bare Copper Ground Wire

**Aluminum Interlocked Armor • .030" (.76mm) XLPE Insulation • PVC Inner Jacket • Blue PVC Outer Jacket**

CSA C22.2#239  
FT4 Flame Test



Rip Cord


<b>29030</b>	2	163	243	.32	8.13	.52	13.21	.62	15.75	44	196	7.4	187.96
<b>29031</b>	3	177	263	.34	8.64	.54	13.72	.64	16.26	66	294	7.6	193.04
<b>29032</b>	4	195	290	.37	9.40	.57	14.48	.67	17.02	88	392	8.0	203.20
<b>29033</b>	5	219	326	.41	10.41	.61	15.49	.71	18.03	110	490	8.5	215.90
<b>29034</b>	6	239	356	.45	11.43	.65	16.51	.75	19.05	132	587	9.0	228.60
<b>29035</b>	7	245	365	.45	11.43	.65	16.51	.75	19.05	154	685	9.0	228.60
<b>29036</b>	8	266	396	.48	12.19	.68	17.27	.78	19.81	176	783	9.3	236.22
<b>29038</b>	10	331	493	.56	14.22	.76	19.30	.87	22.10	220	979	10.6	269.24
<b>29040</b>	12	353	525	.62	15.75	.82	20.83	.93	23.62	264	1175	11.1	281.94
<b>29043</b>	15	401	597	.65	16.51	.85	21.59	.96	24.38	330	1469	11.5	292.10
<b>29048</b>	20	466	694	.73	18.54	.93	23.62	1.04	26.42	440	1958	12.4	314.96
<b>29053</b>	25	589	877	.79	20.07	1.05	26.67	1.16	29.46	550	2448	13.9	353.06
<b>29058</b>	30	698	1039	.88	22.35	1.14	28.96	1.25	31.75	660	2937	15.0	381.00
<b>29068</b>	40	827	1231	.97	24.64	1.23	31.24	1.35	34.29	880	3916	16.2	411.48
<b>29078</b>	50	965	1436	1.09	27.69	1.35	34.29	1.47	37.34	1100	4895	17.6	447.04

HAZ LOC  
CSA C22.2#0.3 Clause 4.31 Low Acid Gas

**16 AWG** Stranded (7x24) Bare Copper Conductors • 16 AWG Bare Copper Ground Wire

**Aluminum Interlocked Armor • .030" (.76mm) XLPE Insulation • PVC Inner Jacket • Blue PVC Outer Jacket**

CSA C22.2#239  
FT4 Flame Test



Rip Cord

<b>29017</b>	2	202	301	.34	8.64	.54	13.72	.65	16.51	70	312	7.7	195.58
<b>29004</b>	3	221	329	.36	9.14	.56	14.22	.66	16.76	105	467	7.9	200.66
<b>29018</b>	4	242	360	.39	9.91	.59	14.99	.70	17.78	140	623	8.3	210.82
<b>29019</b>	5	264	393	.42	10.67	.62	15.75	.73	18.54	175	779	8.6	218.44
<b>29005</b>	6	292	435	.46	11.68	.66	16.76	.77	19.56	210	935	9.1	231.14
<b>29020</b>	7	314	467	.47	11.94	.67	17.02	.77	19.56	245	1090	9.2	233.68
<b>29021</b>	8	364	542	.50	12.70	.70	17.78	.80	20.32	280	1246	9.6	243.84
<b>29022</b>	10	412	613	.61	15.49	.81	20.57	.92	23.37	350	1558	10.9	276.86
<b>29006</b>	12	441	656	.63	16.00	.83	21.08	.94	23.88	420	1869	11.2	284.48
<b>29023</b>	15	502	748	.68	17.27	.88	22.35	1.00	25.40	525	2336	11.9	302.26
<b>29007</b>	20	636	947	.77	19.56	1.03	26.16	1.13	28.70	700	3115	13.7	347.98
<b>29024</b>	25	845	1258	.89	22.61	1.15	29.21	1.26	32.00	875	3894	15.1	383.54
<b>29008</b>	30	922	1372	.94	23.88	1.20	30.48	1.30	33.02	1050	4673	15.8	401.32
<b>29009</b>	40	1109	1650	1.06	26.92	1.32	33.53	1.41	35.81	1400	6230	17.3	439.42
<b>29016</b>	50	1306	1944	1.19	30.23	1.45	36.83	1.54	39.12	1750	7788	18.8	477.52
<b>29025</b>	60	1390	2070	1.27	32.26	1.53	38.86	1.66	42.16	2100	9345	19.9	505.46


HAZ LOC  
CSA C22.2#0.3 Clause 4.31 Low Acid Gas

XLPE = Cross-linked Polyethylene


Color Code: #1 conductor is white; remaining conductors are black with number coding. Other color codes available upon request.

# CSA Control Cable

## 600V Teck90 Cables

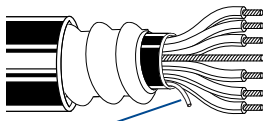Description	Part No.	No. of Cond.	Cable Weight		Inner Jacket OD		Armor OD		Outer Jacket		Maximum Pull Tension		Minimum Bend Radius	
			Lbs./1000 Ft.	kg/km	Inch	mm	Inch	mm	Inch	mm	Lbs.	N	Inch	mm
<b>14 AWG Stranded (7x22) Bare Copper Conductors • 14 AWG Bare Copper Ground Wire</b>														
<b>Aluminum Interlocked Armor • .030" (.76mm) XLPE Insulation • PVC Inner Jacket • Black PVC Outer Jacket</b>														
CSA C22.2#131 FT4 Flame Test  Rip Cord	<b>C5500</b>	2	198	296	.36	9.14	.56	14.22	.66	16.76	108	481	7.8	198.12
	<b>C5501</b>	3	222	331	.39	9.91	.58	14.73	.66	16.76	162	721	8.2	208.28
	<b>C5502</b>	4	251	375	.42	10.67	.62	15.75	.71	18.03	216	961	8.5	215.90
	<b>C5503</b>	5	284	424	.47	11.94	.66	16.76	.74	18.80	270	1202	9.0	228.60
	<b>C5504</b>	6	317	473	.51	12.95	.70	17.78	.78	19.81	324	1442	9.5	241.30
	<b>C5505</b>	7	331	494	.51	12.95	.70	17.78	.78	19.81	378	1682	9.5	241.30
	<b>C5506</b>	8	414	618	.58	14.73	.77	19.56	.86	21.84	432	1922	10.4	264.16
	<b>C5508</b>	10	510	761	.67	17.02	.93	23.62	.95	24.13	540	2403	12.3	312.42
	<b>C5510</b>	12	551	822	.69	17.53	.95	24.13	.97	24.64	648	2884	12.6	320.04
	<b>C5513</b>	15	636	949	.77	19.56	1.03	26.16	1.11	28.19	810	3605	14.1	358.14
	<b>C5518</b>	20	810	1209	.90	22.86	1.16	29.46	1.24	31.50	1080	4806	15.1	383.54
	<b>C5523</b>	25	948	1415	.90	22.86	1.24	31.50	1.33	33.78	1350	6008	16.1	408.94
	<b>C5528</b>	30	1047	1563	1.05	26.67	1.30	33.02	1.40	35.56	1620	7209	16.8	426.72
	<b>C5529</b>	40	1310	1955	1.20	30.48	1.42	36.07	1.51	38.35	2160	9612	18.3	464.82
	HAZ LOC CSA C22.2#0.3 Clause 4.31 Low Acid Gas	<b>C6064</b>	50	1620	2418	1.35	34.29	1.60	40.64	1.66	42.16	2700	12015	20.5

### 12 AWG Stranded (7x20) Bare Copper Conductors • 14 AWG Bare Copper Ground Wire

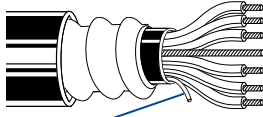Description	Part No.	No. of Cond.	Cable Weight		Inner Jacket OD		Armor OD		Outer Jacket		Maximum Pull Tension		Minimum Bend Radius		
			Lbs./1000 Ft.	kg/km	Inch	mm	Inch	mm	Inch	mm	Lbs.	N	Inch	mm	
<b>12 AWG Stranded (7x20) Bare Copper Conductors • 14 AWG Bare Copper Ground Wire</b>															
<b>Aluminum Interlocked Armor • .030" (.76mm) XLPE Insulation • PVC Inner Jacket • Black PVC Outer Jacket</b>															
CSA C22.2#131 FT4 Flame Test  Rip Cord	<b>C5530</b>	2	225	336	.41	10.41	.60	15.24	.69	17.53	172	765	8.3	210.82	
	<b>C5531</b>	3	261	390	.43	10.92	.62	15.75	.70	17.78	258	1148	8.6	218.44	
	<b>C5532</b>	4	301	449	.47	11.94	.66	16.76	.73	18.54	344	1531	9.1	231.14	
	<b>C5533</b>	5	348	519	.52	13.21	.71	18.03	.78	19.81	430	1914	9.1	231.14	
	<b>C5534</b>	6	435	649	.59	14.99	.78	19.81	.86	21.84	516	2296	10.5	266.70	
	<b>C5535</b>	7	450	672	.59	14.99	.78	19.81	.86	21.84	602	2679	10.5	266.70	
	<b>C5536</b>	8	506	755	.64	16.26	.83	21.08	.92	23.37	688	3062	11.1	281.94	
	<b>C5538</b>	10	633	945	.75	19.05	1.01	25.65	1.02	25.91	860	3827	13.3	337.82	
	<b>C5540</b>	12	696	1039	.77	19.56	1.03	26.16	1.12	28.45	1032	4592	13.5	342.90	
	<b>C5543</b>	15	823	1228	.90	22.86	1.16	29.46	1.24	31.50	1290	5741	15.1	383.54	
	<b>C5548</b>	20	1035	1545	.99	25.15	1.25	31.75	1.34	34.04	1720	7654	16.5	419.10	
	<b>C5553</b>	25	1230	1836	1.10	27.94	1.36	34.54	1.45	36.83	2150	9568	17.6	447.04	
	HAZ LOC CSA C22.2#0.3 Clause 4.31 Low Acid Gas	<b>C5558</b>	30	1390	2075	1.20	30.48	1.46	37.08	1.51	38.35	2580	11481	17.6	447.04

XLPE = Cross-linked Polyethylene

Color Code: 2 conductors — Black, White (If required, a Red conductor can be used in place of White.)  
 3 conductors — Black, Red, Blue (If required, a White conductor can be used in place of Blue.)  
 4 conductors — Black, Red, Blue, White  
 5 or more conductors — Black and numbered


# CSA Control Cable

## 600V Teck90 Cables

Description	Part No.	No. of Cond.	Cable Weight		Inner Jacket OD		Armor OD		Outer Jacket		Maximum Pull Tension		Minimum Bend Radius	
			Lbs./1000 Ft.	kg/km	Inch	mm	Inch	mm	Inch	mm	Lbs.	N	Inch	mm


**10 AWG** Stranded (7x18) Bare Copper Conductors • 12 AWG Bare Copper Ground Wire

**Aluminum Interlocked Armor • .030" (.76mm) XLPE Insulation • PVC Inner Jacket • Black PVC Outer Jacket**

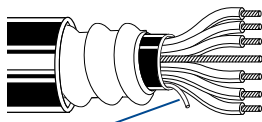CSA C22.2#131 FT4 Flame Test 	<b>C5560</b>	2	278	415	.48	12.19	.66	16.76	.72	18.29	296	1317	8.9	226.06
	<b>C5561</b>	3	327	488	.50	12.70	.70	17.78	.75	19.05	444	1976	9.2	233.68
	<b>C5562</b>	4	405	604	.57	14.48	.77	19.56	.79	20.07	592	2634	10.1	256.64
	<b>C5563</b>	5	487	727	.63	16.00	.83	21.08	.93	23.62	740	3293	11.5	292.10
	<b>C5564</b>	6	556	830	.68	17.27	.88	22.35	.93	23.62	888	3952	11.5	292.10
	<b>C5565</b>	7	627	936	.69	17.53	.89	22.61	.99	25.15	1036	4610	11.8	299.72
	<b>C5566</b>	8	739	1103	.74	18.80	.94	23.88	1.00	25.40	1184	5269	12.4	314.96
	<b>C5568</b>	10	964	1439	.84	21.34	1.10	27.94	1.24	31.50	1480	6586	14.4	365.76
	<b>C5570</b>	12	1067	1593	.93	23.62	1.19	30.23	1.26	32.00	1776	7903	15.6	396.24
	<b>C5573</b>	15	1297	1936	.99	25.15	1.25	31.75	1.37	34.80	2220	9879	16.3	414.02
HAZ LOC CSA C22.2#0.3 Clause 4.31 Low Acid Gas	<b>C5578</b>	20	1546	2307	1.13	28.70	1.39	35.31	1.47	37.34	2960	13172	16.9	429.26
	<b>C5579</b>	25	1802	2690	1.26	32.00	1.52	38.61	1.60	40.64	3700	16465	19.7	500.38
	<b>C5580</b>	30	2142	3197	1.34	34.04	1.60	40.64	1.66	42.16	4440	19758	20.6	523.24

**8 AWG** Stranded (7x16) Bare Copper Conductors • 10 AWG Bare Copper Ground Wire

**Aluminum Interlocked Armor • .045" (1.14mm) XLPE Insulation • PVC Inner Jacket • Black PVC Outer Jacket**

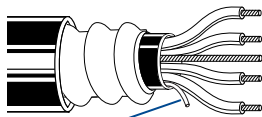CSA C22.2#131 FT4 Flame Test 	<b>C5583</b>	2	407	607	.59	14.99	.78	19.81	.86	21.84	384	1709	10.6	269.24
	<b>C5581</b>	3	471	703	.63	16.00	.83	21.08	.90	22.86	576	2563	10.8	274.32
	<b>C5582</b>	4	606	904	.69	17.53	.89	22.61	.97	24.64	768	3418	12.5	317.50
Dual Rated 600V, 1000V HAZ LOC CSA C22.2#0.3 Clause 4.31 Low Acid Gas														

XLPE = Cross-linked Polyethylene

Color Code: 2 conductors — Black, White (if required, a Red conductor can be used in place of White.)  
 3 conductors — Black, Red, Blue (if required, a White conductor can be used in place of Blue.)  
 4 conductors — Black, Red, Blue, White  
 5 or more conductors — Black and numbered

# CSA Control Cable


## 600V Teck90 Cables

Description	Part No.	No. of Cond.	Cable Weight		Inner Jacket OD		Armor OD		Outer Jacket		Maximum Pull Tension		Minimum Bend Radius	
			Lbs./1000 Ft.	kg/km	Inch	mm	Inch	mm	Inch	mm	Lbs.	N	Inch	mm

**Composite 14 AWG Stranded (7x22) and 12 AWG Stranded (7x20) Bare Copper Conductors • 14 AWG Bare Copper Ground Wire**

**Aluminum Interlocked Armor • .031" (.79mm) XLPE Insulation • PVC Inner Jacket • Black PVC Outer Jacket**

CSA C22.2#131 FT4 Flame Test	<b>6054</b>	3c/14 3c/12	369	549	.560	14.22	.75	19.05	.89	22.61	424	1886	8.4	213.36
---------------------------------	-------------	----------------	-----	-----	------	-------	-----	-------	-----	-------	-----	------	-----	--------




Rip Cord

HAZ LOC  
CSA C22.2#0.3 Clause 4.31 Low Acid Gas

**Composite 14 AWG Stranded (7x22) and 10 AWG Stranded (7x18) Bare Copper Conductors • 12 AWG Bare Copper Ground Wire**

**Aluminum Interlocked Armor • .031" (.79mm) XLPE Insulation • PVC Inner Jacket • Black PVC Outer Jacket**

CSA C22.2#131 FT4 Flame Test	<b>6051</b>	3c/14 3c/10	432	643	.600	15.24	.82	20.83	.92	23.37	608	2705	9.0	228.60
---------------------------------	-------------	----------------	-----	-----	------	-------	-----	-------	-----	-------	-----	------	-----	--------




Rip Cord

HAZ LOC  
CSA C22.2#0.3 Clause 4.31 Low Acid Gas

**Composite 14 AWG Stranded (7x22) and 8 AWG Stranded (7x16) Bare Copper Conductors • 10 AWG Bare Copper Ground Wire**

**Aluminum Interlocked Armor • .046" (1.17mm) XLPE Insulation • PVC Inner Jacket • Black PVC Outer Jacket**

CSA C22.2#131 FT4 Flame Test	<b>6059</b>	3c/14 3c/8	608	905	.700	17.78	.89	22.51	.98	24.92	1160	5160	9.8	248.92
---------------------------------	-------------	---------------	-----	-----	------	-------	-----	-------	-----	-------	------	------	-----	--------




Rip Cord

HAZ LOC  
CSA C22.2#0.3 Clause 4.31 Low Acid Gas

**Composite 14 AWG Stranded (7x22) and 6 AWG Stranded (7x14) Bare Copper Conductors • 8 AWG Bare Copper Ground Wire**

**Aluminum Interlocked Armor • .061" (1.55mm) XLPE Insulation • PVC Inner Jacket • Black PVC Outer Jacket**

CSA C22.2#131 FT4 Flame Test	<b>6060</b>	3c/14 3c/6	849	1264	.810	20.57	1.06	27.00	1.16	29.41	1700	7562	11.6	294.64
---------------------------------	-------------	---------------	-----	------	------	-------	------	-------	------	-------	------	------	------	--------



Rip Cord

HAZ LOC  
CSA C22.2#0.3 Clause 4.31 Low Acid Gas

XLPE = Cross-linked Polyethylene

Color Code: 2 conductors — Black, White (If required, a Red conductor can be used in place of White.)  
3 conductors — Black, Red, Blue (If required, a White conductor can be used in place of Blue.)  
4 conductors — Black, Red, Blue, White  
5 or more conductors — Black and numbered



# CSA Control Cable


## 1000V Teck90 Cables

Description	Part No.	No. of Cond.	Cable Weight		Inner Jacket OD		Armor OD		Outer Jacket		Maximum Pull Tension		Minimum Bend Radius	
			Lbs./1000 Ft.	kg/km	Inch	mm	Inch	mm	Inch	mm	Lbs.	N	Inch	mm

**14 AWG Stranded (7x22) Bare Copper Conductors • 14 AWG Bare Copper Ground Wire**

**Aluminum Interlocked Armor • .045" (1.14mm) XLPE Insulation • PVC Inner Jacket • Black PVC Outer Jacket**

CSA C22.2#131	<b>C5701</b>	3	251	374	.47	11.94	.67	17.02	.73	18.54	162	721	9.2	233.68
FT4 Flame Test	<b>C5702</b>	4	301	448	.51	12.95	.71	18.03	.81	20.57	216	961	9.7	246.38

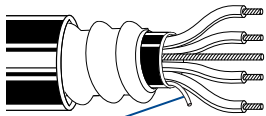


Rip Cord

HAZ LOC  
CSA C22.2#0.3 Clause 4.31 Low Acid Gas

**12 AWG Stranded (7x20) Bare Copper Conductors • 14 AWG Bare Copper Ground Wire**

**Aluminum Interlocked Armor • .045" (1.14mm) XLPE Insulation • PVC Inner Jacket • Black PVC Outer Jacket**

CSA C22.2#131	<b>C5730</b>	2	253	377	.48	12.19	.68	17.27	.74	18.80	172	765	9.3	236.22
FT4 Flame Test	<b>C5731</b>	3	291	433	.51	12.95	.71	18.03	.76	19.30	258	1148	9.7	246.38
	<b>C5732</b>	4	368	548	.59	14.99	.75	19.05	.85	21.59	344	1531	10.8	274.32

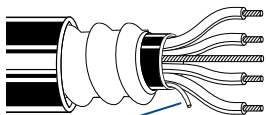


Rip Cord

HAZ LOC  
CSA C22.2#0.3 Clause 4.31 Low Acid Gas

**10 AWG Stranded (7x18) Bare Copper Conductors • 12 AWG Bare Copper Ground Wire**

**Aluminum Interlocked Armor • .045" (1.14mm) XLPE Insulation • PVC Inner Jacket • Black PVC Outer Jacket**

CSA C22.2#131	<b>C5760</b>	2	285	424	.56	14.22	.79	19.99	.70	17.71	296	1317	10.3	261.62
FT4 Flame Test	<b>C5761</b>	3	389	581	.59	14.99	.79	20.07	.85	21.59	444	1976	10.3	261.62
	<b>C5762</b>	4	460	687	.65	16.51	.85	21.59	.90	22.86	592	2634	11.5	292.10

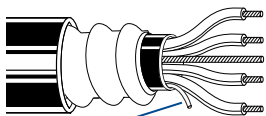


Rip Cord

HAZ LOC  
CSA C22.2#0.3 Clause 4.31 Low Acid Gas

**8 AWG Stranded (7x16) Bare Copper Conductors • 10 AWG Bare Copper Ground Wire**

**Aluminum Interlocked Armor • .045" (1.14mm) XLPE Insulation • PVC Inner Jacket • Black PVC Outer Jacket**

CSA C22.2#131	<b>C5583</b>	2	407	607	.59	14.99	.78	19.81	.86	21.84	384	1709	10.6	269.24
FT4 Flame Test	<b>C5581</b>	3	471	703	.63	16.00	.83	21.08	.90	22.86	576	2563	10.8	274.32
	<b>C5582</b>	4	606	905	.69	17.53	.89	22.61	.97	24.64	768	3418	12.5	317.50

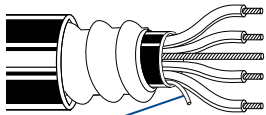

Rip Cord

Dual Rated 600V, 1000V  
HAZ LOC  
CSA C22.2#0.3 Clause 4.31 Low Acid Gas

XLPE = Cross-linked Polyethylene

Color Code: 2 conductors — Black, White (If required, a Red conductor can be used in place of White.)  
3 conductors — Black, Red, Blue (If required, a White conductor can be used in place of Blue.)  
4 conductors — Black, Red, Blue, White  
5 or more conductors — Black and numbered

# CSA Control Cable


## 1000V Teck90 Cables

Description	Part No.	No. of Cond.	Cable Weight		Inner Jacket OD		Armor OD		Outer Jacket		Maximum Pull Tension		Minimum Bend Radius	
			Lbs./1000 Ft.	kg/km	Inch	mm	Inch	mm	Inch	mm	Lbs.	N	Inch	mm

**6 AWG Stranded (7x14) Bare Copper Conductors • 8 AWG Bare Copper Ground Wire**

**Aluminum Interlocked Armor • .060" (1.53mm) XLPE Insulation • PVC Inner Jacket • Black PVC Outer Jacket**

CSA C22.2#131 FT4 Flame Test	<b>C5590</b>	2	567	844	.73	18.54	.99	25.15	1.10	27.94	610	2713	12.8	325.12
	<b>C5591</b>	3	685	1019	.78	19.81	1.04	26.42	1.15	29.21	915	4072	13.4	340.36
	<b>C5592</b>	4	927	1380	.89	22.61	1.15	29.21	1.24	31.50	1220	5429	14.9	378.46

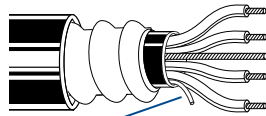


Rip Cord

HAZ LOC  
CSA C22.2#0.3 Clause 4.31 Low Acid Gas

**4 AWG Stranded (7x12) Bare Copper Conductors • 8 AWG Bare Copper Ground Wire**

**Aluminum Interlocked Armor • .060" (1.53mm) XLPE Insulation • PVC Inner Jacket • Black PVC Outer Jacket**

CSA C22.2#131 FT4 Flame Test	<b>C5601</b>	3	961	1430	.91	23.11	1.17	29.72	1.23	31.24	1455	6475	15.2	386.08
	<b>C5602</b>	4	1202	1794	.91	23.11	1.25	31.75	1.33	33.78	1940	8633	16.2	411.48

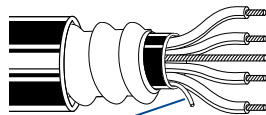


Rip Cord

HAZ LOC  
CSA C22.2#0.3 Clause 4.31 Low Acid Gas

**3 AWG Stranded (7x11) Bare Copper Conductors • 6 AWG Bare Copper Ground Wire**

**Aluminum Interlocked Armor • .060" (1.53mm) XLPE Insulation • PVC Inner Jacket • Black PVC Outer Jacket**

CSA C22.2#131 FT4 Flame Test	<b>C5611</b>	3	1126	1681	.97	24.64	1.23	31.24	1.30	33.02	1836	8170	15.8	401.32
---------------------------------	--------------	---	------	------	-----	-------	------	-------	------	-------	------	------	------	--------

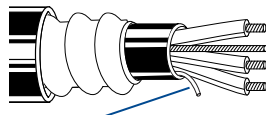


Rip Cord

HAZ LOC  
CSA C22.2#0.3 Clause 4.31 Low Acid Gas

**2 AWG Stranded (7x10) Bare Copper Conductors • 6 AWG Bare Copper Ground Wire**

**Aluminum Interlocked Armor • .060" (1.53mm) XLPE Insulation • PVC Inner Jacket • Black PVC Outer Jacket**

CSA C22.2#131 FT4 Flame Test	<b>C5621</b>	3	1291	1927	1.02	25.91	1.28	32.51	1.37	34.80	2316	10302	16.5	419.10
	<b>C5622</b>	4	1691	2524	1.12	28.45	1.38	35.05	1.48	37.59	3088	13736	17.7	449.58

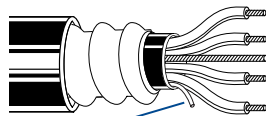

Rip Cord

HAZ LOC  
CSA C22.2#0.3 Clause 4.31 Low Acid Gas

XLPE = Cross-linked Polyethylene

Color Code: 2 conductors — Black, White (If required, a Red conductor can be used in place of White.)  
3 conductors — Black, Red, Blue (If required, a White conductor can be used in place of Blue.)  
4 conductors — Black, Red, Blue, White

# CSA Control Cable


## 1000V Teck90 Cables

Description	Part No.	No. of Cond.	Cable Weight		Inner Jacket OD		Armor OD		Outer Jacket		Maximum Pull Tension		Minimum Bend Radius	
			Lbs./1000 Ft.	kg/km	Inch	mm	Inch	mm	Inch	mm	Lbs.	N	Inch	mm

**1 AWG Stranded (19x14) Bare Copper Conductors • 6 AWG Bare Copper Ground Wire**

**Aluminum Interlocked Armor • .080" (2.03mm) XLPE Insulation • PVC Inner Jacket • Black PVC Outer Jacket**

CSA C22.2#131	<b>C5625</b>	3	1620	2411	1.25	31.75	1.51	38.35	1.59	40.39	1980	8807	19.1	485.14
FT4 Flame Test	<b>C5626</b>	4	2173	3234	1.34	34.04	1.57	39.88	1.68	42.67	2680	11921	20.2	513.08




HAZ LOC  
CSA C22.2#0.3 Clause 4.31 Low Acid Gas

**1/0 AWG Stranded (19x12) Bare Copper Conductors • 6 AWG Bare Copper Ground Wire**

**Aluminum Interlocked Armor • .080" (2.03mm) XLPE Insulation • PVC Inner Jacket • Black PVC Outer Jacket**

CSA C22.2#131	<b>C5627</b>	3	1912	2854	1.34	34.04	1.60	40.64	1.67	42.42	3582	15940	20.0	508.0
FT4 Flame Test	<b>6164</b>	4	2514	3742	1.44	36.58	1.67	42.42	1.78	45.21	4700	20906	21.4	543.56




HAZ LOC  
CSA C22.2#0.3 Clause 4.31 Low Acid Gas

**2/0 AWG Stranded (19x11) Bare Copper Conductors • 6 AWG Bare Copper Ground Wire**

**Aluminum Interlocked Armor • .080" (2.03mm) XLPE Insulation • PVC Inner Jacket • Black PVC Outer Jacket**

CSA C22.2#131	<b>C5635</b>	3	2300	3423	1.40	35.56	1.63	41.40	1.74	44.20	4200	12010	20.9	530.86
FT4 Flame Test	<b>6157</b>	4	3039	4523	1.55	39.37	1.84	46.74	1.95	49.53	5500	24465	23.4	594.36




HAZ LOC  
CSA C22.2#0.3 Clause 4.31 Low Acid Gas

**3/0 AWG Stranded (19x10) Bare Copper Conductors • 4 AWG Bare Copper Ground Wire**

**Aluminum Interlocked Armor • .080" (2.03mm) XLPE Insulation • PVC Inner Jacket • Black PVC Outer Jacket**

CSA C22.2#131	<b>6163</b>	3	2905	4324	1.51	38.10	1.80	45.72	1.91	48.26	5020	11121	22.9	579.12
FT4 Flame Test	<b>6179</b>	4	3700	5506	1.67	42.42	1.96	49.78	2.07	52.58	6500	28913	24.8	629.92




HAZ LOC  
CSA C22.2#0.3 Clause 4.31 Low Acid Gas

**4/0 AWG Stranded (19x9.5) Bare Copper Conductors • 4 AWG Bare Copper Ground Wire**

**Aluminum Interlocked Armor • .080" (2.03mm) XLPE Insulation • PVC Inner Jacket • Black PVC Outer Jacket**

CSA C22.2#131	<b>6193</b>	3	3450	5134	1.63	41.40	1.92	48.77	2.03	51.56	6650	29580	24.4	619.76
FT4 Flame Test														



HAZ LOC  
CSA C22.2#0.3 Clause 4.31 Low Acid Gas

XLPE = Cross-linked Polyethylene

Color Code: 3 conductors — Black, Red, Blue (If required, a White conductor can be used in place of Blue.)  
4 conductors — Black, Red, Blue, White

# CSA Control Cable

## 1000V Variable Frequency Drive Cable

### Cable Specifications

- CSA C22.2 #38 Type TC
- CSA C22.2 #230 Type TC
- CSA FT4 70,000 BTU Flame Test
- 90°C Dry and Wet
- -40°C Cold Bend, -25°C Cold Impact
- -25°C Installation temp
- Per CEC Part 1, Suitable for Use in Hazardous Locations:  
Class 1 — Zone 2  
Class 2 — Division 2
- Sunlight Resistant/UV Resistant
- Direct Burial

### 14 to 2 AWG with Foil/Braid Shield

Belden's classic line of VFD cables, with foil/braid shield, is offered in 14 to 2 AWG, and continues to be the highest-performing solution in the market. The oversized XLPE insulation provides the lowest capacitance available in a VFD cable. Its highly effective dual shielding provides the lowest resistance to ground path, which improves common mode current containment. Included are a full-size, insulated green ground wire with a yellow stripe, as well as a drain wire for ease of installation and termination. The 85% braid coverage offers optimum EMI low frequency noise protection, while the 100% aluminum/Mylar tape offers RFI high frequency noise protection. Cables are round and smooth for proper sealing of glands and molding applications.


### Large AWG (1 to 4/0) with Copper Tape Shield, Symmetrical Design

Belden's symmetrical design combines the benefits of our classic line of VFD cables, with additional features for use on larger, more powerful AC motor drives. Its highly effective shielding provides a low resistance ground path, which improves common mode current containment. The spirally applied dual copper tapes provide improved flexibility and EMI/RFI noise protection. Three symmetrical bare ground wires provide a balanced ground system. This reduces the likelihood of premature motor bearing or motor insulation failure.

Description	Part Number	AWG	Stranding	Shield
-------------	-------------	-----	-----------	--------


**14 to 2 AWG** (3) Stranded Bare Copper Circuit Conductors + (1) Full-sized PVC Insulated Ground • Overall Beldfoil® (100% Coverage) + TC Braid Shield (85% Coverage) • Full Size TC Drain Wire (ICEA Method 4 Color Code: Black and Numbered, Green/Yellow Ground)

#### XLPE Insulation • Black Sunlight- and Oil-resistant PVC Jacket

<b>1000V CSA TC</b>	<b>29550</b>	14	7	Beldfoil (100% Coverage) + TC Braid (85% Coverage)
FT4	<b>29551</b>	12	7	
RW90 Circuit Conductors	<b>29552</b>	10	7	
	<b>29553</b>	8	7	
	<b>29554</b>	6	7	
	<b>29555</b>	4	7	
	<b>29556</b>	2	7	

**1 to 4/0 AWG** (3) Stranded Bare Copper Circuit Conductors + (3) Symmetrical Bare Copper Grounds • (2) Spiral Copper Tape Shields

#### XLPE Insulation • Black Sunlight- and Oil-resistant PVC Jacket

<b>1000V CSA TC</b>	<b>29557</b>	1	19	(2) Spiral Copper Tapes
FT4	<b>29558</b>	1/0	19	
XHHW-2 Circuit Conductors	<b>29559</b>	2/0	19	
	<b>29560</b>	3/0	19	
	<b>29561</b>	4/0	19	

Products listed are subject to minimum order quantities.

# Technical Information

## Gland Information for Armored Cables

### Thomas and Betts

Part No.	Hub Size NPT	Range Over Jacket			
		Minimum		Maximum	
		Inch	mm	Inch	mm
ST050-462	1/2	.525	13.34	.650	16.51
ST050-464	1/2	.600	15.24	.760	19.30
ST050-465	1/2	.725	18.42	.885	22.48
ST050-466	1/2	.825	20.96	.985	25.02
ST075-467	3/4	.880	22.35	1.065	27.05
ST075-468	3/4	1.025	26.04	1.205	30.61
ST100-469	1	1.187	30.15	1.375	34.93
ST125-470	1-1/4	1.350	34.29	1.625	41.28
ST125-550	1-1/4	1.500	38.10	1.625	41.28
ST125-471	1-1/4	1.600	40.64	1.875	47.63
ST150-472	1-1/2	1.700	43.18	1.965	49.91
ST150-473	1-1/2	1.900	48.26	2.187	55.55
ST200-551	2	1.900	48.26	2.187	55.55
ST200-474	2	2.100	53.34	2.375	60.33
ST200-475	2	2.300	58.42	2.565	65.15
ST200-476	2	2.500	63.50	2.750	69.85
ST250-477	2-1/2	2.380	60.45	2.640	67.06
ST250-478	2-1/2	2.580	65.53	2.840	72.14
ST300-479	3	2.790	70.87	3.060	77.72
ST300-480	3	3.000	76.20	3.270	83.06
ST300-481	3	3.210	81.53	3.480	88.39
ST350-482	3-1/2	3.420	86.67	3.690	93.73
ST350-483	3-1/2	3.610	91.69	3.870	98.30
ST400-484	4	3.810	96.77	4.030	102.36
ST400-485	4	3.965	100.71	4.185	106.30
ST400-486	4	4.120	104.65	4.340	110.24

### Crouse Hinds

NPT Thread Size	Armor OD Range (Inch)	Non-Hazardous Part No.	Hazardous Part No.
1/2	.440 to .650	TMC165	TMCX165*
3/4	.600 to .850	TMC285	TMCX285*
1	.800 to 1.120	TMC3112	TMCX3112*
1-1/4	1.100 to 1.400	TMC4140	TMCX4140*
1-1/2	1.330 to 1.610	TMC5161	TMCX5161*
2	1.570 to 2.060	TMC6206	TMCX6206*
2-1/2	1.930 to 2.470	TMC7247	TMCX7247*
3	2.450 to 3.020	TMC8302	TMCX8302
3-1/2	2.950 to 3.520	TMC9352	TMCX9352
4	3.500 to 4.020	TMC10402	TMCX10402

\* TMCX Catalog numbers listed are suitable for use with Type TC tray cable in hazardous locations when installed in accordance with NEC Articles 501-5(e) and 502-5. TMCX series is not suitable for use in Class III locations when used with tray cable.

### Hawke

Hawke Size Ref.	Standard Seal 1348 Diameter				Alternative Seal 1498 Diameter				NPT Size
	Minimum		Maximum		Minimum		Maximum		
	Inch	mm	Inch	mm	Inch	mm	Inch	mm	
711-A	.590	14.99	.820	20.83	.470	11.94	.610	15.49	1/2
711-B	.790	20.07	.060	26.92	.630	16.00	.840	21.34	3/4
711-C	.930	23.62	1.310	33.27	.830	21.08	1.090	27.69	1
711-C2	1.260	32.00	1.690	42.93	1.100	27.94	1.340	34.04	1-1/4
711-D	1.690	42.93	2.060	52.32	1.300	33.02	1.610	40.89	2
711-E	2.050	52.07	2.560	65.02	1.810	45.97	2.160	54.86	2-1/2
711-F	2.560	65.02	3.070	77.98	2.240	56.90	2.640	67.06	3
711-H	2.990	75.95	3.520	89.41	Special Order				3-1/2
711-J	3.500	88.90	4.110	104.39	Special Order				4

### Adalet — PLM

Part No.**	Diameter Over Jacket				Conduit Size
	Minimum		Maximum		
	Inch	mm	Inch	mm	
PS/PSX 45-05	.350	8.89	.450	11.43	1/2
PS/PSX 55-05	.450	11.43	.550	13.97	1/2
PS/PSX 65-05	.550	13.97	.650	16.51	1/2
PS/PSX 75-05	.650	16.51	.750	19.05	1/2
PS/PSX 85-05	.750	19.05	.850	21.59	1/2
PS/PSX 95-05	.850	21.59	.950	24.13	1/2
PS/PSX 99-07	.850	21.59	.990	25.15	3/4
PS/PSX 107-07	.920	23.37	1.070	27.18	3/4
PS/PSX 113-07	.980	24.89	1.130	28.70	3/4
PS/PSX 121-07	1.070	27.18	1.210	30.73	3/4
PS/PSX 112-10	1.000	25.40	1.120	28.45	1
PS/PSX 125-10	1.120	28.45	1.250	31.25	1
PS/PSX 138-10	1.220	30.99	1.380	35.05	1
PS/PSX 138-12	1.280	32.51	1.380	35.05	1-1/4
PS/PSX 156-12	1.380	35.05	1.560	39.62	1-1/4
PS/PSX 174-12	1.560	39.62	1.740	44.20	1-1/4
PS/PSX 188-12	1.740	44.20	1.880	47.75	1-1/4
PS/PSX 174-15	1.600	40.64	1.740	44.20	1-1/2
PS/PSX 188-15	1.740	44.20	1.880	47.75	1-1/2
PS/PSX 200-15	1.880	47.75	2.000	50.80	1-1/2
PS/PSX 218-15	2.000	50.80	2.180	55.37	1-1/2
PS/PSX 219-20	2.050	52.07	2.190	55.63	2
PS/PSX 236-20	2.190	55.63	2.360	59.94	2
PS/PSX 247-20	2.350	59.69	2.470	62.74	2
PS/PSX 261-20	2.470	62.74	2.610	66.29	2
PS/PSX 263-25	2.460	62.48	2.630	66.80	2-1/2
PS/PSX 280-25	2.620	66.55	2.800	71.12	2-1/2
PS/PSX 296-25	2.800	71.12	2.960	75.18	2-1/2
PS/PSX 297-30	2.800	71.12	2.970	75.44	3
PS/PSX 311-30	2.950	74.93	3.110	78.99	3
PS/PSX 327-30	3.100	78.74	3.270	83.06	3
PS/PSX 343-30	3.260	82.80	3.430	87.12	3
PS/PSX 359-30	3.420	86.87	3.590	91.19	3
PS/PSX 375-35	3.520	89.41	3.750	95.25	3-1/2
PS/PSX 392-35	3.750	95.25	3.920	99.57	3-1/2
PS/PSX 412-35	3.900	99.06	4.120	104.65	3-1/2
PS/PSX 423-40	4.050	102.87	4.230	107.44	4
PS/PSX 437-40	4.200	106.68	4.370	111.00	4
PS/PSX 451-40	4.340	110.24	4.510	114.55	4
PS/PSX 462-40	4.430	112.52	4.620	117.35	4

\*\* Use PS for non-hazardous locations and PSX for hazardous locations.



## Technical Information

### LSZH Jacketed Cables and Hazardous Locations Reference

#### Approvals and Standards/Performance Data for Low-Smoke, Zero-Halogen Jacketed Cable

XLPE Insulation	
Physical: (per UL-44)	
Tensile (min)	1500 psi
Elongation (min)	150%
Deformation (max)	3.35
LOI	27

Haloarrest® Jacket	
Physical	
Tensile (min)	1500 psi
Elongation (min)	100%
Tear resistance	74 lbs/inch
LOI	38
Halogen Content	
IEC 754-1	0%
BS6425	0%
MIL-C-24643	<0.2%
NBS Smoke Chamber (.100" wall)	
Flaming Mode	141 D <sub>m</sub> corrected typical
Smoldering Mode	311 D <sub>m</sub> corrected typical
Acid Gas	
IEC 754-2	4.3 pH, 28 μS/cm
VDE 0472 Part 813	4.3 pH, 27 μS/cm
Toxicity Index	
NES 713	1

#### Low-Smoke, Zero-Halogen Jacketed Cable Specifications

##### 600V, 90°C TC-LS NEC 340/UL 1277 & 1685

##### Instrumentation

- 18 to 12 AWG, BC or TC
- 90°C XLPE insulation
- UL 44 XHHW-2 — 90°C dry/wet
- Shielded or unshielded
- Haloarrest jacket

##### Control or Power

- 14 to 4/0 AWG, BC or TC
- 90°C XLPE insulation
- UL 44 XHHW-2 — 90°C dry/wet
- Shielded or unshielded
- Haloarrest jacket

#### Hazardous Locations Cable Reference

##### Article 500

###### Class I Division 1 Hazards

- Locations where flammable gases or vapors may exist under normal operating conditions, under frequent repair or maintenance operations, or where breakdown or faulty operation of process equipment might also cause simultaneous failure of electrical equipment.
- Use conduit or MI cable with approved termination fittings.

###### Class I Division 2 Hazards

- Locations where flammable gases, vapors or volatile liquids are handled either in a closed system, or confined within suitable enclosures, or where hazardous concentrations are normally prevented by positive mechanical ventilation. Areas adjacent to Division 1 areas belong in Division 2.
- Use PLTC, ITC, TC, MC, MV, MI with approved termination fittings.

###### Class II Division 1

- Locations where combustible dusts exist under normal conditions.
- Use conduit or MI with approved termination fittings.

###### Class II Division 2

- Locations where combustible dusts exist under abnormal conditions.
- Use conduit or PLTC, ITC, TC, MC with ventilated channel cable trays.
- Use conduit or MC, MI with approved termination fittings.

###### Class III Division 1

- Locations where easily ignitable fibers and flyings exist under normal conditions.
- Use conduit or MC, MI with approved termination fittings.

###### Class III Division 2

- Locations where easily ignitable fibers and flyings exist under abnormal conditions.
- Use conduit or MC, MI with approved termination fittings.

##### Article 504

###### Intrinsically Safe

- Equipment and wiring that are incapable of releasing sufficient electrical energy under normal or abnormal conditions to cause ignition of a specific hazardous atmospheric mixture in its most easily ignited concentration.
- Use CL3, CL2, PLTC, TC or CM cable, colored light blue, with approved sealing and separation.

##### Hazardous Location Cable Reference per Canadian Electrical Code CEC Section 18

All Armored cables printed "HL" per CSA C22.2 #174 are rated for all Hazardous Location Classes and Divisions (ie. Class 1, Div. 1).

All Tray Cables printed "TC" per per CSA C22.2 #230 are rated for all Hazardous Location Classes and Division 2 or lower. (ie. Class 1, Div. 2 or lower).

## Technical Information

### UL Approved Insulation/Jacketing Options

UL Listed for MC and TC			
Insulation/Jacket	Max. Temp Rating		Flame Tests
	Wet	Dry	
PVC-Nylon/PVC (THHN or THWN) 14 AWG & larger	75°C	90°C	UL 1685 FT4/ IEEE 1202/383 ICEA T-29-520
PVC-Nylon/PVC (TFN or TFFN) 16 & 18 AWG	NA	90°C	UL 1685 FT4/ IEEE 1202/383 ICEA T-29-520
XLPE/PVC or CPE (XHHW-2) 14 AWG & larger	90°C	90°C	UL 1685 FT4/ IEEE 1202/383 VW-1 rated singles ICEA T-29-520
XLPE/PVC or CPE (RFH-2) 16 & 18 AWG	75°C	75°C	UL 1685 FT4/ IEEE 1202/383 VW-1 rated singles ICEA T-29-520
FRPO/PVC 18 AWG & larger	—	75°C	UL 1685
TPE/TPE	75°C	90°C	UL 1685
FRPO/PVC	75°C	90°C	UL 1685
XLPE/Haloarrest (XHHW-2) 14 AWG & larger	90°C	90°C	UL 1685 FT4/IEEE 1202/383 ICEA T-29-520
XLPE/Haloarrest (RFH-2) 16 & 18 AWG	75°C	75°C	UL 1685 FT4/IEEE 1202/383 ICEA T-29-520
FEP/PVC	90°C	90°C	UL 1685

UL Listed for PLTC	
Insulation/Jacket	Max. Temp Rating
XLPE/PVC	90°C
XLPE/CPE	90°C
PVC/PVC	105°C
PVC/CPE	105°C
PE/PVC	75°C
FPE/PVC	75°C
TPE/TPE	105°C
XLPE/Haloarrest®	90°C
FEP/FEP	200°C

### Abbreviations Key

<b>CPE</b>	Chlorinated Polyethylene
<b>FEP</b>	Fluorinated Ethylene-propylene
<b>FPE</b>	Foam Polyethylene
<b>FRPO</b>	Flame-Retardant Polyolefin
<b>PE</b>	Polyethylene
<b>PVC</b>	Polyvinyl Chloride Nylon insulated singles are type THHN or THWN for conductors 14 AWG or larger. Conductor sizes 16 and 18 AWG are Type TFN or TFFN singles.
<b>TPE</b>	Thermoplastic Elastomer
<b>XLPE</b>	Cross-Linked Polyethylene Cross-Linked Polyethylene (XLPE) insulated singles are type XHHW-2 for conductors 14 AWG or larger. Conductor sizes 16 and 18 AWG are RFH-2.

### Vertical Tray Flame Test Comparison

Test	UL-1685 (UL-1581)	FT4/IEEE 1202/ IEEE 383-2003	IEEE 383-1974	IEC 323-3	ICEA T-29-520
<b>Flame Test Chamber</b>	Vertical Tray	Vertical Tray	Vertical Tray	Vertical Tray	Vertical Tray
<b>Burner Type</b>	Ribbon gas burner	Ribbon gas burner	Ribbon gas burner	Ribbon gas burner	Ribbon gas burner
<b>Theoretical Heat Input</b>	70,000 BTU/hr	70,000 BTU/hr	70,000 BTU/hr	70,000 BTU/hr	210,000 BTU/hr
<b>Burner Positioning</b>	horizontal 3" from samples  18" from tray base	20° up from horizontal 2.95" from cable surface 11.8" above floor	horizontal 3" from samples 18" above tray bottom	horizontal 2.95" from cable surface 23.6" above floor	horizontal 8-1/4" from cable surface 12-1/4" above tray base
<b>Tray Dimensions</b>	8' length 12" width 3" side flanges	9.84' length 11.81" width 2.85" side flanges	8' length 12" width 3" side flanges	11.5' length 19.7" width none	8' length 12" width 3" side flanges
<b>Sample Spacing</b>	1/2 cable diameter	1/2 cable diameter	1/2 cable diameter	lesser of 1/2 cable diameter and .78"	1/2 cable diameter
<b>Duration of Flame Application</b>	20 minutes	20 minutes	20 minutes	20 minutes	20 minutes
<b>Mode of Failure</b>	Cable blistering or charring has reached the top of the sample after the cable has self-extinguished.	Cable char has exceeded a length of 4.92'.	Cable blistering or charring has reached the top of the sample after the cable has self-extinguished.	Cable charring has reached a height of 98.4" above the bottom of the burner.	Cable blistering or charring has reached the top of the sample after the cable has self-extinguished.